

Underlay System for Laminate & Engineered Wood



Redupax® Benefits:

- ◆ Noise reducing impact insulation system for wood laminate and engineered wood floors
- ◆ Free-floating, economical system saves installation time and money
- ◆ Engineered with built-in self leveling properties that can eliminate costly substrate preparation
- ◆ Natural wood product with the added benefit of increased thermal insulation
- ◆ High smoothing qualities creating a beautiful finished floor that can also increase the lifetime of the finished floor
- ◆ Provided with a special VVP paper protective covering for easy installation

Acoustical Performance:

Building Construction	IIC	FIIC
Wood Structure	IIC 55	FIIC 54
Concrete (6" slab)	IIC 52	Pending


Visit www.acousticalsolutions.com for field and lab tests.

Note: Results may vary depending upon building and floor configurations.


Test procedure methods per standards set forth by ASTM E2179-03 and ISO 717-2.



Typical Floor Construction

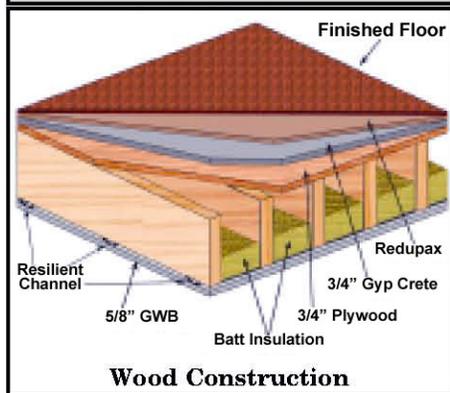

Wood Construction

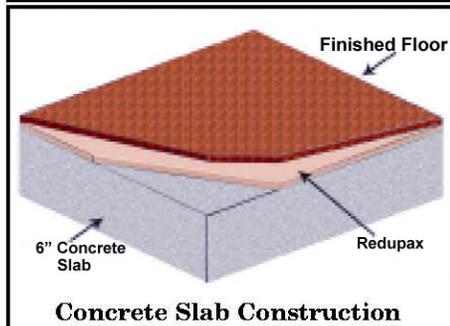

Concrete Slab Construction

Product Specifications:

- ◆ 3/8" thick
- ◆ 23 1/4" x 33 7/8"
- ◆ 16 boards per pack
- ◆ 87.4 sq. ft. per pack
- ◆ 2,447 sq. ft. per skid
- ◆ 28 packs per skid
- ◆ 36 lbs. per pack
- ◆ 1,014 lbs. per skid
- ◆ 100% natural wood product made from recycle material

Accessories:

- ◆ 4 mil poly
- ◆ Perimeter isolation
- ◆ Poly tape
- ◆ Acoustical caulk

Warranty:

Impacta™ Underlayments will remain responsible for the performance/consistent quality as long as they have installed according to the written instructions supplied by Sound Seal® and in situations where the specific Impacta model is meant to be installed. Any liability for sub-sequential damage is not accepted. The sound reducing capabilities of Impacta underlayments have been tested under laboratories conditions and therefore may differ in other situations.



Tel. 800.782.5742
Fax 804.346.8808

www.acousticalsolutions.com
info@acousticalsolutions.com

