

Ronningen-Petter™ DCF-800 Twin



Mechanically Cleaned Filter System

The DCF-800 Twin Actuator disc clean filter (DCF) is an innovative, proven solution for filtering a wide range of highly viscous, sticky, quick-drying liquids. The DCF-800 Twin features dual pneumatically driven actuators for longer service life. The FluidSeal™ option features an advanced dual-seal design that protects against leakage. A separate wash line can be connected to the FluidSeal for even longer seal life and greater protection.

Designed to address the challenges of increasing environmental costs and pressures, loss of valuable product, and the need for greater operator safety, the DCF is like no other filtration system on the market.

Key benefits include:

- No loss of valuable product caused by media changeout
- No replacement media costs or disposal needs, and reduced labor demands
- Mechanically cleaned permanent media
- Reduced operator exposure
- Increased profitability – improves overall system efficiency and reduces downtime
- Space-saving design – small, compact footprint
- Collection and removal of contaminant from fluid being filtered – with no interruption of operation
- Unattended operation capability

How the DCF-800 Twin works

The patented design uses a spring-loaded cleaning disc that travels up and down inside the filter media – removing collected contaminants. Filtrate flows from the top down and from the inside of the media outward to increase retention of undesirable solids. Contaminants are trapped on the screen for easy removal and evacuation to the purge collection chamber.

On the downstroke, any remaining contaminants are driven downward. This process concentrates the solids for easy, complete elimination through the purge chamber.



On the upstroke, the cleaning disc removes particles from the media surface. System fluid flow washes the particles downward toward the purge chamber past the cleaning disc.



RPA Process Technologies

Ronningen-Petter • Aoustin • Filtres Philippe • Filtres Vernay • Malaxeurs Guittard

**Industrial liquid filtration,
separation and mixing solutions**

Ronningen-Petter DCF-800 Twin

Mechanically Cleaned Filter System w/Twin Actuators

Product Specifications

Dimensions

Weight: 75 lbs (34 kg)
Height: 58.2 in. (1,478 mm)
Service: 72.1" in. (1,832 mm)
Footprint: 15.8 in. (402 mm) x
15.8 in. (402 mm)
Volume: 3.9 gal (15 l) total
Debris Volume: 25 fl. oz. (.74 l)
capacity

Connection

Standard: 2 in. (50 mm) I/O NPTE
thread, 1.5 in. (40 mm) purge
valve NPTI thread
Optional: Flanged (ANSI, DIN), tri-
clamp or BST thread

Process Parameters

Temperature: 400°F (204°C) max.
Flow: 10–60 gpm (40-230 l/min)
Operating pressure: 30–150 psig
(2–10.5 bar)

Media

Wedge wire: 15 μ – 1125 μ , or
defined pore 25 μ – 100 μ
Screen: diameter 7 in. (178 mm),
length 12 in. (305 mm), area
264in² (1,703 cm²)

Elastomer Seals

Standard:

Element and lid: Viton® (400°F
(204°C) maximum),
Shaft seal: urethane (220°F
(105°C) maximum)

Optional:

Element and lid: EPT (300°F
(149°C) maximum), or Teflon®
400°F (204°C) maximum)
Shaft seal: Teflon (400°F
(204°C) maximum)

Cleaning Disc

Standard: Polyethylene (UHMWPE)
(180°F/82°C)
Optional: Teflon (400°F/204°C)
Kynar (285°F/140°C)

Housing/Wetted Parts Materials

Standard: 316 stainless steel, glass
bead blasted

Stand Materials

Standard: painted carbon steel
Options: 304 stainless steel

Controllers

Standard: continuous cleaning
valve (CCV)
Options: push button, semi-automatic
electric, electric timer, single
pneumatic timer, dual pneumatic
timer, PLC minicomputer

Utilities

Electrical: (if equipped with option-
al electric automatic control
timer): 110 or 220 Volt, 50 or
60 Hz,
single-phase.
Air: 60 psig (4 bar) at 5 CFM
(140 m³/m). Air must be clean,
dry, and non-lubricated
Water:


when equipped with
optional FluidSeal: flow rate <1
gpm (3.8 l/min)
when using water (rather than
filtrate) with optional Stealth
Purge: 35 psig (2.4 bar) or less
than filter's inlet pressure

FluidSeal Option

Advanced dual seal design replaces
standard single seal. Available
in Teflon or urethane to suit liq-
uid properties. Also available as
a retrofit kit.

Other Options

Stealth Purge with semi-automatic or
PLC mini computer – water flush
available
Steam jacketed housing
ASME UM code
Electropolish external/internal
Polished internal surface finish
1/4in. (6.4 mm) NPTI gauge ports
Multiplex configuration

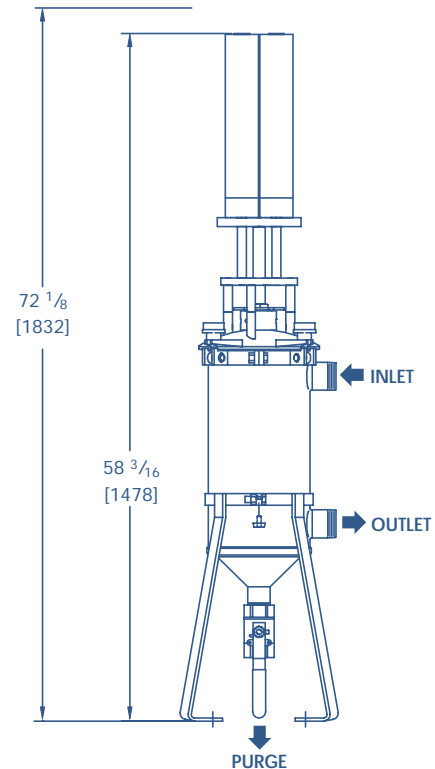

RPA Process Technologies
9151 Shaver Road
P.O. Box 188
Portage, Michigan 49081-0188 USA
Toll Free: 800-656-3344 (North America only)
Phone: +1 616-323-1313
Fax: +1 616-323-0065
E-mail: info@RPAprocess.com
Web: www.RPAprocess.com

RPA Process Technologies SAS
Immeuble Colisée Défense
50-64 avenue François Arago
F-92022 Nanterre Cedex France
Phone: +33 (0)1 56 83 83 00
Fax: +33 (0)1 56 83 83 01

RPA Process Technologies reserves the right to change
specifications without prior notice.

DCF is a registered trademark and FluidSeal is a
trademark of RPA Process Technologies. All other
trademarks are the properties of their respective owners.

©2002 RPA Process Technologies
RPA-DCF800TSS
PWB RPF-140 02/02 4M
Litho in U.S.A.



RPA Process Technologies

Ronningen-Petter • Aoustin • Filtres Philippe • Filtres Vernay • Malaxeurs Guittard