




INSTALLATION MANUAL

Paper Tray Lock System

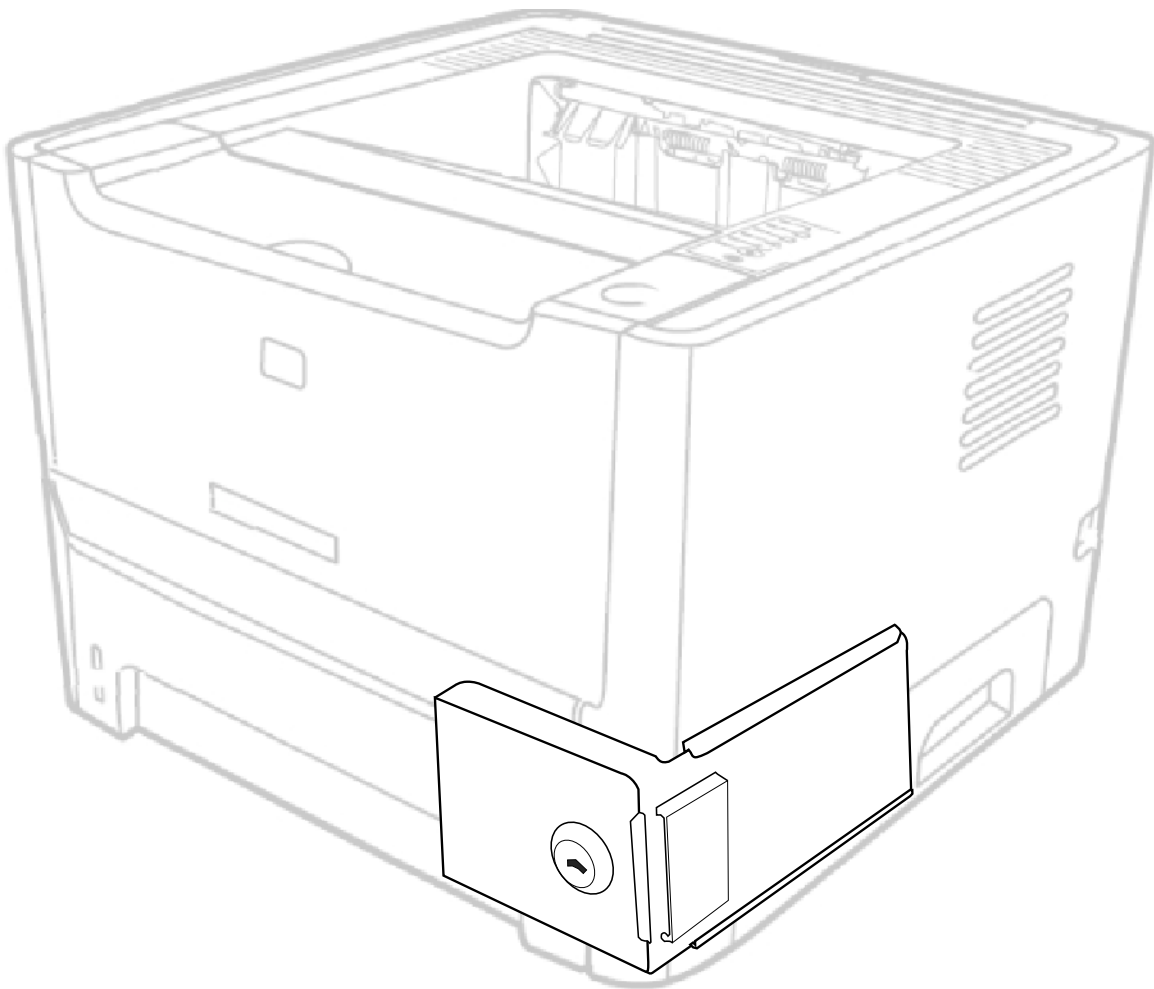

Lucas Distribution, LLC
PO Box 1754
Loganville, Georgia 30052-1754



Table of Contents

Contact Lucas Distribution, LLC	3
Parts List	4
Installation	5 & 6
Installation for Uneven Surfaces.....	7

Lucas Distribution, LLC

"Your Security Partner"

Contact Information

Customer Service - (866) 232-4233

Technical Support - sales@papertraylock.com


Website - www.papertraylock.com

If calling from outside the U.S. please dial 770-554-3560

Paper Tray Lock System



Parts List

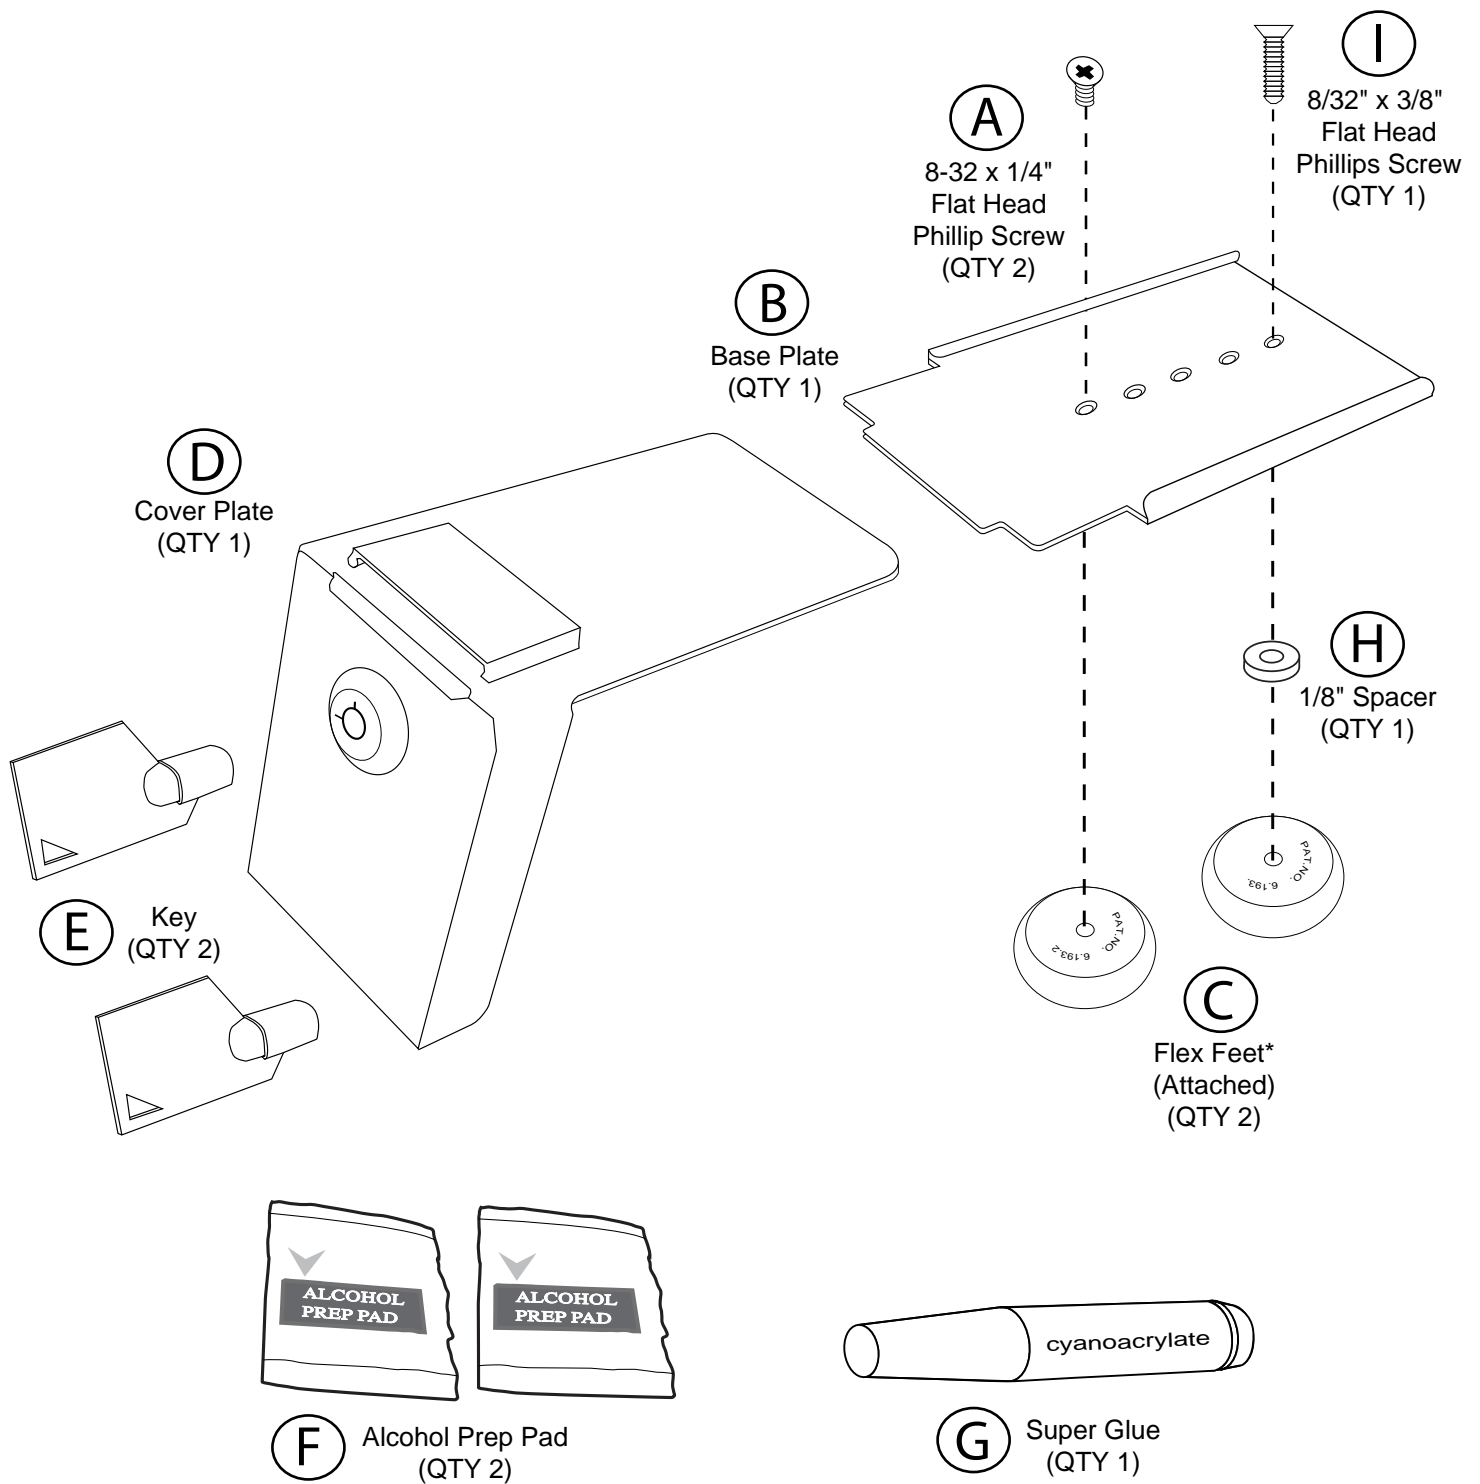

INSTALLATION

***We highly recommend you visit
our website at www.papertraylock.com
and watch our short installation video***

1. Place the Paper Tray Lock (PTL) in various positions on the printer to determine the best area for installation. Check that the Flex Feet lie flat against the surface and do not block any openings, vents or moving parts. (Figure 1)
2. If the base plate does not lie flat and make full contact with the mounting surface refer to instructions on page 7.
3. Once placement is determined, with a pencil trace around the PTL to mark the installation area. (Figure 2)
4. Using the provided alcohol swabs (F), **thoroughly** clean inside the marked area on the printer as well as the Flex Feet (C) located on the base plate (B) making sure that NO dust or debris remain. **It is very important that the bonding surfaces be completely cleaned and air dried in order to achieve the best possible bond. (Figure 3)
5. Position the PTL so the Flex Feet on the base plate are facing up. Open the container of glue (G) and place 7-8 drops of glue on each flex foot. Make sure to place drops of glue around the perimeter of each flex foot as well as in the middle of each flex foot. (Figure 4)

Figure 1

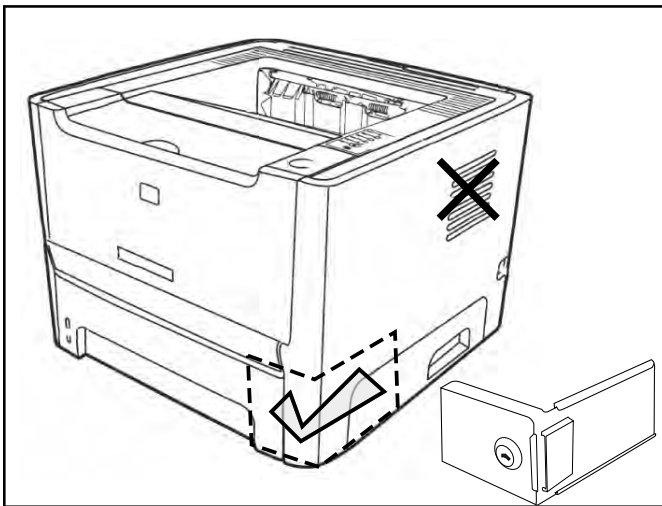


Figure 2

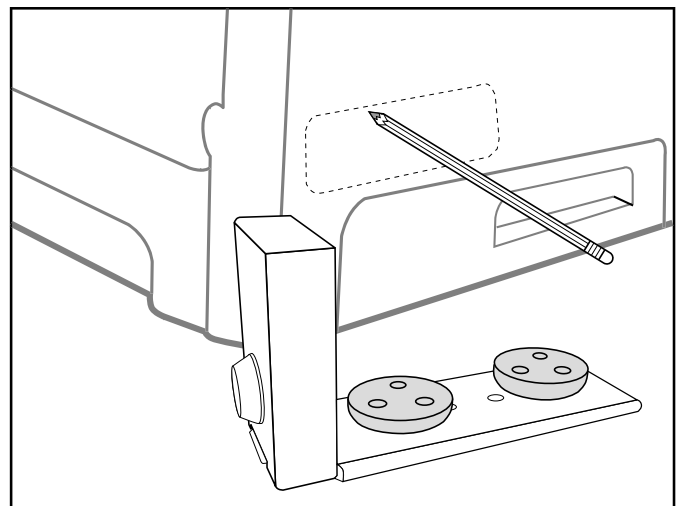


Figure 3


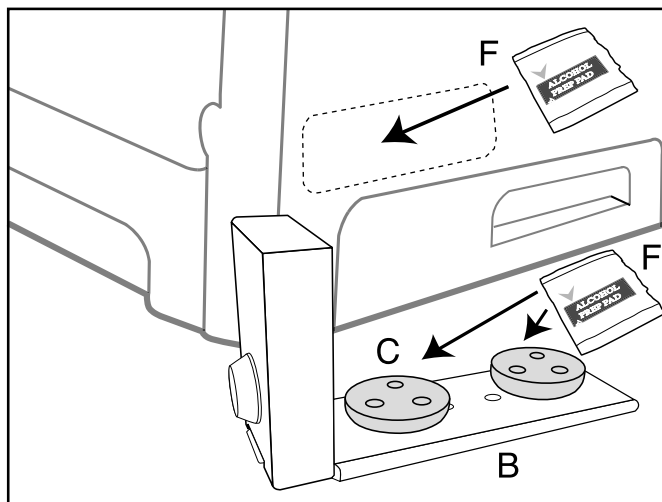


Figure 4

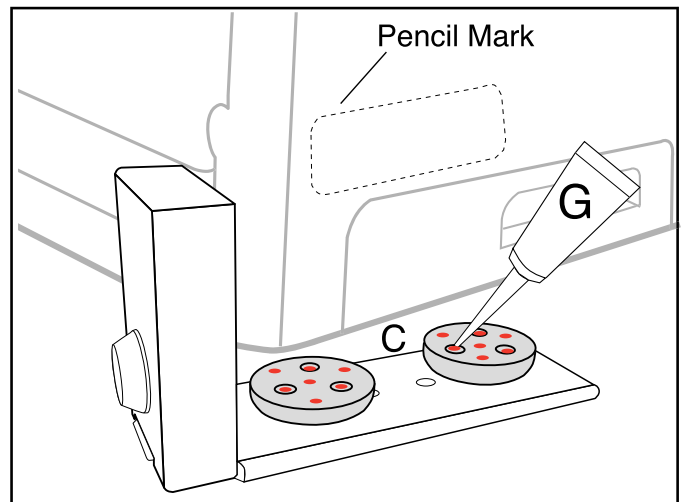

INSTALLATION

6. Quickly and carefully place the PTL in the marked area and firmly apply pressure from the center out for **NO LESS THAN 100 seconds** (it is recommended that you count out loud to ensure that the proper time has elapsed) making sure that no air enters the bonded area. ****It is important that no air enters the area otherwise the bond will be compromised over time.** (Figure 5) (Wipe any glue that may have seeped out from the flex feet)
7. Once you've counted to 100, **while continuing to hold the Base Plate (B)**, unlock and carefully remove the Cover Plate (D) from the Base Plate (B) and allow the glue to cure for **24 HOURS**. In order to ensure a strong, permanent bond it is important to not place any weight on or touch the Base Plate (B) for 24 hours, until the bond is fully cured. (Figure 6 & 7)
8. Once the bond is cured, slide the Cover Plate (D) onto the Base Plate (B) and turn the key (E) to lock. (Figure 8)

Figure 5

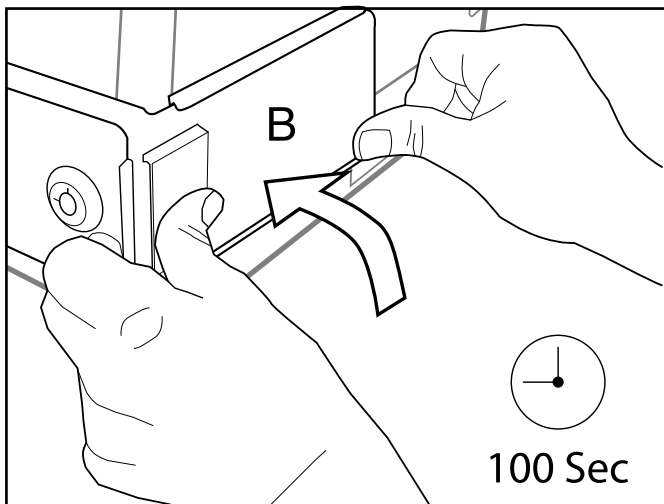


Figure 6

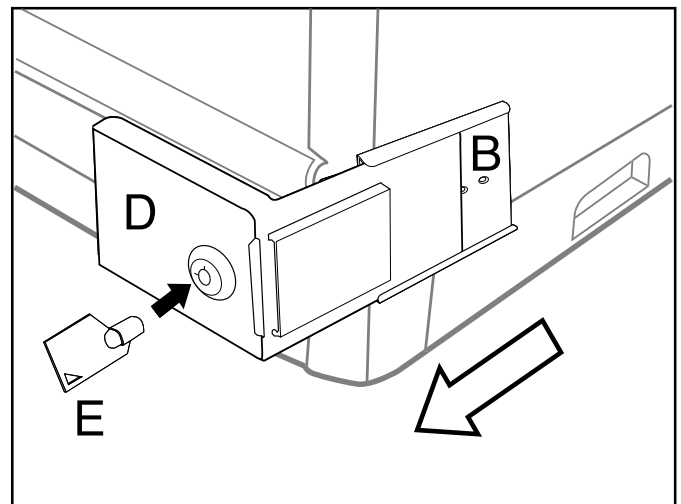


Figure 7


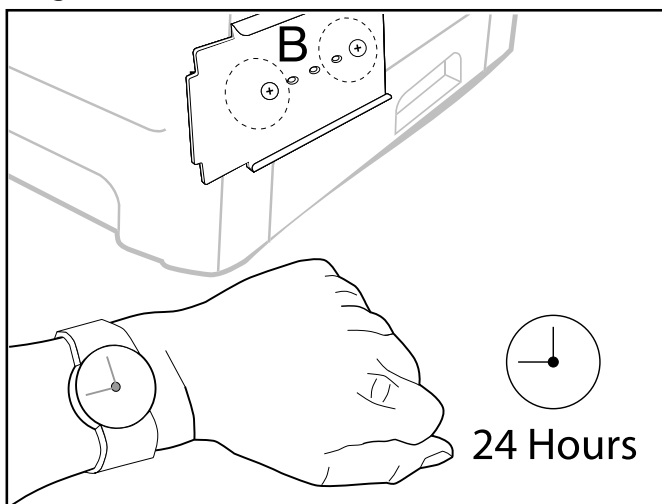


Figure 8

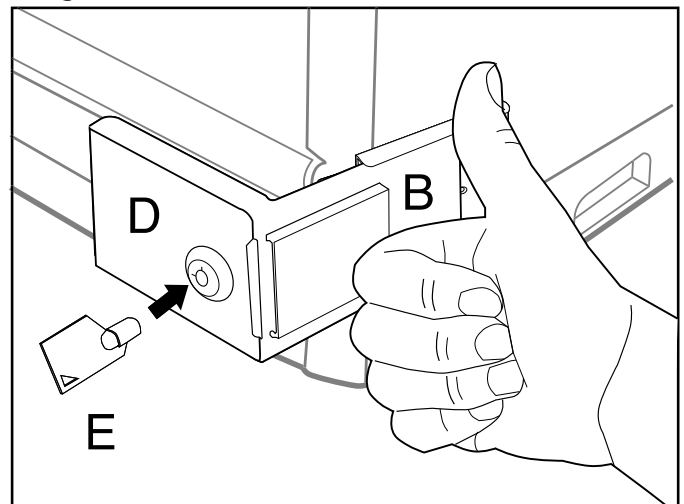

INSTALLATION FOR UNEVEN SURFACES

1. When the PTL must be attached to an uneven surface it is possible that the two Flex Feet (C) will not lie flat against the surface. (Figure 9 & 10)
2. If a Flex Foot (C) is overlapping two uneven surfaces, mark where the Flex Foot (C) must be trimmed and cut off the unnecessary area of the Flex Foot (C). (Figure 11)
3. If no area of the Flex Foot (C) contacts the mounting surface, place a spacer (H) in between the Base Plate (B) and the Flex Foot (C) and use the Large Screw (I) to secure the Flex Foot (C) to the Base Plate (B) (this can be used in any hole). (Figure 12)
4. Once you have made the necessary changes to the Flex Feet (C) assemble and lock the PTL, place in position on the printer and confirm the Flex Feet lie flat against the surface of the printer. (Figure 13 & 14)
5. After the position has been confirmed continue with Step 3 on page 5 for the rest of the installation.

* NOTE: Spacer can be used on either front or back Flex Foot depending on your need.

** NOTE: Flex Feet will adhere to curved surfaces as long as proper pressure is applied.

Figure 9

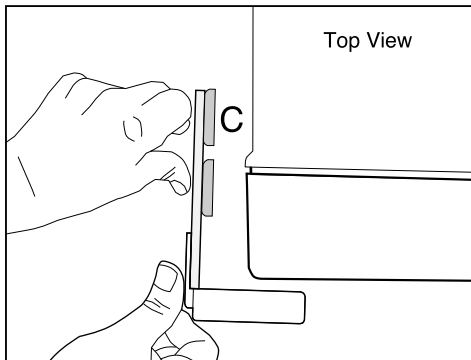


Figure 10

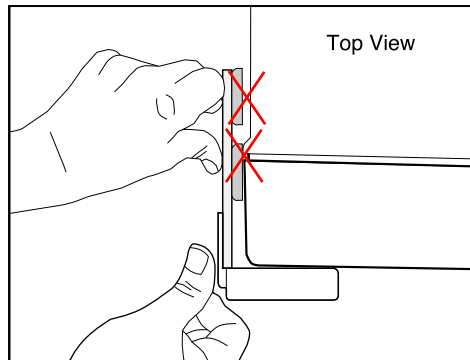


Figure 11

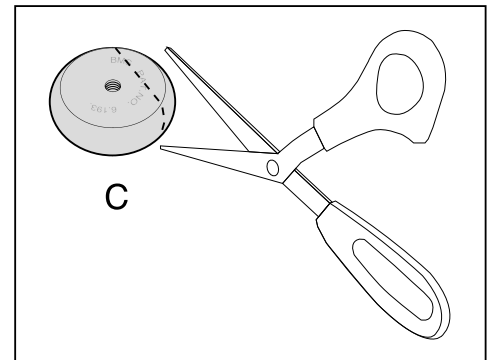


Figure 12

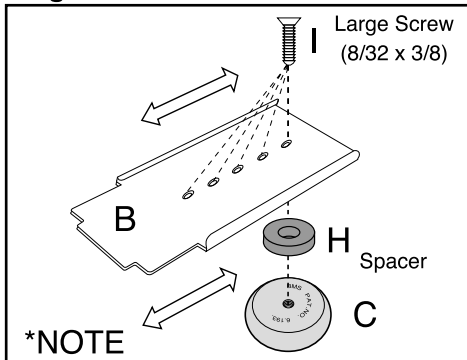


Figure 13

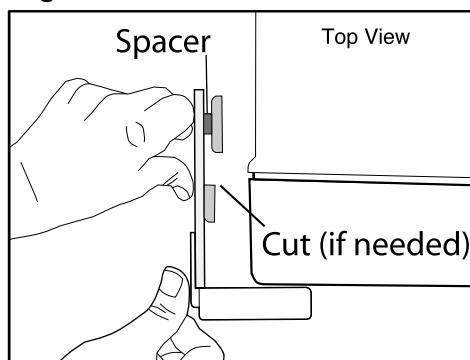


Figure 14

