


DESCRIPTION

The **CBS ArcSafe® RSA-164J** remote switch actuator (RSA) is designed to operate the Square D PowerPact, P-Frame 250-1200 A, manually operated molded case circuit breaker without having to make any modifications to existing electrical equipment thanks to CBS ArcSafe's magnetic latching system. The lightweight, portable RSA-164J allows technicians to remotely close or trip the circuit breaker from a safe distance of up to 300 feet while remaining stationed outside the arc-flash boundary. Typical applications include metering, monitoring, and protection for motors, transformers, and other large non-linear loads. Designed, manufactured, and assembled in the USA, all RSA units are portable, fast, and easy to set up, offer mechanical and/or electrical safety protection, are adjustable to fit unique electrical equipment configurations, reduce the requirements for personal protection equipment (PPE), and help customers with NFPA 70E arc-flash safety compliance. Optional features include radio remote with range up to 300 feet, 24 V DC LED light, wireless video camera system with LCD monitor, and rugged protective case assembly.

SPECIFICATIONS

WEIGHT:	14 lbs
DIMENSIONS:	17" H X 6.2" W X 5.25" D
POWER CONSUMPTION:	84 W
OPERATING DISTANCE:	25-300 feet
COMPATIBILITY:	Square D PowerPact, P-Frame 250-1200 A, molded case circuit breakers; (includes manually operated PG, PJ, PK, & PL)
CONTROL/POWER SOURCE:	CBS ArcSafe® RSO-IAR control console

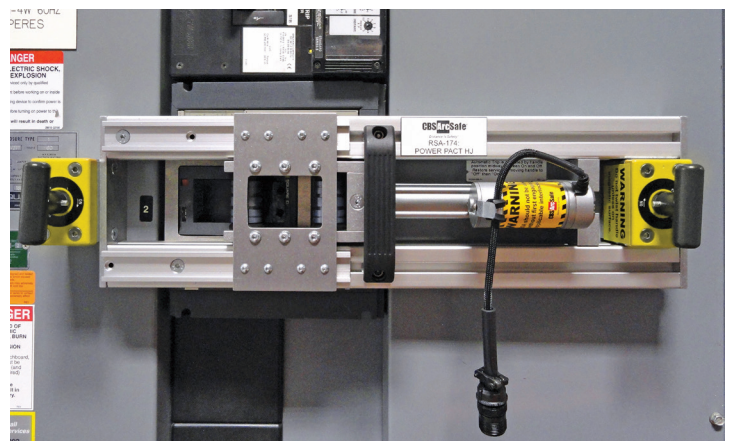

OVERVIEW

- Remote operation from up to 300 feet
- Lightweight, portable, and adjustable
- Simple setup; no equipment modification required
- Reduces or eliminates need for arc-flash hazard suits
- Designed, manufactured, and assembled in the USA

