

## RSA-154C


Siemens Vacu-Break® V2F & V7F Series  
Single- or twin-mounted 200 A switch

### DESCRIPTION

The **CBS ArcSafe® RSA-154C** remote switch actuator (RSA) is designed to operate the Siemens Vacu-Break® fusible panel units without having to modify existing electrical equipment thanks to CBS ArcSafe's magnetic latching system. The lightweight, portable RSA-154C allows technicians to remotely close or trip a Siemens panelboard switch (PBS) from a safe distance of up to 300 feet while remaining stationed outside the arc-flash boundary. The RSA-154C is compatible with Siemens V2F and V7F series of single- or twin-mounted 200 A switches with a height of 10 inches. Typical applications include small-percent motor loads, motor starting circuits, and feeder circuits with less than 10 kA available fault current. Designed, manufactured, and assembled in the United States, all RSA units are portable, fast, and easy to set up; offer mechanical and/or electrical safety protection; are adjustable to fit unique electrical equipment configurations; reduce the requirements for personal protection equipment; and meet NFPA 70E arc-flash safety compliance standards. Optional features include radio remote with range of up to 300 feet, 24 V DC LED light, wireless video camera system with LCD monitor, and rugged protective case assembly.

### SPECIFICATIONS

WEIGHT:	16 lbs
DIMENSIONS:	8.75" D X 10" W X 11" L
POWER CONSUMPTION:	50 W
OPERATING DISTANCE:	25–300 ft.
COMPATIBILITY:	Siemens V2F and V7F Series of single- or twin-mounted 200 A switches
CONTROL/POWER SOURCE:	CBS ArcSafe® RSO-I control console

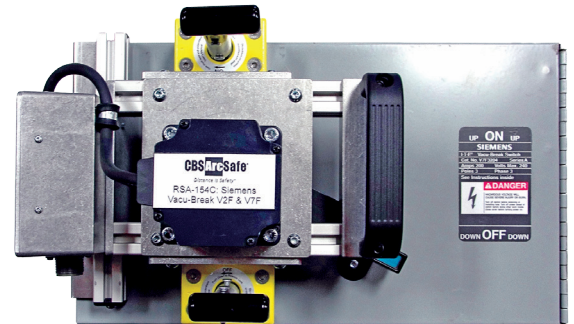

### OVERVIEW

- Remote operation from up to 300 feet away
- Lightweight and portable for hard-to-access areas
- Simple setup, no equipment modification required
- Reduces or eliminates need for arc-flash hazard suits
- Designed, manufactured, and assembled in the USA

