


LELA Leading Edge Label Applicator

Labeling Simplicity at Its Best...

Compact, Low-Cost, Easy-to-Use, Patent-Pending Labeler Driven by a Brushless DC Servo Motor!

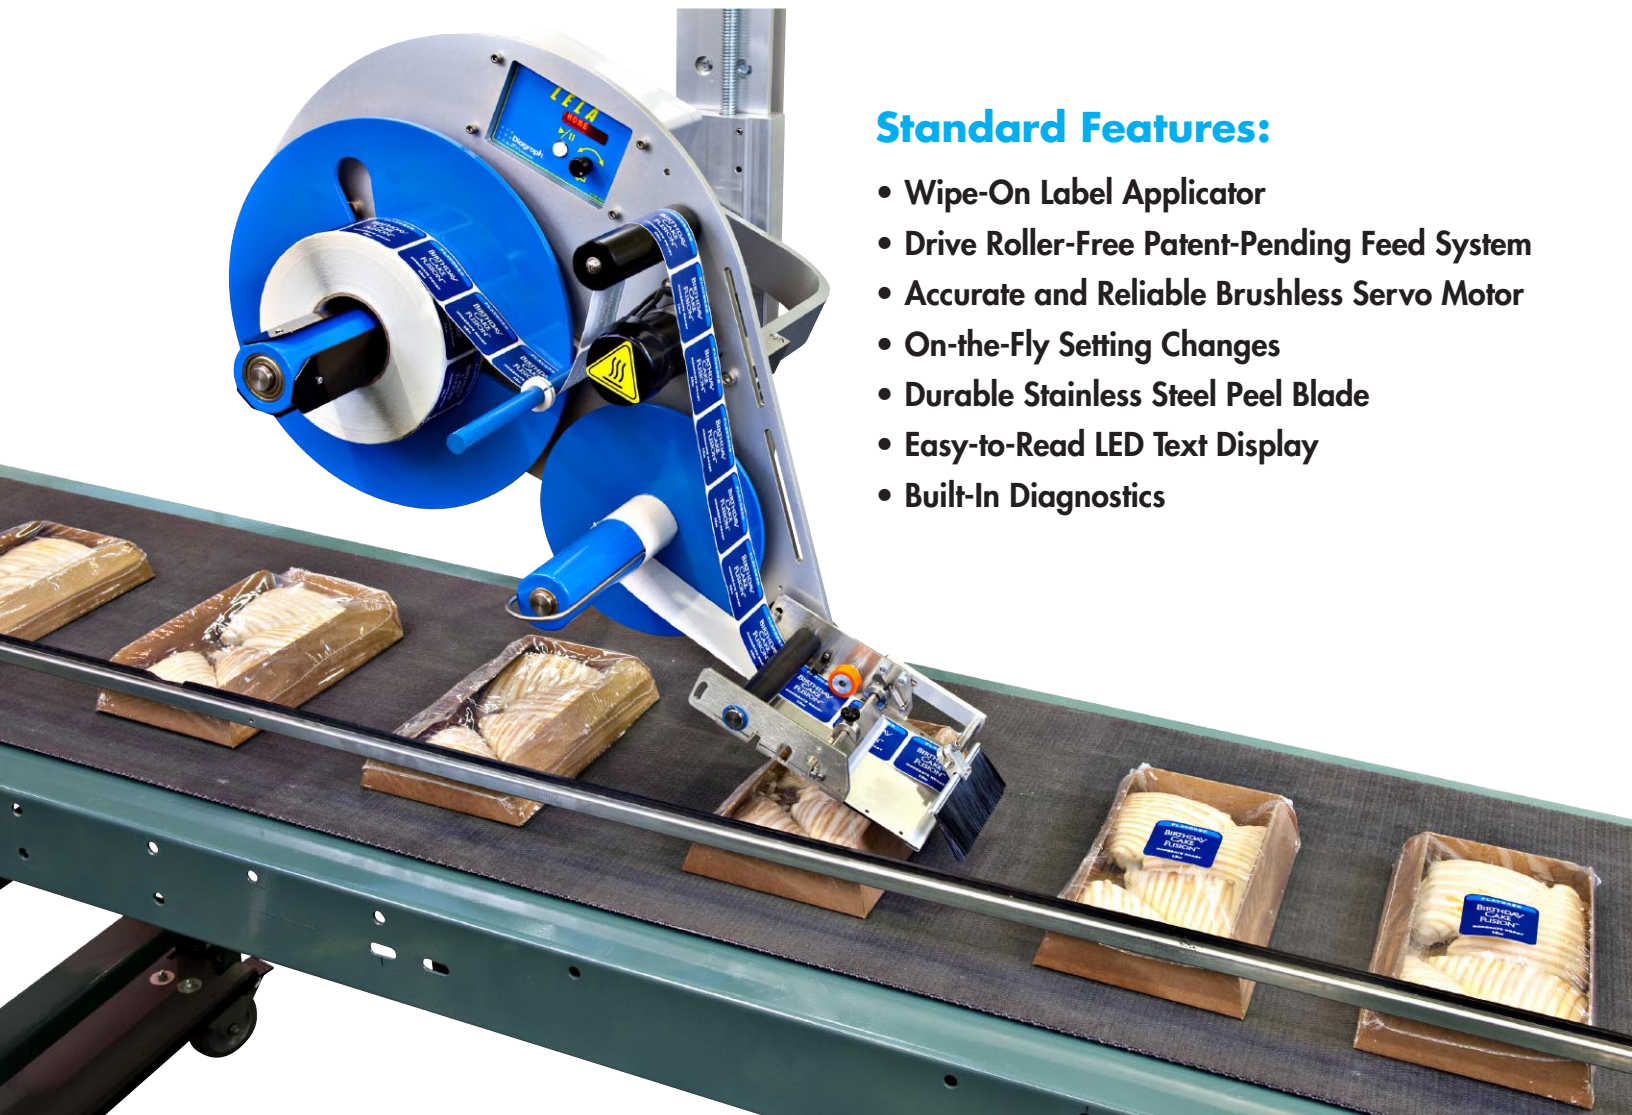

Standard Features:

- Wipe-On Label Applicator
- Drive Roller-Free Patent-Pending Feed System
- Accurate and Reliable Brushless Servo Motor
- On-the-Fly Setting Changes
- Durable Stainless Steel Peel Blade
- Easy-to-Read LED Text Display
- Built-In Diagnostics



LELA can be oriented for top, side or bottom labeling



Control Module makes adjustments quickly with a rotary shuttle control



Servo-controlled label dispensing ensures wrinkle-free application

Labeler

Max. Line Speed	80 fpm (41 cm/s)
Min. Line Speed	10 fpm (5 cm/s)
Max. Label Width	4" (10.1 cm)
Min. Label Width	0.75" (19 mm)
Max. Label Length	8" (20.3 cm)
Min. Label Length	0.75" (19 mm)
Accuracy	± 0.0625" (± 1.58 mm)
Supply Roll OD	14" (35.5 cm)
Supply Roll Capacity	14" (355.6 mm)


Electrical

AC Voltage Supply	Nominal: 100 - 240 VAC, 1.6 A, 50/60 Hz Minimum: 90 VAC, 47 Hz Maximum: 264 VAC, 63 Hz
Product Detector	Nominal: low 0-3 VDC; high 3-5 VDC Minimum: 0 VDC Maximum: 24 VDC
Product Detector Pulse Width	Nominal 10 mS; Minimum 1 mS; Maximum infinite
Warning Tower	Nominal: 0 and 24 VDC, 1 Amp sinking Minimum: 0 VDC, 0 mA Maximum: 24 VDC, 1.5 Amps sinking


General

Temperature	41° to 104° F (5° to 40° C)
Humidity	10 to 85% RH, non-condensing
Dimensions (with yoke)	32" L x 23" D x 19" H (812.8 mm x 584.2 mm x 482.6 cm)
Weight	38 lbs. (17.3 kg) (includes yoke, not stand)
Certifications	CE, CSA, FCC Approved, Listed (UL 60950)

Top View

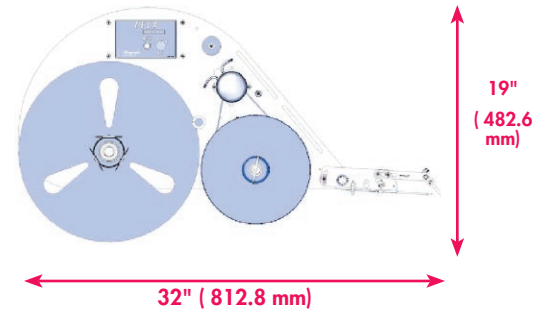

Side View

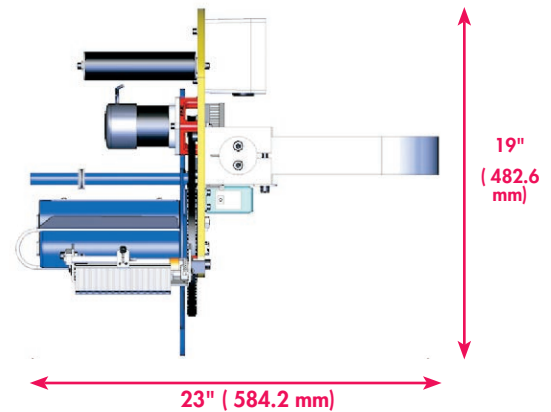

Overhead View

