

ROTO-MAX



***The Ultimate in
Ergonomic Work Positioners***

LIFT PRODUCTS, INC.



Lift Products, Inc.

PO Box 349

Elm Grove, Wisconsin 53122-0349

262-860-1895 • FAX 262-860-1894

Toll Free 877-LIFTPRO (877-543-8776)

www.liftproducts.com

Innovations in Ergonomics

ROTO-MAX IS ERGONOMICALLY DESIGNED FOR THE OPERATOR.

Roto-Max was designed from the ground up with the operator in mind. The Roto-Max electric hydraulic work positioner places the load at the ideal height for the individual by allowing the operator to determine where he or she would like the work load positioned.

It doesn't matter how short or tall the individual is since the operator determines the most comfortable working height. The Roto-Max allows complete flexibility to do the ergonomically safest job with maximum efficiency.

Whether the load is one pound or 3,500 pounds, the positioner height does not change until the individual wants it to change.

With a lowered height of only 6.5", an operator has easy access to the top layer of product. The raised height of 32.5" (plus pallet height) is ideally suited for most applications.

The 43" diameter top rotates easily, thus giving the operator access to product without having to stretch or walk around. An optional powered rotating top is also available.

Models RTMX-30 and RTMX-25HS have high performance electric 1 1/2 hp motors and run on a standard 20 amp 115 volt single phase circuit.

The RTMX-35 has a high performance electric 2 hp motor with a 230 single phase or 230/460 3 phase voltage as standard.

A magnetic backed control box is standard and a foot control switch is available as an optional item.



ROTO-MAX SPECIFICATIONS:

Model No.	Capacity lbs.	Lift Speed	Shipping Weight lbs.
RTMX-25HS	2,500	10 sec.	680
RTMX-30	3,000	14 sec.	680
RTMX-35	3,500	19 sec.	700

Common Dimensions

Lowered Height:	6.5"
Raised Height:	32.5"
Turntable:	43" Diameter, 360 Degree rotating
Base Frame:	30" x 45"

Specifications:

- Cylinders with internal stops, hard chrome plated, polished shafting hydraulic cylinder piston rods
- Surfaces degreased, descaled and finished with safety yellow and blue enamel
- Control box NEMA constant pressure, magnetic backed.

- 10 foot power cord (Connector not included)
- Smooth steel top with yellow and black safety stripes
- S.A.E. hoses and fittings
- Integral safety restraint maintenance bars.
- Internal gear pump with check valve, relief valve, solenoid valve
- Includes hydraulic oil and filter


Options Available:

- Foot control switch
 - Accordion skirting
 - Two casters and dolly handle
 - Square or rectangle top
 - Powered rotating top
 - Fork pockets
 - Rotation brake
- Consult the factory for other special requirements.

Specifications subject to change without notice.

Lift Products Inc., products are covered by patents pending or other rights reserved.

ROTO-MAX FEATURES

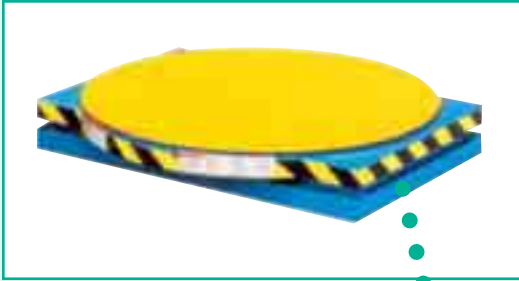


Only 6.5" lowered height including rotating top.



Optional semi-live wheels and dolly jack.


Raised height of 32.5"

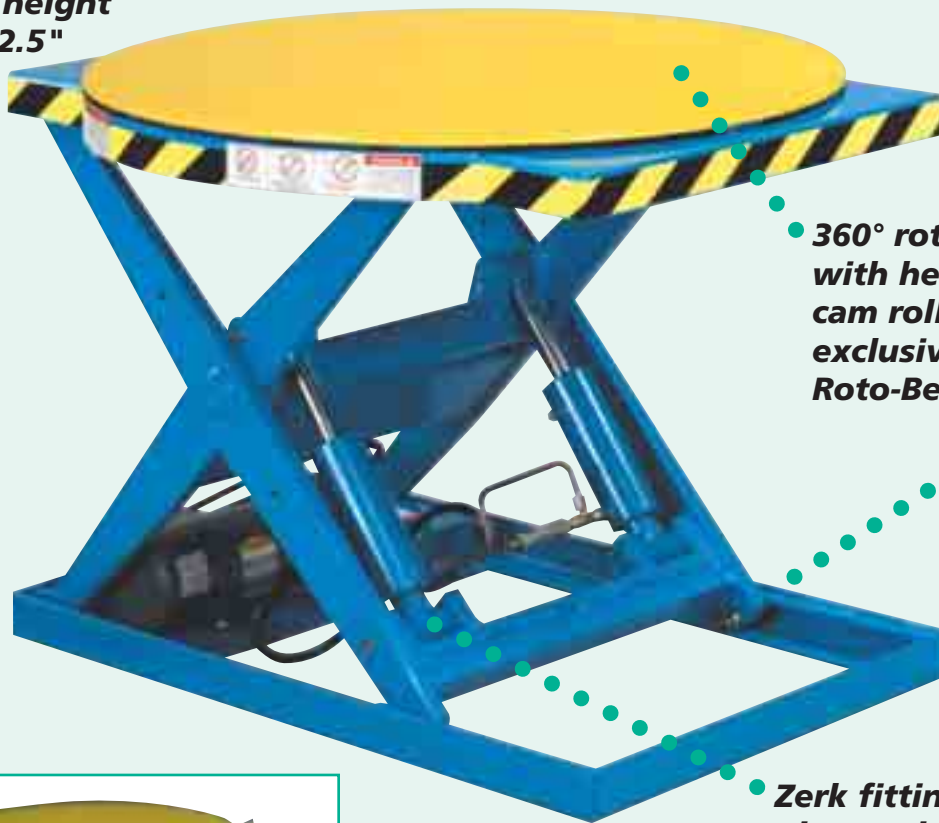

360° rotating top with heavy duty cam rollers and exclusive Roto-Bearings.

Trapped top and bottom scissor arms.

Zerk fittings on pivot points.

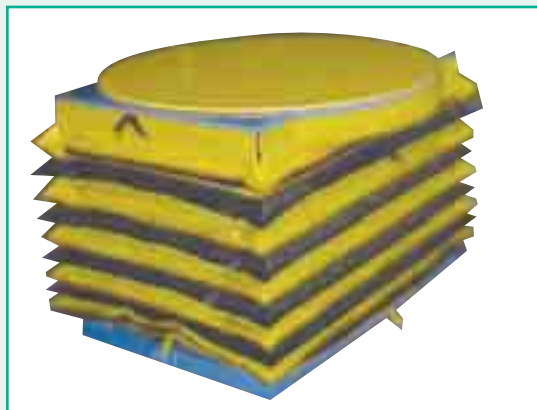

Optional Accordion Safety Skirting

Magnetic control box or optional foot control allows operator to place load height to their individual needs.

