



Mine Blasting Cable

12 AWG/2 Conductor

TPC
NEW
PRODUCTS

- 600 Volt
- FT-2, FT-4
- Oil/Sun Resistant
- -40° C to +90° C
- Type TC
- SOOW

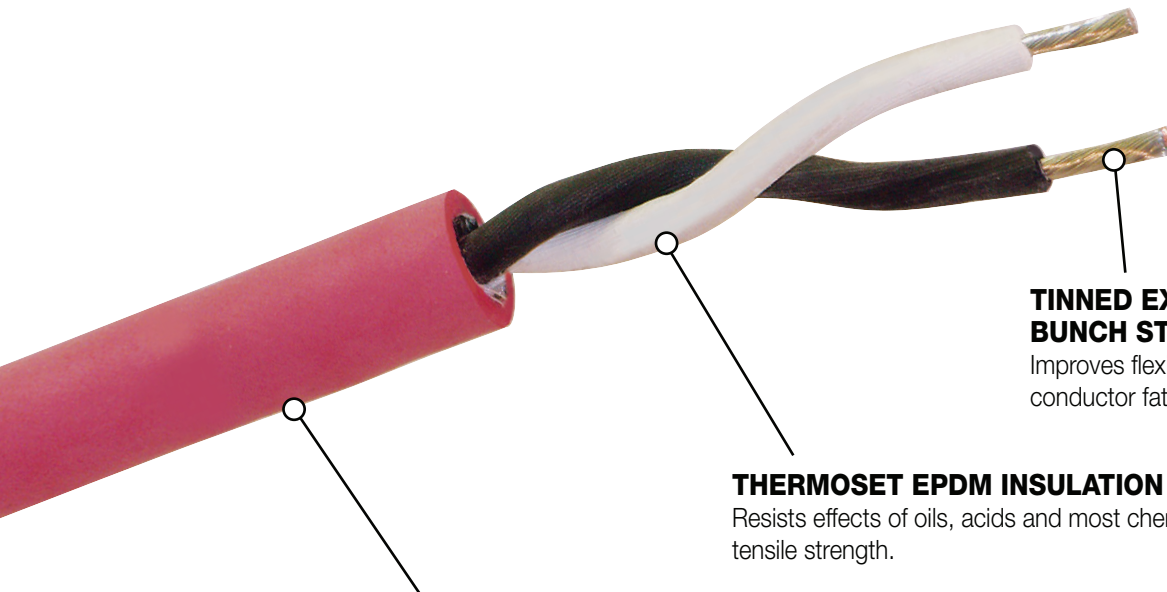

HIGH VISIBILITY PINK TSE JACKET

Superior resistance against tearing, abrasion, impact, oil, ozone and most chemicals. Extreme all weather flexibility.

THERMOSET EPDM INSULATION

Resists effects of oils, acids and most chemicals. Superior tensile strength.

TINNED EXTRA FLEX #34 AWG BUNCH STRANDED COPPER

Improves flexibility and reduces conductor fatigue and breakage.

APPLICATIONS

- Blasting cable for mining
- Portable cord for industrial environments
- Indoor/outdoor extension cords

APPROVALS

- UL Listed
- CSA Certified

ORDERING INFORMATION

PART NO.	SIZE AWG/COND.	CONDUCTOR STRANDING	AMPACITY (1)	INSULATION THICKNESS (IN.)	JACKET THICKNESS (IN.)	NOMINAL O.D. (IN.)
96709	12/2	168/34	25	0.045	0.08	0.58

NOTES: (1) Maximum allowable current per conductor based on ambient temperature of 30° C, per NEC Table 400.5(A)



TPC WIRE & CABLE CORP.

A Premier Farnell Company

7061 E. PLEASANT VALLEY RD.
INDEPENDENCE, OHIO 44131

800-521-7935 FAX 216-525-4392
CANADA 800-545-0122 MEXICO 800-290-5614
www.tpcwire.com

WARRANTY AND DISCLAIMER: Seller makes no warranties, express or implied, with respect to this product, and seller disclaims any implied warranties of merchantability or fitness for any particular purpose. Further, seller will not be responsible for any consequential, incidental or indirect damages (including, but not limited to, any loss of profit) from any cause whatsoever.

TPC1012 (7/10) PRINTED IN U.S.A. All rights reserved. No portion of this publication, whether in whole or in part, can be reproduced without the express written consent of Premier Farnell, LLC ©Copyright 2010 by Premier Farnell, LLC ®Registered Trademark of Premier Farnell, LLC ™Trademark of Premier Farnell, LLC

Innovation at work