technical specification ▶▶▶

boom specification

▶ working height with 120kg (1 person) 13.9m (45ft 6")

with 200kg (2 persons)12.3m (40ft 4")


▶ outreach limit with 120kg (1 person) 6.7m (21ft 11")

with 200kg (2 persons) 5.4m (17ft 8")

▶ load capacity 120-200kg (264-440lbs) (1-2 persons)

▶ 360 degree boom rotation

► Hatz diesel power unit

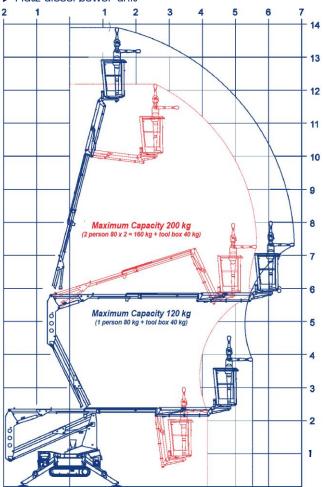

NT-14 >>>

Self-Drive Access



Boom Stowed Dimensions:


▶ height 2.07m [6ft 9"]▶ length 4.02m [13ft 2"]

► width 1.48m [4ft 10"] (with basket)

0.84m (2ft 9") (basked removed)

Standard Features Include:

- ► 1400kg machine kerb weight, comparable to a small hatch-back car
- ► Wander-lead remote control box for driving and positioning
- ► Auto-level stabilisation and destabilisation
- ► Bi-fuel: diesel and mains electric
- ➤ 20% gradability for tracking into position on rough terrain
- ► Pin-point turning circle
- ► Smooth electronic controls with creep speed ability

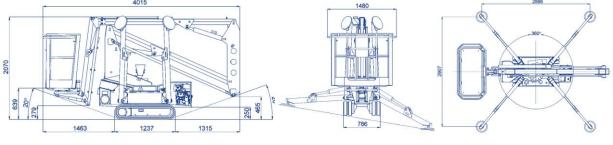

All specs serve as a guideline only and are correct at time of going to print. Smart reserves the right to change the specification without any prior notice

boom carrier vehicle (optional)

- ▶ Citroen Relay 2.2 litre diesel
- ▶ vehicle height 2.20m (7ft 3")
- ▶ vehicle width 2.30m (7ft 7")
- ▶ vehicle length 6.60m (21ft 10")
- ▶ travelling height with platform 2.70m (8ft 11")
- ▶ 3500kg GVW





tel: 0871 871 92 92 fax: 0871 871 93 93 www.**smart**platforms.co.uk