






Refrigerator Lock Installation Guide

*NOTE: Will only work on refrigerators with doors 1-3/4" or less thick. Typically small, compact refrigerators. If your refrigerator door is thicker than 1-3/4" please use the FFPTL lock.



- ① The Refrigerator lock consists of two pieces - the base plate and the cover plate. The cover plate should be locked to the base plate during installation. (Lock will be assembled when you receive it.)

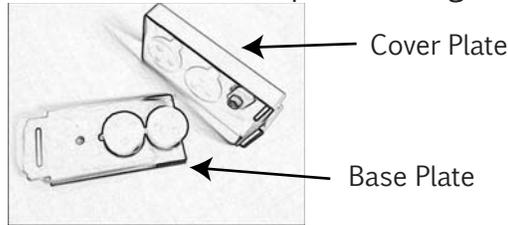

- ② Place the Refrigerator Lock in various locations to determine the best fit on your model refrigerator. Ensure base plate flex feet do not extend past refrigerator body onto refrigerator door. Once a suitable location has been determined use a pencil and lightly trace the outline of the cover plate and base plate on the refrigerator. Using the provided alcohol wipes, thoroughly clean the surface of the refrigerator as well as the flex feet. Make sure all bonding surfaces are completely clean and allow to air dry in order to achieve the best possible bond.

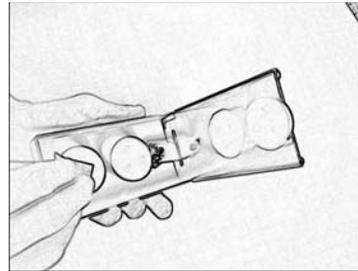

- ③ Put the Refrigerator Lock in the "locked" position. Using the provided glue, place one drop on each of the three embossed circles located on each flex foot. Carefully place the lock in the marked area and apply firm pressure for 100 seconds. It is very important you apply pressure for 100 seconds and that no air enters between the flex feet and refrigerator at that time.

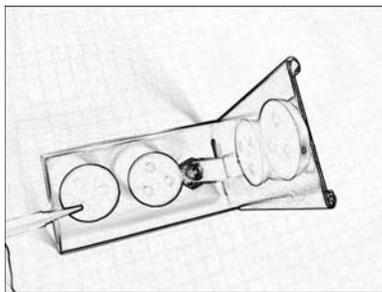

- ④ Once you count to 100 carefully unlock the refrigerator lock and allow the lock to sit UNTOUCHED for 24 hours.



- ⑤ After 24 hours simply turn the key to lock the Refrigerator Lock - your contents are now secure!