



- ATSC/NTSC/QAM/CV \*input for integrated TV picture-in-picture (\*option)
- 24/7 operation with 3-year hardware warranty
- Wall-mount design includes mounting tabs for out of sight installation
- Includes NOAA Internet weather for auto-updating of local conditions
- Built-in support for broadcast smooth tickers (crawls)
- Built-in support for reading and displaying RSS feeds in ticker
- Built-in support for time, temperature and date
- Built-in support for MPEG 1-4 WMV, H.264, VOB, PPT, AVI (1), MOV
- Built-in support for animated GIF and Flash objects
- Built-in support for HTML page capture
- Built-in support for common graphic formats: JPG, BMP, PNG, GIF, TIF
- Built-in support for common audio formats: stereo analog, WAV, MP3, WMA
- Includes professional MediaZone Pro media manager program
- Includes Playlog software for logging time/date stamps on media schedules
- InfoZone Pro Server compatible for enterprise level media management

## Digital Signage Media Player with RGBH/V / HDMI Outputs and MediaZone Pro Software

The optimized MediaZone Pro system excels at delivering everything you need in a digital signage turnkey package. The system comes preloaded with software and tested at the factory, so you don't have to take up precious time and resources loading software and working through inevitable snags. Combined with a display, you'll have all you need to create a digital signage channel that advertises, alerts, entertains and informs your viewers with dynamic and up-to-date information.


By minimizing extensive configuring and time-wasting setup, our MediaZone system adds considerable value over buying an off-the-shelf computer that may or may not perform well. But with the Keywest-configured MICRO player, you can be assured that your digital signage playlist will play smoothly and reliably for many years to come right out of the box.

Our MICRO wall-mount system is provided in a specialized chassis that performs well under the extreme demands of digital signage applications. The wall-mount system includes RS-232. Interactive, WiFi, streaming video and Digital TV input are available as options.

Every system includes our Windows 7 compatible digital signage software—MediaZone Editor Pro—it supports a wide variety of media files for scheduled playback of playlists.

And fortunately, building your media playlist is quick and easy with our intuitive user interface. Simply import media assets from the clipboard and place them into the user-configurable template. Media assets can be configured to run full-screen or in a "zone," giving you the look and feel that works best for your application.

MediaZone Pro raises the bar when it comes to delivering optimal results that will impress your patrons. With over 10 years of continual innovation and field use, it is a proven champion that satisfies the most demanding digital signage requirements—all this at a price that makes it an exceptional value.





### Digital Signage Player & Software

Order Part # MXS-MICRO-MZP

Add these popular options:



### Interactive-3 Software

Add Part # MXS-MICRO/I3MZP

Note: Requires touch screen (not included)



### Video & Digital TV Tuner Input

Add Part # MXS-MICRO/CT

Note: Uses one USB port



### WiFi Network Adapter

Add Part # MXS-MICRO/WI



Note: Uses one USB port



### Streaming Video Input

Add Part # MXS-MICRO/ST

Note: Supports RTP, RTSP, UDP

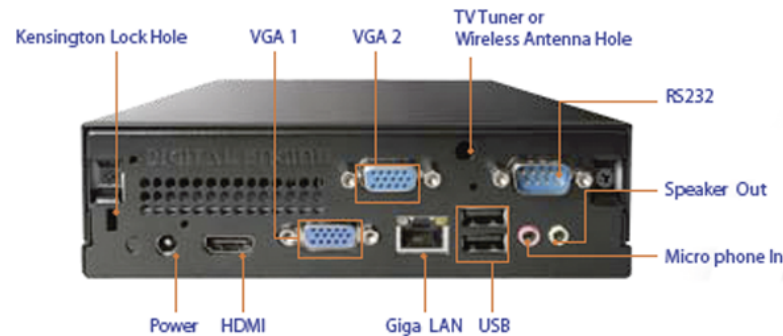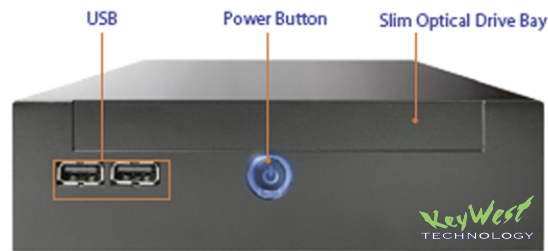

### MECHANICAL

DIMENSIONS: Wall Mount Chassis

2.0 (H) x 6.5 (D) x 6.5 (W) inches (50 x 165 x 165 mm)

WEIGHT (actual): 2.7 lbs. (1.22 Kg)

### I/O SPECIFICATIONS

- (2) VGA Output to QXGA & 16:9/9:16 rotation
- (1) HDMI Output (1080P)
- (1) CV & Digital TV Turner Input (option)
- (4) USB v2.0 I/O
- (1) Stereo Audio I/O, 3.5mm
- (1) RS-232 via 9D
- (1) RJ45 LAN 10/100/1000 Base-T Ethernet

### MINIMUM SOFTWARE REQUIREMENTS

MEDIAZONE PRO SOFTWARE (included)

- Windows® XP-Pro/ Vista™/ 7 OS
- Intel® Atom™ 1.8GHz CPU (dual-core)
- 256MB onboard video memory
- 1GB RAM (2GB Vista or 7)
- Direct-X 9.0

### ENVIRONMENTAL

- Operating Temperature: 32 ~ 122°F (0-50°C)
- Storage Temp: -22 ~ 140°F (-30°C to 60°C)
- Humidity: 95% max non-condensing

### DATA STORAGE:

- 250GB HDD Standard

### POWER

- PSU: 100/240 VAC, 47-63 Hz 55W (UL/CE)

Specifications subject to improve without notice



Download  
MediaZone Pro  
Software  
Brochure!

Request a web demo today!



CC # 250811

Copyright © 2011 Keywest Technology, Inc. All Rights Reserved

14563 W 96<sup>th</sup> Terrace • Lenexa KS 66215 USA • Call 800-331-2019 – Int'l 01-913-492-4666 www.MediaZonePro.com