

Introductory Offer



The **LIFT-N-GO II™** Series lifter has increased capacity over the standard Lift-N-Go™ Series. The **LIFT-N-GO II™** continues the tradition of providing for increased economical, safe, efficient, and ergonomic material handling solutions to assist you with your production needs.

The **LIFT-N-GO II™** has a lift capacity of 90Kg (200-lbs) and provides for improved and expanded flexibility with a wider base and longer legs along with an improved electronic power pack to better fill your ergonomic lifting requirements.

The introductory offering is for the base lifter without end-effectors.

Optional End-Effectors:

- Fixed core probe 14" long
- Platform-UHMW load platform (~20" wide x ~17 1/4" deep)
- Platform with removable "V" block and turntable

Features and Benefits:

- Anodized Aluminum Profiles-
 - Lift Masts
- Steel (Powder Coated Paint-Optional SS)
 - Welded Base
 - Handlebar-height Adjustable
 - Power Pack Cover
- Standard swivel casters
- Standard length lift masts
- Foot operated kick brakes on rear casters
- Lift mast slip clutch on the down movement provides for safe load handling
- Current limiting (no limit switches) provide for load limiting and stops
- Totally enclosed lift mast w/ball screw for smooth up and down DC powered movement
- Electronic power pack utilizes quick exchange features allowing for multi-shift operation
- Detachable remote controller
 - Provides the operator with control over load handling functions.
- Handlebar is adjustable by the operators to achieve ergonomic operation
- Highly maneuverable, light-weight (approximately 90-lbs) and easy to operate.

Introductory Offering:
Base Lifter without End-Effector



Optional End-Effector:
Core Probe-14" Long




Optional End-Effector
Platform

Optional End-Effector:
Platform with Removable
"V" Block and Turntable

LIFT-N-GO II™ HD Series Ergonomic Lifter

Document No. 80084
Rev. 09/11

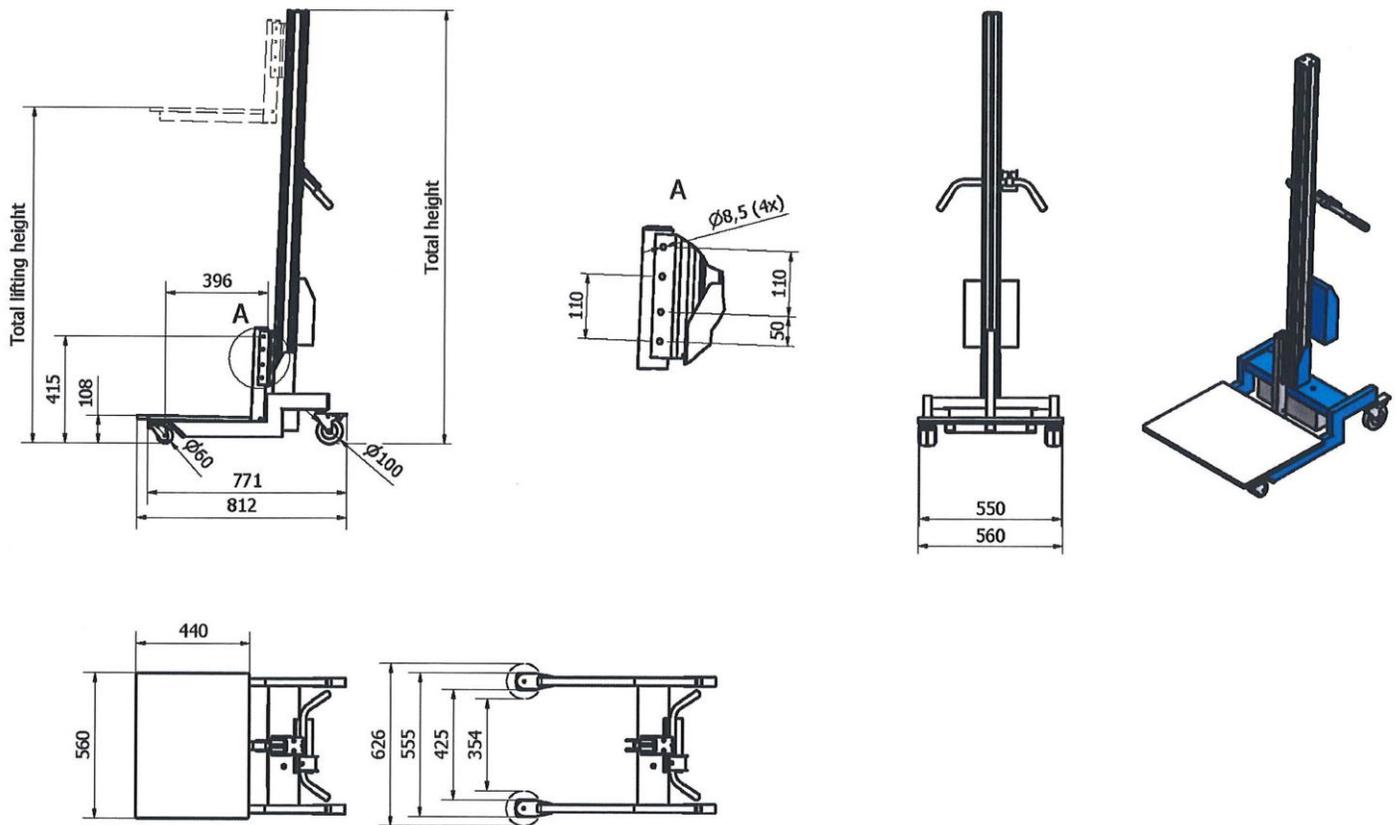

Introductory Offer:

- Base Lifter (sized as noted below) \$2,995.00 each

Optional End-Effectors:

- Fixed Core Probe \$626.00 each
- Platform \$518.00 each
- Platform, “V” Block and Turntable \$790.00

Packaging and freight are not included. Pricing is good through December 31, 2011

Technical Specifications 200 HD Series:				
Lift Stroke	Total Height	Total Lift Height Floor to top of Platform	Series	
1550mm (56.7")	1928mm (76")	1692mm (60.9")	200 HD Series	
Minimum Lift Height Standard	158mm (6.2"), 108mm (4.25")			
Lift Speed 200HD Series	90mm/sec (3.5"/sec)			
Length (w/o Platform)	771mm (30.35")			
Load Platform (Depth x Width)	440mm (17.3") x 560mm (20")			
Wheel Diameter (Front/Back)	60mm (2.3")/100mm (3.9")			
Maximum Load 200 HD Series	90Kg (200-lbs)			
Lifter Weight w/o End-Effector	40Kg (90-lbs)			
Battery Voltage	24V			
Battery Capacity	7.2 AHr			
Lifter Finish	Powder Coated Paint/Anodized			
The load platform can if needed, be mounted 110mm (4.3") higher on the mast yoke. If mounted this way, the platform top when lowered would be higher than the standard mounting height.				

Consult RonI, Inc for other Lift-O-Flex® Solutions