

HD 2600 Product Summary

The HD2600 is Videotel's Industrial HD DVD/CD Stand-alone Digital Content/Signage Player. Our commercial player is designed, built & proven to play continuously 24/7/365 days a week for over 4 years. The HD2600 automatically powers on, auto starts and auto repeats with no manual interaction, even after a power loss. It provides users with a robust feature set that delivers durability and exceptional picture quality. The HD 2600 is ideal for digital content display for any market.



Features & Benefits

- Proven lifetime of 4+ years consistently running 24 hours a day 365 days per year
- Automatically powers up, plays and repeats
- Operates both vertically and horizontally, ideal for confined spaces
- Superior Image Quality with HDMI Output of up to 720 or 1080i resolution
- Customizable Splash displays if Disc is not present – ideal for custom advertising
- Slim and Compact design
- Rear mounted IR jack
- 5 changeable modes
 - Mode 1: Auto plays and repeats the largest title of the disc
 - Mode 2: Auto plays and repeats all titles of the disc in order
 - Mode 3: Standard manual disc operation
 - Mode 4: Auto plays and repeats discs unable to start in mode 1 or 2
 - Mode 5: Auto plays and repeats discs unable to start in mode 1 or 2 or 4
- Minimal heat generation
- Requires only a single outlet
- Includes remote (not required to operate)
- 18 Month Warranty

HD 2600 Specifications

- Reads digital data stored on DVD and CD discs such as DVD-Video, DVD-R/RW, DVD+R/RW, Video CD, SVCD (Super Audio CD), CD-R/RW, CD-Audio, JPEG, MP3
- Compact industrial case, only 7 3/8" wide x 9" deep x 2" tall
- Operating temperature range -20°C to 70°C
- Supports Video Display Output (NTSC/PAL)
- Video outputs - Composite video, S-Video, component video and HDMI
- HDMI Video output Selectable resolutions - 480i, 480p (720), 480p (1440), 720p (60Hz), 576i, 576p (720), 576p (1440).
- Progressive Scan
- Load/Eject 8cm & 12cm discs
- Electronic anti-vibration servo system
- Upgradable firmware utilizing CD-R/RW disc
- Single external power supply +12VDC
- Supports -90° and +90° application angle mounting


Usage Results

Overall minimal failure rate .056% (average of 6 players per 1,000)



Accessories

- Replacement loader if a failure should occur
- External DCC1 board for video trigger buttons
- IR Extension Cable

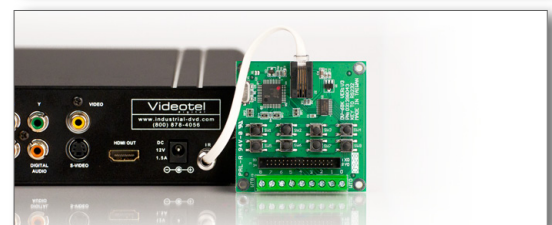

For more information or to place an order please call us or visit us on line
www.industrial-dvd.com • 800-878-4056 • sales@industrial-dvd.com

