

Design Spec Summary

Recording Server

- 750GB Storage for plenty of storage space using “Intelligent Recording Algorithm” that maximizes available space for maximum number of days
- ExacqVision NVR Server
- ExacqVision Web Server for Full Remote Access to view Live and Recorded Video using standard Web Browser (No client software required)
- VideoShield Probe Software
- All licenses to support 1-Camera

Temperature & Humidity Sensors

- Report Outside Ambient Conditions
- Report Enclosure Conditions
- Report Customized Weatherproof Case Conditions
- Custom Outside Ambient Sensor Encasement

Communication Equipment

- Includes 3G/4G Modem
- Full Statefull Inspection Security Appliance
- WiFi Access-Point for local remote access

Solid State Thermal (Heating/Cooling) Module

- Customized Precision Heat Sink/Fan Assembly
- Environmentally Safe, No CFC's

Uninterruptible Power Supply (UPS) w/ SNMP


- Easy to Read LCD Display (No Laptop Required)
- View Status of Power, System Load, and Run-time

IQinVision H.264 HD720P Mega Pixel Camera

- Mounted on the bottom of the enclosure for optimum “Field of View” adjustment
- Adjustable frame rates and resolution based on needs
- Vandal & Tamper proof housing
- You can add additional cameras for additional price per camera

All Inclusive Security Package

RECORDING SERVER
HD CAMERA
CLIMATE CONTROL
SECURITY APPLIANCE
4G INTERNET
WIFI ACCESS POINT
REMOTE VIEWING
BATTERY BACKUP

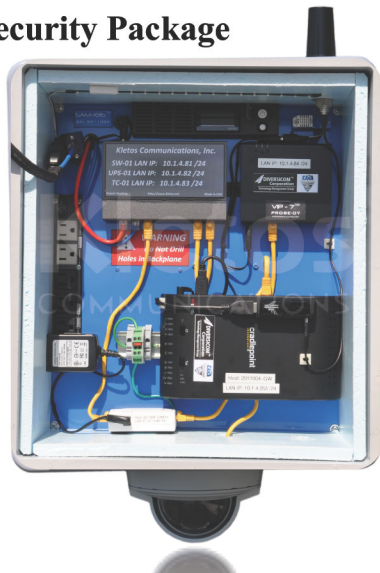

Specifications

Part Number	Guardian VMS™
Product Dimensions	21"H x 16"W x 17"D
Net Weight	65 lbs
Dimensions - Usable Interior Space	16.5"H x 14.5"W x 5.5"D
Power Specs	175 Watt UPS Power Budget 4 Battery Backup Outlets 2 Surge-Protected Outlets 12 Amp Total Load
Communication	Includes 3G/4G Modem •Includes 1 Month of Internet Service •High-Gain Exterior Mount Antenna
Temperature Specs	Cooling Mode •Lower Temp by up to 40°F Heating Mode •Raise Temp by up to 35°F
Warranty	One Year Parts and Labor
Included Equipment	(2) - 2" Square Velcro Kits (4) - 1-Foot Cat-5e Patch Cable (1) - 3-Foot IEC Power Cord (1) - 2-Foot IEC Power Cord (1) - 1-Foot IEC Power Cord (1) - 3/4" Carflex Connector (1) - PG-13 Cable Glands



Management Specifications

Fully Managed UPS via Web Browser & SNMP with the Ability to Monitor:

- System Uptime
- UPS Load (% & Watts)
- Battery Replace Indicator
- Battery Voltage
- Battery Capacity (%)
- Battery Runtime Remaining
- AC Line Frequency
- AC Line Voltage (Min & Max)
- AC Line Failure Cause
- UPS AC Output Frequency
- UPS AC Output Voltage
- UPS Time on Battery

Fully Managed Copper 6-Port 10/100/1000 Network Switch via Web Browser & SNMP:

- VLAN Support
- Spanning Tree Support
- Multicast IGMP Snooping Support
- Port Monitoring of Link Speed / Duplex Mode / Errors
- Port Mirroring for Diagnostics

Fully Managed System Monitoring of Heating/Cooling System via Web Browser:

- Real Time Monitoring of Temperature and Relative Humidity of Enclosure Interior
- Real Time Monitoring of Temperature and Relative Humidity of Ambient Outside Environment
- Easy to read Graphical Display of Temperature and Humidity
- User Customizable Set-Points for Heating and Cooling Thresholds

Enclosure Management:

- Display Current Status of Enclosure Door (Open or Closed)
- Collects Enclosure Critical System Performance Data Points for VideoShield™ Network Monitoring Service

Optional Equipment & Services



VideoShield™ - Remote Monitoring of all critical system functions *1st year free, call for details

- Universal Pole Mounting Kit
- Axis P3344-VD HD IP Camera
- Axis M3114-VE HD IP Camera
- Additional PG-13 Cable Glands
- Additional IEC Power Cords
- 120V 15-Amp Disconnect
- 120V 15-Amp Disconnect with 36Ka Surge Protection
- Additional Category-5e, 1-Foot Patch Cables
- Pre-Configuration of all equipment:
- TCP/IP Address, Mask, & Gateway
- System Host names
- Label all equipment
- Pre-Configuration and Mounting of
- Customer-Supplied Equipment

***For further details and ordering information call 813.677.3312.**

