


# Gap Filler 1000SR (Two-Part)

Thermally Conductive, Liquid Gap Filler Material

## Features and Benefits

- Thermal Conductivity: 1.0 W/m-K
- Excellent slump resistance (stays in place)
- Ultra-conforming, with excellent wet-out for low stress interface applications
- 100% solids - no cure by-products
- Excellent low and high temperature mechanical and chemical stability

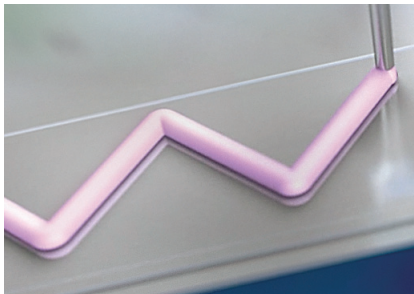

Gap Filler 1000SR is a two-part, thermally conductive, liquid gap filling material that features superior slump resistance. The mixed system will cure at room temperature and can be accelerated with the addition of heat.

Unlike cured thermal pad materials, a liquid approach offers infinite thickness variations with little or no stress to sensitive components during assembly. As cured, Gap Filler 1000SR provides a soft, thermally conductive, form-in-place elastomer that is ideal for fragile assemblies or for filling unique and intricate air voids and gaps.

Gap Filler 1000SR exhibits low level natural tack characteristics and is intended for use in applications where a strong structural bond is not required.

## Typical Applications:

- Automotive electronics
- Computer and peripherals
- Between any heat-generating semiconductor and a heat sink
- Telecommunications

## TYPICAL PROPERTIES OF GAP FILLER 1000SR


PROPERTY	IMPERIAL VALUE	METRIC VALUE	TEST METHOD
Color / Part A	Violet	Violet	Visual
Color / Part B	White	White	Visual
Viscosity, High Shear (Pa-s) (1)	20	20	ASTM D5099
Density (g/cc)	2.0	2.0	ASTM D792
Mix Ratio	1:1	1:1	—
Shelf Life @ 25°C (months)	6	6	—
<b>PROPERTY AS CURED</b>			
Color	Violet	Violet	Visual
Hardness (Shore 00) (2)	75	75	ASTM D2240
Heat Capacity (J/g-K)	1.0	1.0	ASTM D1269
Continuous Use Temp (°F) / (°C)	-76 to 347	-60 to 175	—
<b>ELECTRICAL AS CURED</b>			
Dielectric Strength (V/mil)	500	500	ASTM D149
Dielectric Constant (1000 Hz)	5.1	5.1	ASTM D150
Volume Resistivity (Ohm-meter)	10 <sup>11</sup>	10 <sup>11</sup>	ASTM D257
Flame Rating	V-O	V-O	U.L. 94
<b>THERMAL AS CURED</b>			
Thermal Conductivity (W/m-K)	1.0	1.0	ASTM D5470
<b>CURE SCHEDULE</b>			
Pot Life @ 25°C (min) (3)	60	60	-
Cure @ 25°C (hrs) (4)	20	20	-
Cure @ 100°C (min) (4)	10	10	-

1) Capillary Viscosity, Initial, 4500 sec<sup>-1</sup>. Part A and B measured separately.  
 2) Thirty second delay value Shore 00 hardness scale.  
 3) ARES Parallel Plate Rheometer - Working life as liquid, time for modulus to double.  
 4) ARES Parallel Plate Rheometer - Estimated time to reach 90% cure.

## Configurations Available:

- Supplied in cartridge or kit form

## Building a Part Number

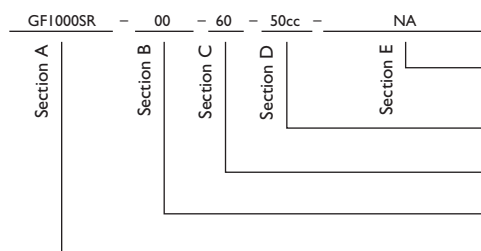

## Standard Options

◀ example

NA = Selected standard option. If not selecting a standard option, insert company name, drawing number, and revision level.

Cartridges: 50cc = 50.0cc, 400cc = 400.0cc  
 Kits: 1200cc = 1200.0cc, or 10G = 10 gallon

Pot Life: 60 = 60 minutes

00 = No spacer beads  
 07 = 0.007" spacer beads

GF1000SR = Gap Filler 1000SR Material

Note: To build a part number, visit our website at [www.bergquistcompany.com](http://www.bergquistcompany.com).



[www.bergquistcompany.com](http://www.bergquistcompany.com)

The Bergquist Company -  
 North American Headquarters  
 18930 West 78th Street  
 Chanhassen, MN 55317  
 Phone: 800-347-4572  
 Fax: 952-835-0430

The Bergquist Company -  
 European Headquarters  
 Netherlands  
 Phone: 31-35-5380684  
 Fax: 31-35-5380295

The Bergquist Company -  
 Asia Headquarters  
 Hong Kong  
 Phone: 852-2690-9296  
 Fax: 852-2690-0782

All statements, technical information and recommendations herein are based on tests we believe to be reliable, and THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MARKETABILITY AND FITNESS FOR PURPOSE. Sellers' and manufacturers' only obligation shall be to replace such quantity of the product proved to be defective. Before using, user shall determine the suitability of the product for its intended use, and the user assumes all risks and liability whatsoever in connection therewith. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE EITHER IN TORT OR IN CONTRACT FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL OR CONSEQUENTIAL, INCLUDING LOSS OF PROFITS OR REVENUE ARISING OUT OF THE USE OR THE INABILITY TO USE A PRODUCT. No statement, purchase order or recommendations by seller or purchaser not contained herein shall have any force or effect unless in an agreement signed by the officers of the seller and manufacturer.

PDS\_GF1000SR\_0911