


Super-Trex® Variable Frequency Drive Power Cable

TPC
NEW
PRODUCTS

- UL Listed
- c(UL) Listed
- 600 Volt
- TC – ER
- 90°C
- FT-4
- 2000 Volt Corona Resistant

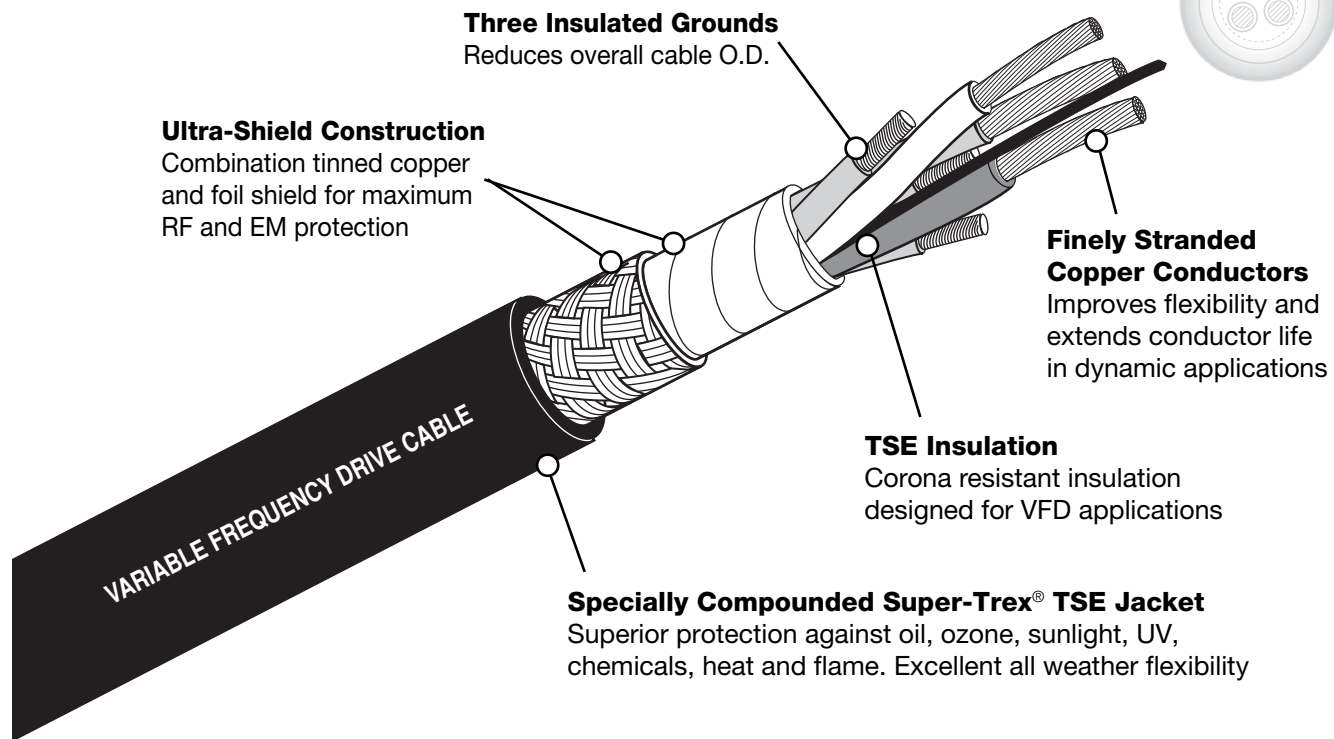

ORDERING INFORMATION

PART NUMBER	POWER COND. SIZE AWG/COND.	POWER COND. STRANDING	GROUND SIZE COND./AWG	AMPACITY (1)	NOM. O.D. (IN.)	WT. (LBS.) PER 1000'
89103	#4 - 3 Cond	259 x .0127	3 x 12 AWG	114	1.19	1101
89104	#2 - 3 Cond	259 x .0160	3 x 10 AWG	152	1.34	1512
89106	1/0 - 3 Cond	266 x .0199	3 x 10 AWG	205	1.61	2174
89107	2/0 - 3 Cond	342 x .0199	3 x 10 AWG	237	1.70	2510
89109	4/0 - 3 Cond	532 x .0199	3 x 8 AWG	316	1.99	3727
89110	262Kcmil - 3 Cond	646 x .0199	3 x 6 AWG	362	2.21	4581
89111	373Kcmil - 3 Cond	925 x .0199	3 x 6 AWG	449	2.45	5968
89112	444Kcmil - 3 Cond	1110 x .0199	3 x 6 AWG	497	2.60	6922
89113	535Kcmil - 3 Cond	1332 x .0199	3 x 6 AWG	555	2.85	8246

NOTE: (1) Ampacity based on NEC 2008 Table B.310.3 Ambient Air Temperature of 30°C; Conductor Temperature of 90°C



TPC WIRE & CABLE CORP.

7061 E. PLEASANT VALLEY RD.
INDEPENDENCE, OHIO 44131

800-521-7935 FAX 866-528-2930
CANADA 800-545-0122 MEXICO 800-290-5614
www.tpcwire.com

WARRANTY AND DISCLAIMER: Seller makes no warranties, express or implied, with respect to this product, and seller disclaims any implied warranties of merchantability or fitness for any particular purpose. Further, seller will not be responsible for any consequential, incidental or indirect damages (including, but not limited to, any loss of profit) from any cause whatsoever.

TPC1039 (REV. 3/11) PRINTED IN U.S.A. All rights reserved. No portion of this publication, whether in whole or in part, can be reproduced without the express written consent of TPC Wire & Cable Corp. ©Copyright 2011 by TPC Wire & Cable Corp. ®Registered Trademark of TPC Wire & Cable Corp. ™Trademark of TPC Wire & Cable Corp.

Innovation at work