

Optolinx FCU-5002-SFP+

10GBase-R Fiber Optics 10G SFP+ to 10G SFP+ Media Converter




Features


- ▶ Supports 10 Gigabit Fiber to Fiber Full-Duplex Conversion
- ▶ Complies with IEEE 802.3ae 10GBASE-R
- ▶ LED Indicators for Link and Power Status
- ▶ Supports 3R (Re-amplifying, Re-shaping, Re-timing) Optical Signal Regeneration
- ▶ Fully Compatible with FCU-RACK16 Series
- ▶ 5-Year Warranty




▶ Dimensions (unit = mm)

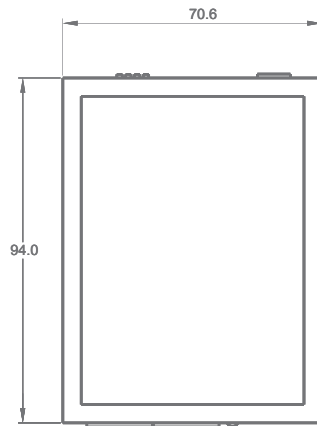

Top View

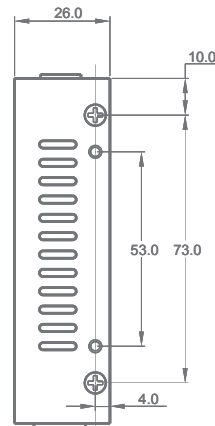

Side View



Panel View



Rear View

► Specifications

Standard

IEEE 802.3ae 10GBase-R
Complies with SFF-8431

Interface

10GBase-R: 2 x SFP Slot

Wavelength

*See SFP Specifications

Typical Distance

*See SFP Specifications

Minimum TX Power

*See SFP Specifications

Maximum TX Power

*See SFP Specifications

Sensitivity

*See SFP Specifications

Link Budget

*See SFP Specifications

LED

Power, F/O1, F/O2

Power Requirement

AC Input: 100VAC~240VAC
Frequency Range: 50, 60 Hz
DC output: 5V, 2A

Power Consumption

DC 4.3W; AC 5.8W

Operation Temperature

0° C to 50° C (32° F to 122° F)

Storage Temperature

-20° C to 60° C (-4° F to 140° F)

Operation Humidity

5% to 90% (Non-condensing)

Mechanical

Casing: IP30 Metal Case
Dimension (W x H x D): 71 x 94 x 26 mm (2.80 x 3.70 x 1.02 inches)
Weight: 0.6 Kg (1.3 lbs)
Installation: DIN-Rail/Wall Mountable

Emission/Safety

FCC Class A, CE

Warranty

5-Year Warranty

► Ordering Information

FCU-5002-SFP+

10GBase-R Fiber Optics 10G SFP+ to 10G SFP+ Media Converter, Standalone Module ***

*** SFP MODULES SOLD SEPARATELY ***

Optional Accessories

SFP-10G-M

10G SFP+ Module, Multi-Mode, 300m

SFP-10G-S10

10G SFP+ Module, Single-Mode, 10Km

SFP-10G-S40

10G SFP+ Module, Single-Mode, 40Km

FCU-BK

Mounting Brackets for FCU Modules

DIN-RAIL-KIT

DIN-Rail Mounting Kit

Aaxeon Technologies

445 Capricorn St.
Brea, CA 92821
USA

Toll-Free: (877) AAXEON5 (229-3665)
Phone: (714) 671-9000
FAX: (714) 671-9944
e-Mail: info@aaxeon.com

aaxeon
www.aaxeon.com