




Introduction

The Roll-Ring® solution was invented over thirty-five years ago to solve slip-ring related performance issues for mission critical applications such as gyroscopes for the F-14 fighter aircraft and rotary power transfer the International Space Station. Today Roll-Rings® are found operating in the SPS-48E radar system for the US Navy, in the Patriot Missile System, in satellite communications components for the South Korean Navy, and in military and civilian Air Traffic Control radar systems in nineteen countries around the globe. With its advanced capabilities and lower total cost of ownership Roll-Rings® can assist military and aerospace customers with rotary power, data and signal transfer challenges.

Design

The benefits of the Roll-Ring® solution are a direct result of its simple yet rugged design. Roll-Rings® are rings of spring copper plated with gold which roll between two gold plated concentric grooves. In the design pictured two Roll-Rings® are used per circuit and there are six circuits total. Each circuit is separated by insulators in the axial and radial directions. Rotor and stator are precisely aligned with bearings to ensure proper rotation for long life. The rolling electrical interface is made reliable due to the compression otherwise known as pre-load of the Roll-Ring® between the rotor and stator grooves. Seals are added as necessary for the specific application environment.

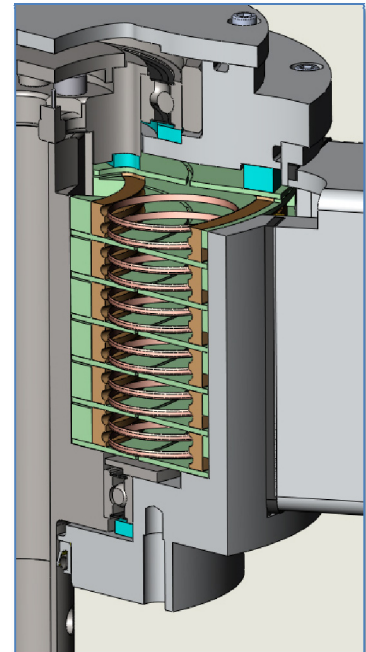

Maintenance-Free

With military budgets facing significant reductions and with military personnel tasked with increasing scope of responsibilities, designing, operating and maintaining systems with components that require periodic maintenance where effective maintenance-free alternatives are available put the Warfighter and the Department of Defense at a disadvantage. Roll-Rings® eliminate field maintenance by employing a proven design that produces extremely little wear over a very long operating life. The maintenance-free benefit enables cost reductions in parts, personnel, training and technical support while improving operational readiness. The Roll-Ring® design delivers the additional unique benefit of reducing the potential for sabotage as no maintenance access port is provided.

Long Life

A standard Air Traffic Control Roll-Ring® unit was placed on test at 200 rpm for over two and a half years to simulate 30 years of continuous duty. The unit logged 240 million revolutions before the test was concluded. All circuits were found to be within specification at the end of the test. The vast majority of Roll-Rings® supplied for mission critical applications today will survive long past the anticipated service



life of the system in which they are installed. The long operating life of a Roll-Ring® has the potential to reduce the total cost of ownership for the system they are designed into.

Diamond-Roltran is also an FAA NCMS repair facility for refurbishing microwave rotary joint and slip-ring assemblies for satellite broadband communication for a US airline. The bulk of the failures driving the need for service come from slip ring wear debris. Roll-Rings® in this satellite communication application would enable practically indefinite hours of operation thus increasing the time between system servicing.

Low Resistance

A 600 Amp circuit designed for wind turbines using 3" diameter Roll-Rings® measured 0.81 mΩ under rotation. The International Space Station UTA assembly tested at 1.9 milliohms at ambient conditions with two circuits in series including the loop-back connector at the rotating end. The gold on gold rolling interface allows for very low resistance for all Roll-Ring® devices. This has the benefit of reducing power loss for power, signal and data circuits and reducing heat transfer management requirements.

Surge Capacity

The BGRRS module for the International Space Station, with each crossing designed for a nominal 113A, was required to survive a 1 millisecond in-rush fault current pulse of 4500A. With the unit stationary at ambient temperature and pressure an in-rush current of 5000A was applied across two crossings in parallel peaking at approximately 0.27 ms with a 1.0 ms period. The BGRRS modules measured no increase in resistance between pre and post test measurements and disassembly showed no detectable damage by the application of the fault current. Roll-Rings® have the proven capability for high current handling.

Static Operation

Wind turbines on Black Island in Antarctica operate for months at gale force winds with no change in direction. This is a problem for slip-rings as once the wind finally shifts the balance of the ring surface is not clean and thus creates overheating and other issues requiring maintenance in an expensive to access location. Roll-Rings® are capable of indefinite operation in a fixed position without reducing the capability of the unit for low resistance electrical transfer once rotation has resumed. This benefit is available to Roll-Ring® units designed to handle 5 amps per circuit as well as units designed for 1,200 amps per circuit and beyond.

Data Rates

15 MBit/s at 30 MHz on an IntelliBus network was successfully demonstrated with a six channel Roll-Ring® unit running 580 hours at 1,200 rpm. The application requirement was to transfer on-blade



performance and operating measurements for a rotary wing aircraft during flight tests. The incumbent slip ring caused expensive delays in the flight test schedule due to its relatively short life span before wear debris increased data error rates to unacceptable levels. The 15 MBit/s data rate was the upper limit for IntelliBus network for this application but was not the upper bit rate for the Roll-Ring®.

Temperature range

Roll-Rings® operating now on the International Space Station successfully tested at temperatures ranging from -55°C to 80°C at sea level atmospheric conditions as well as under the perfect vacuum of outer space. Roll-Rings® are in service today as part of the Patriot Missile System as well as in service for the Navy's shipboard SPS-48E air search radar system proving suitability for land and sea applications.

Shock

A twelve channel Roll-Ring® installed around a Diamond Antenna & Microwave rotary joint successfully survived a three axis 300g shock load as part of US Navy qualification testing. The Roll-Ring® devices used for the International Space Station successfully passed a 300g shock load test. The comparative light weight of a Roll-Ring®, the concentric conductive grooves that it rides in and the relatively high compressive load the Roll-Ring® is under while installed in the groove enables a Roll-Ring® device to survive extreme shock loads.

Conclusion


Roll-Rings® deliver mission critical performance through maintenance-free long life operation and lower cost of ownership as compared to slip rings. A growing number of significant military and aerospace equipment customers rely on Roll-Rings® for their mission critical applications. NASA, the US Navy, Raytheon and others have subjected Roll-Rings® to full qualification testing and in each case Roll-Rings® have passed. Roll-Rings are a proven solution for rotary power, signal and data transfer.



**Diamond Antenna & Microwave
Air Traffic Control Rotary Joint with
Integrated Roll-Rings**



**Patriot Missile System
with Roll-Rings**

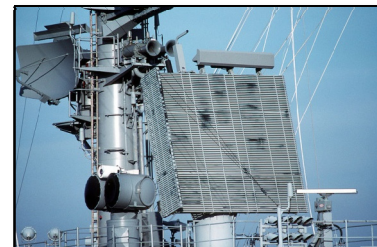

**US Navy SPS-48E Radar
with Roll-Rings integrated into the
high power microwave rotary joint**