

## Main Features

- 3rd generation Intel® Core™ processor family
- Intel® HM76 chipset (QM77 option)
- Two 204-pin SO-DIMM socket supports up to 16GB DDR3 1333/ 1600 MHz SDRAM
- Display: DVI-I/ HDMI/ Dual 48bit LVDS (Option LVDS2)
- 1x Mini-PCIe support mSATA or 3G/ SIM, and optionl TPM
- 4 x SATA with RAID 0,1,5,10
- 2 x Intel Gbe Ethernet
- 10 x USB, 4-in/ 4-out GPIO, Mic-in , Line-out
- Serial port: 5 x RS232, 1 x RS232/ 422/ 485 port
- Support AT/ ATX mode and Dual +12Vdc/ +24Vdc input
- 1 x PCIe x16 slot 2 x PClex1 on edge golden finger

## Product Overview

The NEX609 is a Mini-iTX board with 3rd generation Intel® Core™ processor family, which supports DDR3 1333/ 1600 memory, along with Integrated graphics controller, Intel® HD Graphics 4000, along with integrated graphics for large display application to support Multiple Display. Intel® HM76/QM77 chipset provides Four SATA, Six serial ports, Ten USB 2.0 ports, two Gigabit Ethernet LAN port, One PCIe x16 slot, One Mini-PCIe with 3G/ WiFi / MSATA interface, dual 12V/ 24V input for Kiosk/ digital signage/ gamming/ applications.

## Specifications

### CPU Support

- 3rd generation Intel® Core™ processor

### Main Memory

- Two 204- pin SO- DIMM socket supports up to 16 GB DDR3 1333/ 1600MHz SDRAM

### Chipset

- Intel® HM76/ QM77 chipset ( option)

### BIOS

- AMI BIOS
- Plug and play support
- Advanced Power Management
- Advanced Configuration & Power Interface

### On-board LAN

- 2 x Intel® PCI Express Gigabit Ethernet
- Support Boot From LAN (PXE)
- 2 x RJ45 with LED

### Display

- 3rd generation Intel® Core™ processor integrated Intel® HD Graphics 4000 engine, Intel® HD Graphics integrates high-performance graphics and media processing right on the processor ,delivers sophisticated graphics for large display application, three independent display support.
- DVI-I interface: Analog VGA support

### HDMI interface:

- Resolution:
  - Up to 2560 x 1600 @60Hz for 1st display port
  - Up to 1920 x 1600 @60Hz for 2st display port
  - Up to 1920 x 1200 @60Hz for 3st display port

### – LVDS1 interface:

48bit LVDS interface, 2 x DF13 20-pin LVDS connector for internal connection.

LVDS2 interface (option, Through SDVO w/ CH7308).

48bit LVDS interface, 2 x DF13 20-pin LVDS connector for internal connection.

### – CCFL interface:

2 x CCFL for LCD Panel Backlight Inverter with Analog & PWM dimming control.


- Analog VGA interface: 1 x DB15 VGA port, support up to 2048 x 1563 @ 60Hz

- LVDS interface: support single 18/ 24-bit LVDS channel

### Audio

- Realtek ALC886 CODEC for High Definition
  - 1 x Phone Jack for Mic-In
  - 1 x Phone Jack for Line out
  - 1 x phone jack for Line In
  - 1 x 5 pin 2.0 pitch pin header for speak-out

## Block Diagram

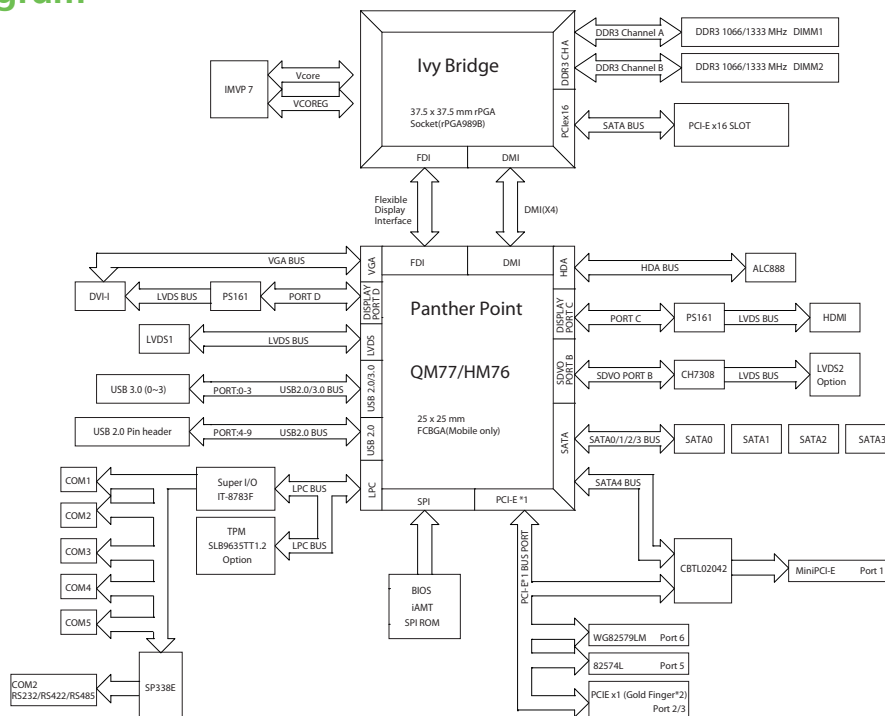

### Expansion

- 1 x Mini-PCIet
- 1 x PCIe x16
- 2 x PCIe x1 golden finger

### I/O Interface

- Serial port: 6 port  
COM1,6: RS232 DB-9 male connector on edge I/O  
COM2: RS232/ 422/ 485 DB-9 male connector on edge I/O  
COM3,4,5: RS232 1x 6 2.0mm JST connector
- USB 2.0/ 3.9: 10 ports  
USB 3.0 x 4 ports edge connector  
USB 2.0 x 6 ports by 2.0mm pin connector
- 8 GPIO lines via header (GPI 0~3 and GPO0~3) TTL Level (0/ 5 V)
- On-board Power LED and HDD Active LED Pin Header
- 1 x 4-pin fan connector (for CPU)
- 1 x 3-pin fan connector (for System)
- 1 x Keyboard/Mouse pin header
- On board Buzzer/ SMBus2.0/ Reset SW/ On &Off switch button

### Edge I/O Interface

- 1 x dual stack DB9 male + DB9 male for COM1 & COM2
- 1 x HDMI
- 1 x DVI-I + DB9 male FOR COM6
- 2 x RJ45 + dual stack USB
- 1 x Line-Out/ MIC-in/ Line-in

### Watchdog Timer

- Watchdog timeout can be programmable by Software from 1 second to 255 seconds and from 1 minute to 255 minutes (Tolerance 15% under room temperature 25°C)

### Storage

- 4 x SATA port with RAID 0,1,5,10 function. (option)

### System Monitor

- Monitoring of 4 voltages and 2 temperatures and 2 Fans speed detection
- 4 Voltage (Vcore, +12V, +3.3V, 5V)
- 2 Temperatures (CPU, System)
- 2 Fan Speed detection

### On-board RTC

- On-chip RTC with battery backup
- 1 x External Li-Ion battery

### Power Input

- Support AT and ATX mode

### Power Requirements

- Power requirement: Dual +12V & 24V DC Input
- One 4-pin power connector

### Dimensions

- Mini-ITX M/B form factor
- 170mm (L) x 170mm(W)

### Environment

- Operating temperatures: 0°C to 60°C
- Storage temperature: -20°C to 85°C
- Relative humidity: Operating 10% to 90%, non-condensing

### Certifications

- CE approval
- FCC Class A

## Ordering Information

- **NEX609 (P/N: 10G00060900X0) RoHS Compliant**

Mini ITX, Intel® 3rd generation Intel® Core™ processor family with DVI-I/ HDMI / Two 48-bit LVDS interface/ 2 x Gigabit LAN/ 10 x USB/ 6 x COMs/ TPM ( option)/ MSATA/ Dual 12 & 24 Power input)