

The AreaMax is Evluma's premier 40W LED luminaire for area and security lighting. The AreaMax introduces a revolutionary new way to deliver dusk-till-dawn efficiency by reducing your dependence on the traditional photocontrol. Affordable and easy to install, the AreaMax slides onto the existing pole arm typically used by NEMA Type V dusk-till-dawn fixtures. As high as 93 lm/W for the entire system, the 40W AreaMax is a recommended LED replacement for the average 150-175W HID fixture. Order the AreaMax with ConnectLED and take advantage of additional maintenance and energy savings with dimming features and remote commissioning/decommissioning.

A M A X - - - - -

PRODUCT ID	WATTS	PERFORMANCE CODES	PHOTOMETRIC TYPE	LENS
AMAX = AreaMax	40 = 40 watts	4K-6 5K-6	V = Type V	C = Full Cut-Off D = Dome

ALL MODELS SHIP  
WITH BUILT-IN  
PHOTOCONTROL  
FAILSAFE MODE.



#### PERFORMANCE CODES

Code	CCT	CRI	Lumens	LED mA	BUG	IES File Numbers
4K-6 (D)	4500K	>70	>3000	700mA	B2-U2-G1	ITL75686+75689
5K-6 (D)	5500K	>65	>3500	700mA	B2-U2-G1	ITL75687+75690
4K-6 (C)	4500K	>70	>3000	700mA	B1-U0-G1	ITL75688+75691
5K-6 (C)	5500K	>65	>3500	700mA	B1-U0-G1	ITL75688+75690


#### ELECTRICAL PERFORMANCE

- 120-277 VAC 50/60 Hz
- Power Factor >95% and THD <10%
- **Replaceable** high capability surge protection for 20kV/10kA per IEEE/ANSI C62.42.2 - 2002 Location Category C-High

Photocontrol and mounting arm are not included.



AreaMax with Full Cutoff Lens C

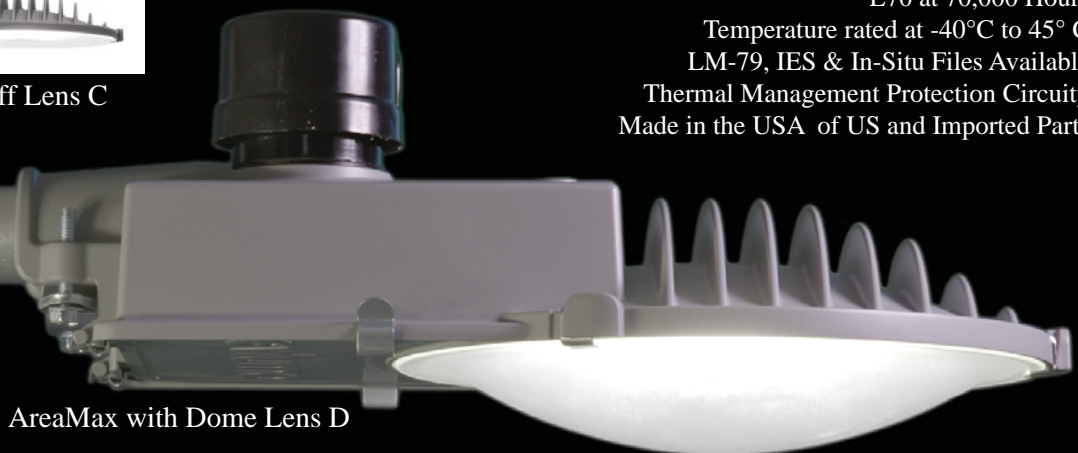

AreaMax with Dome Lens D

UL Pending  
RoHS Compliant  
L70 at 70,000 Hours  
Temperature rated at -40°C to 45°C  
LM-79, IES & In-Situ Files Available  
Thermal Management Protection Circuitry  
Made in the USA of US and Imported Parts

**evluma**

## AREAMAX™

The AreaMax introduces a revolutionary new way to deliver dusk-till-dawn efficiency with a built-in Photocontrol Failsafe Mode. Compatible with NEMA standard twist-lock photocontrols, place the AreaMax in the field with a photocontrol installed. Over time, an internal processor will calibrate the AreaMax to its unique geographic times for sunrise and sunset. Should the photocontrol fail, the AreaMax will take over based on the information it has collected eliminating a maintenance visit and guaranteeing continuous operation. The AreaMax is also compatible with wireless photocontrols.

## ConnectLED™

ConnectLED is a software application that communicates with the AreaMax via BLE (Bluetooth Low Energy) to:

- commission /decommission the fixture
- create brightness settings
- upload custom dimming algorithms.

Run ConnectLED on a Windows 7 laptop with a licensed dongle\* at a range of 150' from the AreaMax.

### CONNECTLED™ SOFTWARE

37598451	25 UNIT LICENSE PACK**
41058338	PC DONGLE*
39140436	AMAX, BLE REMOTE (commission/decommission only)

\*\*Delivery methods for ConnectLED may vary depending on quantity and preference. Please contact your sales agent for current information.

## Thermal Management

Evluma designed the AreaMax with two critical things in mind: maximum lumens per watt and maximum cooling. Low temperatures are key to LED long life and brightness. Critical components were selected for their minimum thermal resistance and paired with a custom light engine and casting design effectively executing this strategy.

In addition, LED life is assured by thermal management protection circuitry that controls current levels to the LEDs based on temperature. Temperature is measured at the LED package, often referred to as the solder point temp, or  $T_{sp}$ . At 65°C the fixture begins to cut back on the current to the LEDs to either maintain, or reduce the temperature back down to 65°C.

## Warranty


The AreaMax carries Evluma's standard 5 year warranty.

### CONSTRUCTION


- 16 long life LEDs
- high efficiency reflective optics
- textured & tempered glass lens
- die cast aluminum housing with grey powder coat
- accepts 2" or 1 1/4" arm
- performs to IP66 standards
- factory installed 66" pigtail
- weight = 9lbs

## Multiple Lens Options

Polar Candela Distribution Vertical Plane (1) and Horizontal Cone (2) through maximum candela.

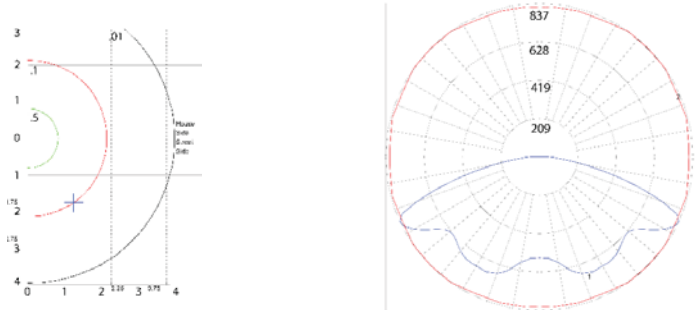

Dome Lens: Max Candela: 837 at 65° Angle  
.01 fc at 4 25' mtg htgs B2-U2-G1. ITL75687

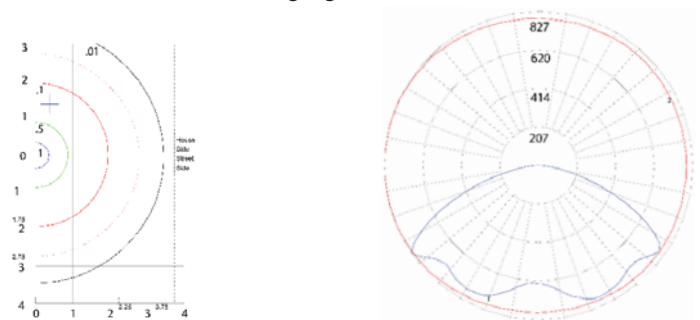

Flat (Full-Cutoff Lens) Max Candela: 811 at 55° Angle  
.01 fc at over 3 25' mtg htgs. B1-U0-G1. ITL75688.

## Dimensions

