

TREQ®-VM / TREQ®-VMx

7" Mobile Data Terminal for Rugged In-Vehicle Use





The TREQ®-VM and TREQ-VMx are powerful mobile data terminals available in both fixed-mount and removable versions. They include all of the industry standard interfaces for in-vehicle use, while maintaining the ruggedness and reliability that the TREQ family is known for.



Product Highlights

- ▶ Available in fixed-mount and removable versions
- ▶ 800 x 480 pixel WVGA, 7" (178 mm) diagonal, LED lighted, TFT color LCD display with touch screen
- ▶ Integrated cellular modem, GPS receiver and J1708/J1939 (TREQ-VMx)
- ▶ 10/100Base-T wired Ethernet, 802.11b/g/n wireless Ethernet
- ▶ EIA-232, EIA-232/422/485, five USB 2.0 high-speed host ports
- ▶ One hour active life lithium-polymer battery
- ▶ Extended temperature range
- ▶ Digital camera available on removable version
- ▶ Windows® Embedded CE 6.0 R3 Core or Professional

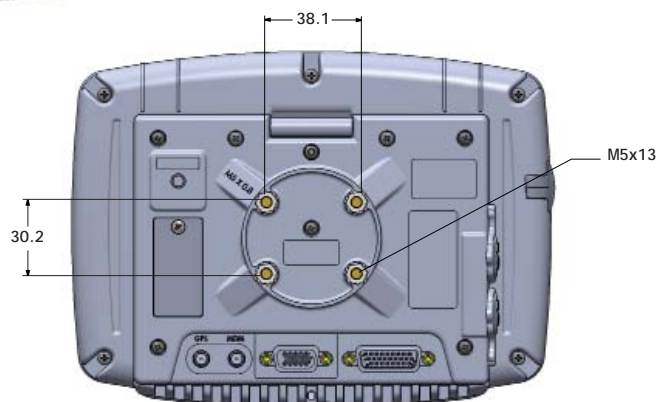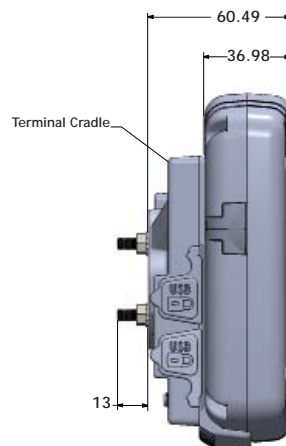

Dimensions shown in mm.

Specifications			
Feature	Detail	TREQ-VM	TREQ-VMx
Display	Type	800 x 480 WVGA, TFT color LCD	
	Size	7" (178 mm) diagonal	
	Lighting	LED	
	Brightness	Software controllable	
Touch Screen	Type	Analog-resistive	
Interface	Ethernet	10/100Base-T wired Ethernet, 802.11b/g/n with internal antenna	
	Serial	One EIA-232/422/485 configurable; one EIA-232	
	Additional Serial	N/A	One EIA-232
	USB	Four 2.0 high-speed host ports (type A connectors, two locking); Fifth 2.0 high-speed host port in DB26HD connector	
	Vehicle Bus	N/A	J1708/J1939 (CANbus) interface
	Digital I/O	N/A	Two general inputs, two general outputs
	Ignition Sense	One ignition sense	
	Cellular Modem	N/A	2G Quad-band GSM/GPRS [†] 3G UMTS/HSPA+ or CDMA/EV-DO [†]
	GPS	N/A	GPS receiver [†]
	Camera	640 x 480 Digital camera (available on removable devices only)*	
Processor	Type	Marvell® XScale® PXA166, 800 MHz (ARM)	
Memory	RAM	256 MB DDR3	
	Flash	4 GB NAND	
	Expansion	Micro SD	
Realtime Clock	Standard	Battery-backed, 1 second resolution	
Audio	Speaker	Built in; two front-facing	
	Microphone	Built in; front-facing	
	Other	N/A	3.5 mm TRS headphone jack for voice I/O
Power	Input	8 to 32 VDC (exceeds J1455)	
	Consumption	10-12 Watts typical (16-17 Watts while battery charging)	
	Battery	Lithium-Polymer with nominal 1 hour active life	
	Other	SAE J1455 compliant	
Mechanical	Type	Fixed-mount or removable with cradle (uses RAM Mount or comparable)	
	Size	215 (W) x 156 (H) x 65 (D) mm (maximum with rubber boot)	
	Mass	1 kg	
	Housing Material	Blended polycarbonate and polyester resin	
	Cables	Sold separately	
Environmental	Temperature	Operating: -20 to 60 °C; Storage: -40 to 75 °C	
	Humidity	0 to 95%, non-condensing	
	Vibration	4 g 10-1500 Hz	
	Shock	40 g, 11 ms, any axis	
Certifications	CE	EN60950-1, EN55022, EN55024	
	EMC	FCC Part 15, Class A	
	RoHS	Compliant	
Software	Operating System	Windows® Embedded CE 6.0 R3 Core or Professional (optional)	Windows® Embedded CE 6.0 R3 Professional
	Development Environment	Microsoft® Visual Studio®, Win32, MFC, Visual C#® and Visual Basic®	

Beijer
ELECTRONICS

US Office

Beijer Electronics, Inc.
2212 South West Temple #50
Salt Lake City, Utah 84115-2648 USA

www.BeijerElectronicsInc.com / 801-466-8770

Headquarters

Beijer Electronics Products AB
P.O. Box 426
201 24 Malmö, Sweden

www.BeijerElectronics.com / +46 40 35 86 00

* = Optional

† = External antenna required

M01-075-00 REV 05

6 FEBRUARY 2013

Copyright © 2013 Beijer Electronics. All rights reserved.

The information at hand is provided as available at the time of printing.
Beijer Electronics reserves the right to change any information without
updating this publication. Beijer Electronics does not assume any
responsibility for any errors or omissions in this publication.