


SVI-MG 8000

## SS7 Media Gateway

The SVI-MG 8000 is the flagship product in the SVI-MG range providing for the largest deployments with full dual redundancy as standard.

A single, one-stop SS7 to VoIP product solution offering full SS7 to SIP/H.323 signalling interconnect and TDM Voice/Data conversion to industry-standard VoIP Codecs. Providing for larger scale deployments and offering OC-3/STM-1/DS3 support alongside standard E1/T1 interfaces.

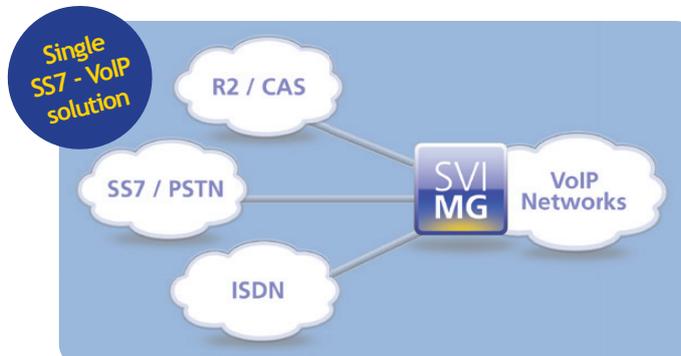

This high end gateway allows carriers, ISPs and service providers to add VoIP network breakout to legacy SS7, ISDN, CAS and R2 networks.

### Benefits

Where competing media gateways only provide lower layer access to the PSTN network especially for SS7 interconnect, the SVI-MG SS7 Media Gateway provides full call control routing for SS7 traffic without the need for third party media gateway controllers or protocol converters.

Provides as standard a fully featured onboard and remote management interface, powerful routing engine and built in security with a range of industry standard interfaces i.e. RADIUS, SQL to allow easy integration into clients existing routing and billing network infrastructure.

The SVI-MG offers a feature rich gateway platform providing call progress tones, voice announcements. Bolt-on options include an integrated wholesale billing platform, SIP registration database, and a fully featured Call-Back service.

The MG has been deployed worldwide and combined with Squire Technologies first class installation and support services allows new VoIP services to be delivered quickly, cost effectively and is offered in 3 models, 1000, 2000 and 8000 to satisfy client's deployment requirements and budget.

[www.squire-technologies.com](http://www.squire-technologies.com)



### Features

- Comprehensive web GUI/CLI interface
- Scales from 8E1 to 1000 E1/T1
- Support for STM-1/OC3/DS3/T3
- SIP, H.323, SIP-I, SIP-T
- Support for wide range of industry standard VoIP Codecs
- SS7, ISDN, CAS, R2
- SIGTRAN
- Redundancy Support
- Optional integrated Wholesale Billing
- RADIUS support for 3<sup>rd</sup> party billing
- Intelligent Call Routing
- Network Management over SNMP
- Fully featured OA&M interface
- SIP Registration



squire technologies  
**Make the switch**

## Technical Specifications

### Physical Dimensions

- **Physical Interfaces**  
E1/T1 OC-3/STM-1/DS3/T3
- **Scaling**  
8E1 to 1000E1  
1 to 9 x STM-1  
2 to 27 T3
- **Upgrades**  
8E1, 16E1  
1 x T3, 2 x T3, 3 x T3  
1 x STM-1
- **Form Factor**  
cPCI
- **Chassis'**  
1U, 2U, 5U, 8U & 11U cPCI

### SS7 Dimensions

- SS7 Signalling links - 128
- Originating Point Codes OPC - 32
- Destination Point Codes DPC - 1024
- Linksets - 128
- A, F link support - Yes

### PSTN Supported Protocols

- SS7 - ANSI, ETSI, ITUT and over 50 variants
- ISDN - ETSI, ITUT, ANSI and country/switch variants
- CAR/R2 - MF-R1, MFC-R2 with many country variants

### VoIP Supported Protocols

- SIP Version 2
- SIP-T  
RFC 3372 Session Initiation Protocol for Telephones (SIP-T)
- SIP-I  
ITU Q.1912 for ISUP/C7-to-SIP inter working
- H.323  
ITU Version 2 and 4 Fast and Slow Start Gateway and Gatekeeper interconnect
- SIGTRAN M3UA, M2UA, M2PA, IUUA

### VoIP Media

- **Voice Coders**  
G.711, G726/G727, G723.1, G.729 A/B, Linear PCM, GSM-FR, MS-GSM, OKI ADPCM, NetCoder, G.728, G.729E, EVRC, QCELP, AMR, GSM EFR, ILBC
- **Echo Cancellation**  
G.165 and G.168 with 32, 64 or 128 ms tail length
- **Fax**  
T.38 compliant group 3 fax relay, FAX over G711
- **DTMF Packet and PSTN side detection and generation**  
RFC 2833, SIP Info, H323 Event
- **Call Progress tone, VAD, CNG, modem detection, jitter buffer, silence suppression**

### IP Management

- ToS/DiffServ support

### Routing and Call Management

- Called/Calling Party Number
- Originating Route
- Time of Day / Week
- Reattempt on alternative routes
- Call blocking
- Digit Manipulation
- Protocol Manipulation
- SQL Support for MySQL, PostgreSQL

### Statistics

- Call statistics (Ingress, egress)
- ASR, PDD, ACD, QoS (native and SNMP)
- CDR analysis

### SNMP

- SNMP Version 2

### Billing

- **CDR**  
CSV format for easy analysis  
Automated FTP upload
- **RADIUS**  
RFC 2139, 2138  
Cisco VSA compliant
- **Integrated Wholesale Billing**

### System Logging

- Real time configurable logging levels
- Detailed protocol debug
- System and exception logs
- User and Admin history

### Hardware Options

- Chassis options depending on customer requirements  
Delivered in 1U, 2U, 5U, 8U and 11U cPCI  
Hardware High Availability chassis  
-48 DC and 240 AC
- **Environmental**  
EN55022, EN55024, CISPR 22, 47 CFR 15 (ANSI C63.4: 1992)
- **Safety**  
BSEN 60950, EN41003:  
1998, IEC CB  
Scheme 1950 Third Edition

## Support



Squire Technologies provides a range of post-sales support packages to meet client requirements and budget. These range from 6 months web and email support provided free of charge on all purchased products to dedicated 24/7 telephone support.

Visit [www.squire-technologies.com](http://www.squire-technologies.com)

For further product information on SS7 VoIP products for carriers, operators and service providers, plus case studies and customer testimonials.



### Corporate Headquarters

64 High West Street, Dorchester  
Dorset DT1 1XA, UK

T +44 (0)1305 757314  
F +44 (0)1305 757309  
E [enquiries@squire-technologies.com](mailto:enquiries@squire-technologies.com)

### Partners & Resellers

Squire Technologies are actively building partnerships globally.

Contact us for information about resellers in your country, or find out how to establish a channel partnership.