

What design promises, it maintains? The continuous, side-sealing machine with intermittent sealing bar. Now available in an Economy version as well. Reliability is our first and foremost priority and it comes even before the certainty that you'll never grow tired of using it.

FEATURES

Continuous, side-sealing machine equipped with an intermittent welding bar. Side-sealing welding in order to pack products of any length. This machine can handle any kind of film by simply using some additional optional welding systems.

Polyolefin PE, Polypropylene, Barrier Films. The machine has three belts to achieve considerable film saving. Automatic product length calculation. CAM Packing machines can be equipped with different types of infeed and outfeed conveyors: flighted conveyors, conveyors with pushers, intralox, etc...; pushers, feeders (shuttle or rotary), stackers, shrink tunnels and many other accessories to form a complete line.

SPECIFIC FEATURES

The CAM Side Seal Machine is equipped with a transversal sealing bar that moves vertically and descends when the product arrives in order to cut and seal the bag in the front and back sides. Thanks to continuous side sealing there are no limits in products' length.


Transversal sealing bar width up to 1200 mm, product's height up to 40 cm. Speed calculated with A4 format up to 3000-3500 pcs/h.

Wrapping and shrinking solutions: standard wrapping and bagging, shrink wrapping, bag with "Euro hole or handle" systems that add a hole or handles to the bag in order to carry or hang the products easily, easy opening. "Modied atmosphere system"- MAP: to pack in protected atmosphere with Barrier Film, Polypropylene. Re-usable bag and resealable bag system.




TECHNICAL SPECIFICATION

Code	400	500	600	800	1100	500 ECO
Sealing Dimension	500 mm	500 mm	600 mm	800 mm	1200 mm	500 mm
Max. products width	420 mm	420 mm	520 mm	720 mm	1020 mm	420 mm
Max. products length	unlimited	unlimited	unlimited	unlimited	unlimited	unlimited
Max. products height	150 mm	200 mm optional up to 400	200 mm optional up to 400	200 mm optional up to 400	200 mm optional up to 400	200 mm
Film width	650 mm	650 mm	750 mm	950 mm	1200 mm	650 mm
Film roll diameter	350 mm	350 mm	350 mm	350 mm	350 mm	350 mm
Working height	900+/- 50	900+/- 50	900+/- 50	900+/- 50	900+/- 50	900+/- 50
Machine size LxWxH (mm)	1715x1300x1500	2300x1300x1500	2300x1400x1500	2600x2000x1650	2900x2500x1550	2300x1300x1500
Weight	700 Kg	800 Kg	900 Kg	1000 Kg	1100 Kg	900 Kg
Speed	45 p/min	75 p/min	75 p/min	65 p/min	60 p/min	50 p/min

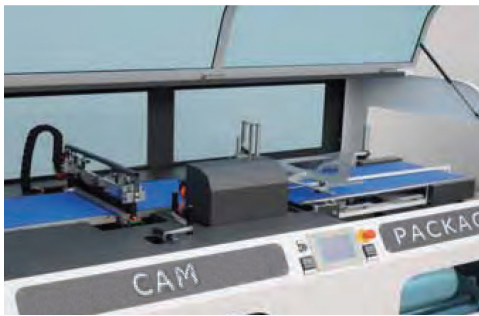

Side sealing machine: Flexibility and film saving

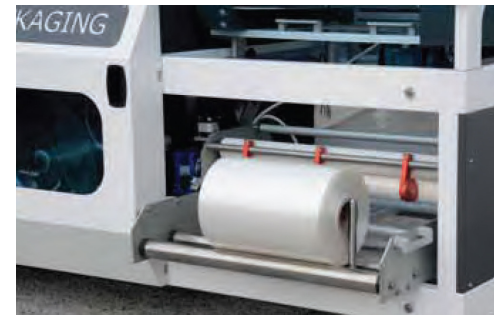

Film dispenser unit and film wind up unit both in front of the machine easy to be reached.
Sliding door.