## **NEW CLASS III LED BEACONS**

We are excited to announce the release of our new Value LED Beacons!

#### NEW VALUE-CHECK™ LED BEACONS



The new Value-Check™ Class III LED Beacons are designed to provide reliable performance and exceptional value for lighter duty applications. These lights feature an easy twist-on, UV-stabilized polycarbonate dome which encases a 26-light LED circuit that delivers bright visibility.

Value-Check™ LED Beacons meet SAE J845 Class III requirements and include a flange mount with three predrilled holes for permanent mounting, enhanced ferrite magnets for temporary mounting, and a 15 ft tangle-free straight cord with an on/off switch on the power plug for easy light control.

### MEETS SAE J845 CLASS III REQUIREMENTS.

	ECONOMY LED SPECIFICATIONS
Lens Color	Amber or Green
Operating Voltage	12 Volts, DC
Amps	.05 Amps @ 12 Volts, DC
Flash Pattern	1 Flash Pattern
Flashes Per Minute (FPM)	270 Pulse Flashes
Lumen Output	83
LED Count	26
Base Diameter	5.1 Inches
Overall Height	3.75 Inches
Mounting	Flange mount includes three pre-drilled holes for permanent mount, enhanced ferrite magnets, and 15 ft straight cord with an on/off switch on the power plug
Approval	Meets SAE J845 Class III
Temperature Range	-60° F to 140° F (-50° C to 60° C)
Warranty	6 Month No Hassle Warranty



- Ideal for use in light duty applications
- Includes 26 LEDs for increased visibility
- Easy twist-on dome made from durable, UV-stabilized polycarbonate
- Base made from ABS plastic
- Flange mount base includes three pre-drilled holes for permanent mounting, enhanced ferrite magnets for temporary mounting, and a 15 ft tangle-free straight cord with an on/off switch on the power plug
- Power cord switch allows user to easily turn light on or off without leaving driver seat

VER:VC-LED 11/1




# NEW CLASS III LED BEACONS

We are excited to announce the release of our new Value LED Beacons!

### ADVANTAGES OF VALUE-CHECK™ LED BEACONS



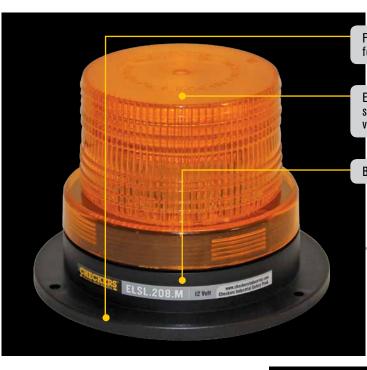


Flange base with three pre-drilled holes for permanent mounting


Easy twist-on dome made from UVstabilized polycarbonate for increased visibility

Base made from ABS plastic

Enhanced Ferrite magnets for stable holding power

15 ft. tangle-free straight cord with on/off switch on the power plug

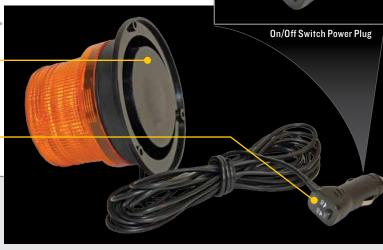



EL.SL.208.M*	LED Beacon Class III	83	5.1 in. (13.0 cm)	3.75 in. (9.6 cm)	Flange mount includes three pre-drilled holes for permanent mount, enhanced ferrite
				,	magnets, and 15 ft tangle-free straight cord with on/off switch on the power plug

<sup>\*</sup> Specify Lens Color after Model Number: A = Amber, G = Green

VER:VC-LED 11/13



### Dedicated to saving lives and protecting assets