


PRODUCT HIGHLIGHTS



CABLE GLANDS

For Hazardous Areas

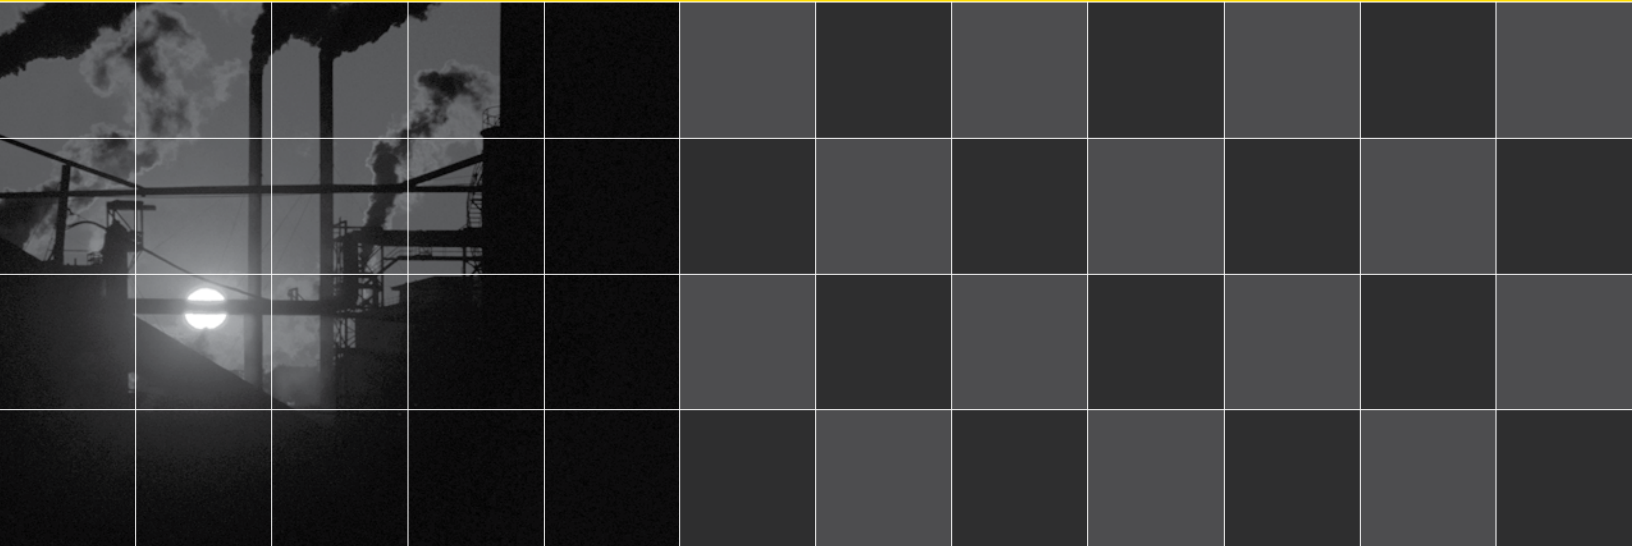

TPC WIRE & CABLE CORP.
EXPECT HIGH PERFORMANCE®



Cable Glands for Hazardous Areas

TPC Wire & Cable Corp. cable glands offer protection and relief, extending the life of your cable. We offer a full product family of cable glands in aluminum, nylon or stainless – with or without strain relief. Specialty cable glands include heat and temperature resistant glands and EMI shielded glands. We take pride in being one of the top cable glands manufacturers and our customers benefit from our dedication.


Hazardous location glands from TPC Wire & Cable Corp. are designed for non-armored cables. They are dual-certified for both Ex-d and Ex-e environments between -60°C to 105°C (-76°F to 221°F) and hazardous areas Zone 1, Zone 2, Zone 20, Zone 21, Zone 22 and NEC Class I / Division 2 and Class II / Division 1 or Division 2, where durability and quality is a must.

Available Sizes: M16, M20, M25, M32, M40, M50, M63, M75 and M90. NPT 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 2 1/2" and 3".

Applications & Environments

Oil & Gas Production, Refineries, Oilfield Service Companies, The Petroleum Industry, Energy/Coal, Process Industry, Paint Manufacturing, Chemical Industries, Pharmaceutical, Waste, Wood Processing, Agriculture, Metal, Food Processing, Recycling, Motion Control, Construction, Textile, Marine, Industrial Manufacturing Sector


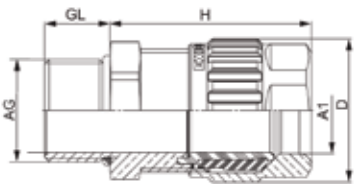
Ratings & Approvals

- **CSA/cUS** 
- **IECEX:** Dual Certified Ex-d/Ex-e
Ex-e = Increased Safety Rating
Ex-d = Combustible Environment Rating
- **NEC Class I / Division 2; Class II / Division 1 or Division 2**


- **ABS**
- **DNV**
- **Lloyd**
- **Inmetro**
- **PCT GOST**



Ordering Information (Call for pricing & availability)

BRASS CABLE GLANDS — For Hazardous Locations						
				FITTINGS: RAW BRASS SEALS: SILICONE O-RINGS: SILICONE HALOGEN AND PHOSPHOROUS-FREE OPERATING TEMPERATURE: -60°C TO 105°C (-76°F TO 221°F)		
PART NO.	THREAD TYPE & SIZE (AG)	BODY LENGTH (H)	OUTER DIAMETER (D)	THREAD LENGTH (GL)	CABLE RANGE 1 (A1)	WRENCH FLAT
HL09NK-BRASS	3/8" NPT	1.56" (39.7 mm)	1.06" (27 mm)	0.63" (16 mm)	0.24 – 0.47" (6 – 12 mm)	0.87" (22 mm)
HL13NK-BRASS	1/2" NPT	1.44" (36.5 mm)	1.14" (29 mm)	0.63" (16 mm)	0.24 – 0.47" (6 – 12 mm)	0.94" (24 mm)
HL13NM-BRASS	1/2" NPT	1.44" (36.5 mm)	1.06" (27 mm)	0.79" (20 mm)	0.35 – 0.63" (9 – 16 mm)	0.87 / 0.94" (22/24 mm)
HL21NK-BRASS	3/4" NPT	1.87" (47.5 mm)	1.38" (35 mm)	0.81" (20.5 mm)	0.49 – 0.81" (12.5 – 20.5 mm)	1.18" (30 mm)
HL29NK-BRASS	1" NPT	1.88" (47.8 mm)	1.65" (42 mm)	0.98" (25 mm)	0.67 – 1.02" (16.9 – 26 mm)	1.42" (36 mm)
HL29LK-BRASS	1 1/4" NPT	2.01" (51.1 mm)	2.05" (52 mm)	1.02" (26 mm)	0.87 – 1.29" (22 – 33 mm)	1.81" (46 mm)
HL36NK-BRASS	1 1/2" NPT	2.24" (56.8 mm)	2.52" (64 mm)	1.04" (26.5 mm)	1.10 – 1.61" (28 – 41 mm)	2.17" (55 mm)
HL50NK-BRASS	2" NPT	2.57" (65.4 mm)	2.87" (73 mm)	1.06" (27 mm)	1.57 – 2.07" (40 – 52.6 mm)	2.56" (65 mm)
HL52NK-BRASS	2 1/2" NPT	2.77" (70.3 mm)	3.54" (90 mm)	1.57" (40 mm)	2.01 – 2.40" (51 – 61 mm)	3.15" (80 mm)
HL30NK-BRASS	3" NPT	3.00" (76.2 mm)	4.21" (107 mm)	1.63" (41.5 mm)	2.44 – 3.07" (62 – 78 mm)	3.74" (95 mm)
HL16MK-BRASS	M16 x 1.5	1.40" (35.6 mm)	1.06" (27 mm)	0.63" (16 mm)	0.24 – 0.47" (6 – 12 mm)	0.87" (22 mm)
HL20MK-BRASS	M20 x 1.5	1.40" (35.6 mm)	1.06" (27 mm)	0.63" (16 mm)	0.24 – 0.47" (6 – 12 mm)	0.87" (22 mm)
HL20MM-BRASS	M20 x 1.5	1.56" (39.7 mm)	1.14" (29 mm)	0.63" (16 mm)	0.35 – 0.63" (9 – 16 mm)	0.94" (24 mm)
HL25MK-BRASS	M25 x 1.5	1.87" (47.5 mm)	1.38" (35 mm)	0.63" (16 mm)	0.49 – 0.81" (12.5 – 20.5 mm)	1.18" (30 mm)
HL32MK-BRASS	M32 x 1.5	1.88" (47.8 mm)	1.65" (42 mm)	0.63" (16 mm)	0.67 – 1.02" (16.9 – 26 mm)	1.81" (46 mm)
HL40MK-BRASS	M40 x 1.5	2.01" (51.1 mm)	2.05" (52 mm)	0.63" (16 mm)	0.87 – 1.30" (22 – 33 mm)	1.81" (46 mm)
HL50MK-BRASS	M50 x 1.5	2.24" (56.8 mm)	2.52" (64 mm)	0.63" (16 mm)	1.10 – 1.61" (28 – 41 mm)	2.17" (55 mm)
HL63MK-BRASS	M63 x 1.5	2.57" (65.4 mm)	2.87" (73 mm)	0.63" (16 mm)	1.57 – 2.07" (40 – 52.6 mm)	2.60" (65 mm)
HL75MK-BRASS	M75 x 1.5	2.77" (70.3 mm)	3.54" (90 mm)	0.63" (16 mm)	2.01 – 2.57" (51 – 65.3 mm)	3.15" (80 mm)
HL90MK-BRASS	M90 x 1.5	3.00" (76.2 mm)	4.21" (107 mm)	0.79" (20 mm)	2.44 – 3.07" (62 – 78 mm)	3.74" (95 mm)

STAINLESS STEEL CABLE GLANDS — *For Hazardous Locations*

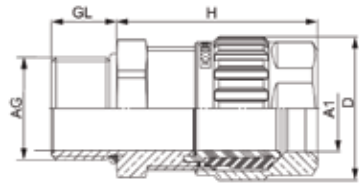

FITTINGS: STAINLESS STEEL

SEALS: SILICONE

O-RINGS: SILICONE

HALOGEN AND PHOSPHOROUS-FREE

OPERATING TEMPERATURE: -60°C TO 105°C (-76°F TO 221°F)

PART NO.	THREAD TYPE & SIZE (AG)	BODY LENGTH (H)	OUTER DIAMETER (D)	THREAD LENGTH (GL)	CABLE RANGE 1 (A1)	WRENCH FLAT
HL09NK-STEEL	3/8" NPT	1.56" (39.7 mm)	1.06" (27 mm)	0.63" (16 mm)	0.24 – 0.47" (6 – 12 mm)	0.87" (22 mm)
HL13NK-STEEL	1/2" NPT	1.44" (36.5 mm)	1.14" (29 mm)	0.63" (16 mm)	0.24 – 0.47" (6 – 12 mm)	0.94" (24 mm)
HL13NM-STEEL	1/2" NPT	1.44" (36.5 mm)	1.06" (27 mm)	0.79" (20 mm)	0.35 – 0.63" (9 – 16 mm)	0.87 / 0.94" (22/24 mm)
HL21NK-STEEL	3/4" NPT	1.87" (47.5 mm)	1.38" (35 mm)	0.81" (20.5 mm)	0.49 – 0.81" (12.5 – 20.5 mm)	1.18" (30 mm)
HL29NK-STEEL	1" NPT	1.88" (47.8 mm)	1.65" (42 mm)	0.98" (25 mm)	0.67 – 1.02" (16.9 – 26 mm)	1.42" (36 mm)
HL29LK-STEEL	1 1/4" NPT	2.01" (51.1 mm)	2.05" (52 mm)	1.02" (26 mm)	0.87 – 1.29" (22 – 33 mm)	1.81" (46 mm)
HL36NK-STEEL	1 1/2" NPT	2.24" (56.8 mm)	2.52" (64 mm)	1.04" (26.5 mm)	1.10 – 1.61" (28 – 41 mm)	2.17" (55 mm)
HL50NK-STEEL	2" NPT	2.57" (65.4 mm)	2.87" (73 mm)	1.06" (27 mm)	1.57 – 2.07" (40 – 52.6 mm)	2.56" (65 mm)
HL52NK-STEEL	2 1/2" NPT	2.77" (70.3 mm)	3.54" (90 mm)	1.57" (40 mm)	2.01 – 2.40" (51 – 61 mm)	3.15" (80 mm)
HL30NK-STEEL	3" NPT	3.00" (76.2 mm)	4.21" (107 mm)	1.63" (41.5 mm)	2.44 – 3.07" (62 – 78 mm)	3.74" (95 mm)
HL16MK-STEEL	M16 x 1.5	1.40" (35.6 mm)	1.06" (27 mm)	0.63" (16 mm)	0.24 – 0.47" (6 – 12 mm)	0.87" (22 mm)
HL20MK-STEEL	M20 x 1.5	1.40" (35.6 mm)	1.06" (27 mm)	0.63" (16 mm)	0.24 – 0.47" (6 – 12 mm)	0.87" (22 mm)
HL20MM-STEEL	M20 x 1.5	1.56" (39.7 mm)	1.14" (29 mm)	0.63" (16 mm)	0.35 – 0.63" (9 – 16 mm)	0.94" (24 mm)
HL25MK-STEEL	M25 x 1.5	1.87" (47.5 mm)	1.38" (35 mm)	0.63" (16 mm)	0.49 – 0.81" (12.5 – 20.5 mm)	1.18" (30 mm)
HL32MK-STEEL	M32 x 1.5	1.88" (47.8 mm)	1.65" (42 mm)	0.63" (16 mm)	0.67 – 1.02" (16.9 – 26 mm)	1.81" (46 mm)
HL40MK-STEEL	M40 x 1.5	2.01" (51.1 mm)	2.05" (52 mm)	0.63" (16 mm)	0.87 – 1.30" (22 – 33 mm)	1.81" (46 mm)
HL50MK-STEEL	M50 x 1.5	2.24" (56.8 mm)	2.52" (64 mm)	0.63" (16 mm)	1.10 – 1.61" (28 – 41 mm)	2.17" (55 mm)
HL63MK-STEEL	M63 x 1.5	2.57" (65.4 mm)	2.87" (73 mm)	0.63" (16 mm)	1.57 – 2.07" (40 – 52.6 mm)	2.60" (65 mm)
HL75MK-STEEL	M75 x 1.5	2.77" (70.3 mm)	3.54" (90 mm)	0.63" (16 mm)	2.01 – 2.57" (51 – 65.3 mm)	3.15" (80 mm)
HL90MK-STEEL	M90 x 1.5	3.00" (76.2 mm)	4.21" (107 mm)	0.79" (20 mm)	2.44 – 3.07" (62 – 78 mm)	3.74" (95 mm)



TPC WIRE & CABLE CORP.
EXPECT HIGH PERFORMANCE®



HOFFMAN PRODUCTS
A TPC WIRE & CABLE CORP. BRAND

TPC WIRE & CABLE CORP. HEADQUARTERS 9600 VALLEY VIEW ROAD, MACEDONIA, OHIO 44056
216-525-4320 • TOLL FREE 800-645-2014 • FAX 866-896-3017 • SALES@HOFFMANPRODUCTS.COM
WWW.TPCWIRE.COM/PRODUCTS/WIRE-AND-CABLE-ACCESSORIES/ELECTRICAL-COMPONENTS

WARRANTY AND DISCLAIMER: Seller makes no warranties, express or implied, with respect to this product, and seller disclaims any implied warranties of merchantability or fitness for any particular purpose. Further, seller will not be responsible for any consequential, incidental or indirect damages (including, but not limited to, any loss of profit) from any cause whatsoever.

TPC1302 (02/14) PRINTED IN U.S.A. ©Copyright 2014 by Hoffman Products, A TPC Wire & Cable Corp. Brand. All rights reserved. No portion of this publication, whether in whole or in part, can be reproduced without the express written consent of TPC Wire & Cable Corp.

