



Main Features

- Intel® Celeron® processor J1800
- HDMI and VGA Independent displays
- USB3.0 support
- WLAN support
- Compact and Fanless design

Product Overview

Powered by Intel® Celeron® processor J1800, NDiS B324 can handle very rich multimedia contents. With Intel® Celeron® processor low power consumption feature, NDiS B324 supports display output by HDMI and VGA ports. NDiS B324 is ideal as entry level digital signage player for advertising, hospitality and brand promotion application.

Specifications

CPU Support

- Intel® Celeron® J1800 2.41GHz onboard

Chipset

- Intel® BayTrail-D

Graphics

- Intel® HD Graphics

Main Memory

- 1 x 204-pin SO-DIMM socket, Supports DDR3L 1333MHz non-ECC, un-buffered memory up to 4G

I/O Interface-Front

- 1 x USB2.0
- 1 x USB3.0
- 1 x COM PORT

I/O Interface-Rear

- 19V DC Power in
- 1 x VGA
- 1 x HDMI
- 2 x USB2.0
- 1 x RJ45 with LEDs for 10/100/1000Mbps Ethernet
- 1 x Audio-out
- 1 x Mic-in

Storage

- 1 x 2.5" SATA HDD Bay

Dimensions

- 180 x 150 x 25mm

Power Supply

- 1 x External 65W AC/DC power adapter

Expansion

- 1 x Mini-PCIe slot (Half-size)

Environment

- Operating temperature : 0°C to 40°C
- Storage temperature : -20°C to 80°C
- Humidity : 10 to 90% (non-condensing)


Certification

- CE approval
- FCC Class A

Operating System

- Win7/WES7/Win8/WE8S/Linux

Dimension Drawing

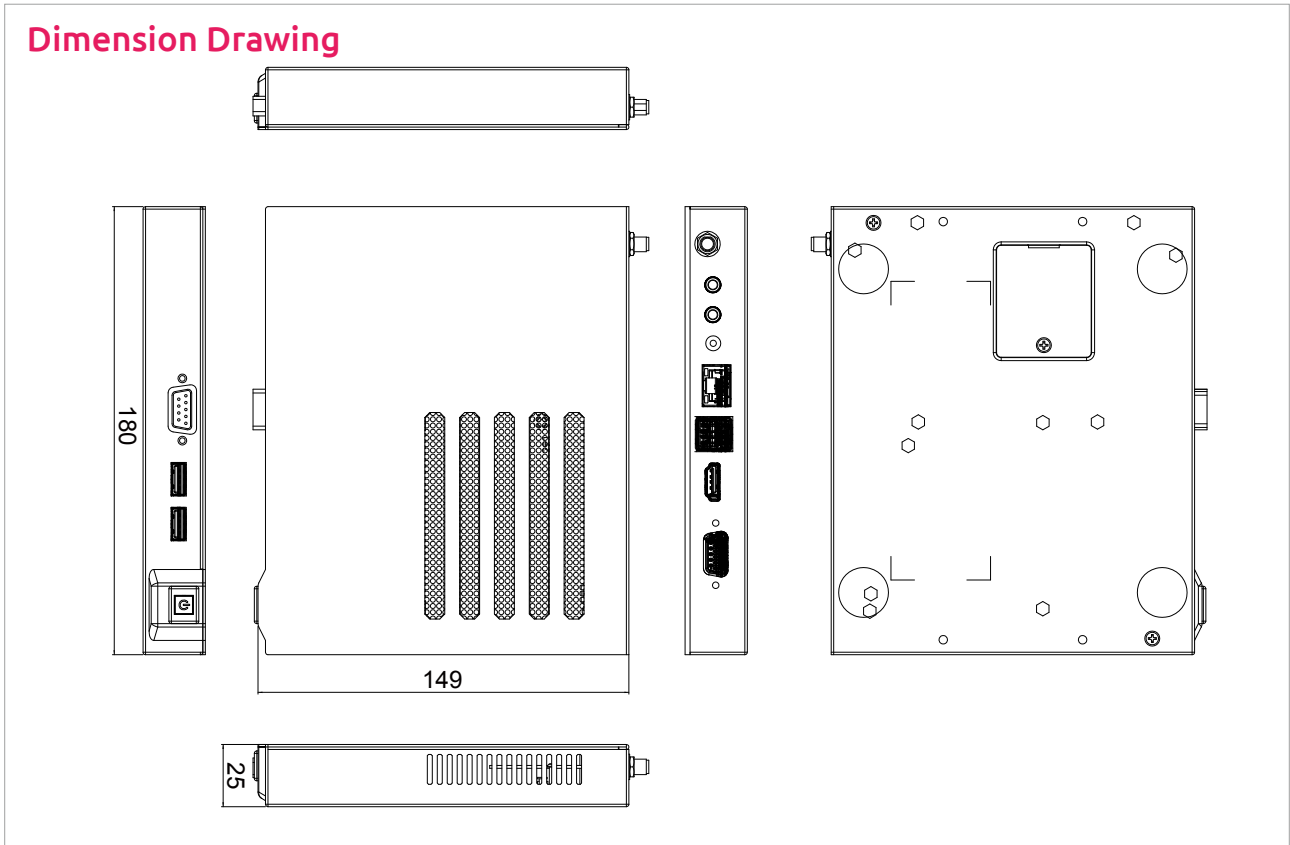

Ordering Information

- **NDiS B324 (P/N : TBD)**
Intel® Celeron® J1800 2.41GHz