



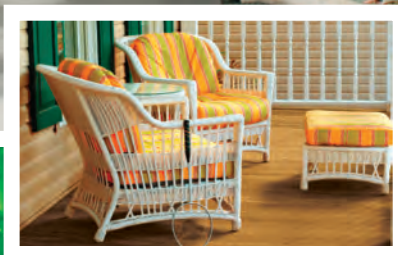

NyloPorch®

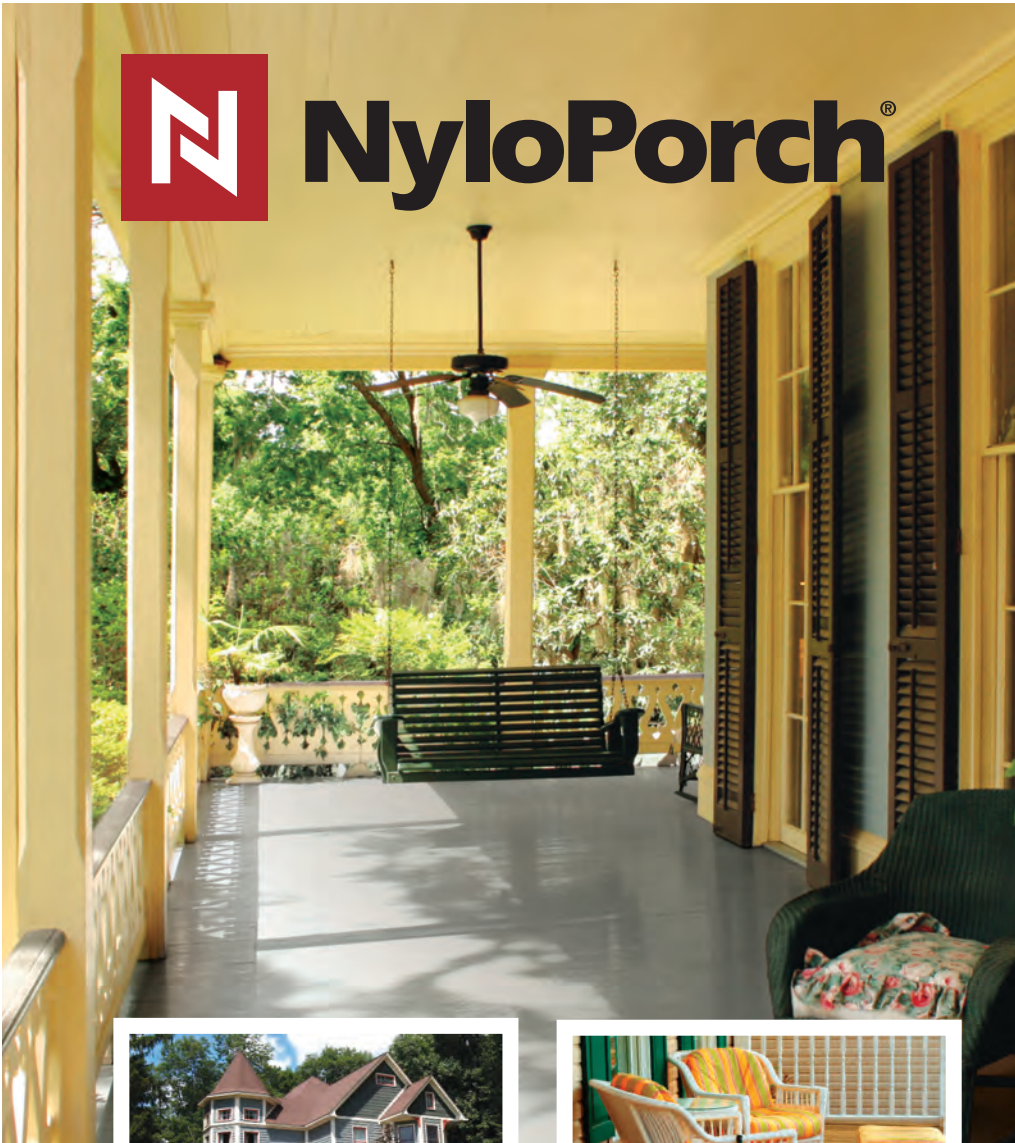

NyloPorch: Surround your home with lasting beauty

Containing no wood or PVC, NyloPorch is made with recycled carpet fiber for incredibly durable and eco-friendly flooring that extends the comfort of indoors to your porch.

Features:

- Impervious to water, mold, mildew and termites
- Traditional 3-1/8" face and contemporary 5-1/8" face options
- Strong, lightweight, easy-to-use
- No splitting or cupping
- Stain resistant for easier maintenance
- UV protected
- Strength and rigidity enable joist spans up to 16" O.C.
- Best Expansion and Contraction rating of all composites
- Available in four popular colors: Saddle Rose, Mountain Mocha, Desert Spice and Coastal Mist
- A proprietary embossing process creates a natural looking, unique wood-like grain on every board

Specifications:

- Size 15/16" x 3-1/8 face or 5-1/8" face
- Available in standard 12' and 16' lengths
- Matching Deck Fascia available in 1/2" x 7-1/4" and 11-1/4" x 12'

No Wood. No PVC. No Worries.

Overview

NyloPorch is a natural product extension of popular NyloDeck in a tongue and groove porch board. Eco-friendly NyloPorch is made using 100 percent recycled carpet fiber for durable and strong porch flooring that looks stunning. Containing no wood or PVC, NyloPorch is resistant to moisture, mold, mildew and termites. Its exceptional moisture resistance means NyloPorch alleviates concerns of splitting or cupping that can occur with wood.

Select NyloPorch in a traditional 3-1/8" face or a wider 5-1/8" profile for a more contemporary feel. NyloPorch possesses the same outstanding attributes of NyloDeck and has undergone rigorous testing, all to ensure a long-lasting, great-looking product that is completely unique, yet priced competitively.

NyloPorch delivers the look of a natural wood with minimal maintenance. Its proprietary three-dimensional embossing process creates a beautiful finish to each board in a variety of colors that complement any décor.

Test Results

Mold Resistance	ASTM D 3274: 10 rating
Fungal Resistance	ASTM D 1413: No decay
Termite Resistance	AWPA E1-97: 10 rating
Screw Retention	ASTM D 1037: 747lbf
Span Rating	16" on center
Coefficient of Friction	ASTM F 1679: 0.72 Dry/ 0.68 Wet
Coefficient of Thermal Expansion	ASTM D 696: 0.64 x 10 ⁻⁵ in/in/°F (Lowest expansion rate of all composite products)
Flame Spread	ASTM E84: Class C
Average Weight per LF	0.9 #/LF for 3-1/8" and 1.5#/LF for 5-1/8"

Warranty for peace of mind

Residential

Twenty-Five (25) Year Limited Residential Warranty Coverage
 Twenty-Five (25) Year Limited Residential Fade & Stain Warranty

Commercial

Ten (10) Year Limited Commercial Warranty Coverage
 Ten (10) Year Limited Commercial Fade & Stain Warranty

Installation


Lightweight and easy to carry, NyloPorch installs like a builder's dream. NyloPorch can be installed using stainless steel screws or barbed T nails. Unlike natural wood, NyloPorch is impervious to moisture and does not require gaps between the boards. NyloPorch can be installed with spans up to 16" on center. Due to greater coverage per square foot, the available 5-1/8" face of NyloPorch translates into more than a 30 percent reduction in time, labor and fasteners.

Installation benefits of NyloPorch


- Does not splinter, warp, peel or pit
- Install using stainless steel screws or barbed T nails

Colors: Natural beauty with unparalleled strength


With its authentic wood looks, rich tones and variegated grains, NyloPorch creates an outdoor living space that conveys artisan craftsmanship and invites comfort, all with minimal maintenance and exceptional performance. Just as in nature, no two pieces of NyloPorch look exactly the same. NyloPorch uses a proprietary three-dimensional embossing process that creates a beautiful finish in a variety of colors that complement any porch style, from traditional to contemporary.




Saddle Rose



Mountain Mocha



Desert Spice



Coastal Mist



Special Order:
Newport White or Harbor Gray

FOLLOW US

