

QUALITY TOOLS THAT GO TO WORK WITH YOU®



HUMM•VAC® VACUUM PUMPS



UNIWELD®
PRODUCTS, INC.
FT. LAUDERDALE
FL 33312 U.S.A.
www.uniweld.com



RESIDENTIAL AND COMMERCIAL HUMM•VAC[®] VACUUM PUMPS

The all-new Uniweld exclusive HUMM•VAC pumps: HVP 6CFM (yellow) and its two bigger brothers, HVP 8CFM (red) and HVP 12CFM (black) remove moisture and dehydrate a system quickly and efficiently. The rugged tough chassis, powerful, quiet running 110/220V, 50/60 Hz motors, lighter weight and ergonomically designed features make these pumps the #1 choice to go to work with you.

- COOL NEW STYLING
- WIDE SUREFOOTED CHASSIS
- LIGHTWEIGHT



- SLANT BACK BALANCED HANDLE
- GAS BALLAST
- DUAL VOLTAGE 110V/220V, 50/60 Hz
- FACTORY RATED TO 15 MICRONS



HVP12


HVP8

HVP6



- DEEP VACUUM PULL
- INTAKE FITTINGS WITH TETHERED CAPS AND CHECK VALVE
- UNIWELD MANIFOLD AND HOSES TEAM UP WITH HUMM•VAC PUMPS

U.S. PAT. #D0518068

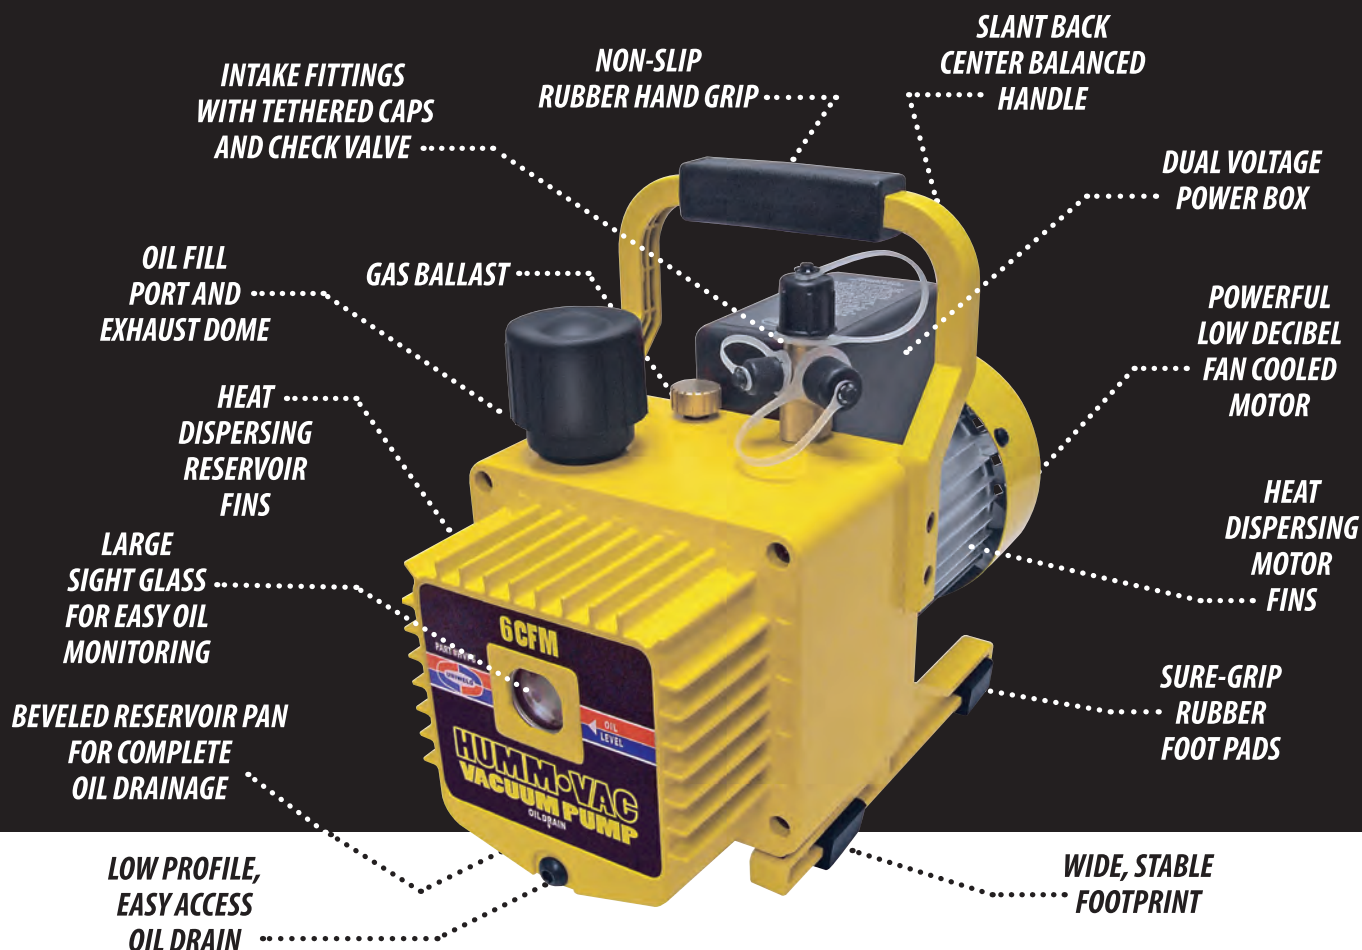

Pump Specifications	HVP6	HVP8	HVP12	UVP1.5
Free Air Displacement	6.0 CFM, 170 liter/min.	8.0 CFM, 226 liter/min.	12.0 CFM 340 liter/min.	1.5 CFM, 40.5 liter/min.
Number of Stages	2-Stage Rotary Vane	2-Stage Rotary Vane	2-Stage Rotary Vane	2-Stage Rotary Vane
Factory Micron Rating	15 Microns	15 Microns	15 Microns	38 Microns
Intake Fittings	1/4", 3/8" Male Flare and 1/2" Acme	1/4", 3/8" and 1/2" Male Flare	1/4", 3/8" and 1/2" Male Flare	1/4" Male Flare & 1/2" Acme
Thermal Overload Protection	1/2 HP	3/4 HP	3/4 HP	1/4 HP
Voltage	110/220V - 50/60Hz	110/220V - 50/60Hz	110/220V - 50/60Hz	†[see below]
Oil Capacity	1 Quart (946 ml)	31.3 Ounces (925 ml)	27.7 Ounces (820 ml)	4.7 Ounces (140 ml)
Power Cord	72" (1.83m)	72" (1.83m)	72" (1.83m)	66" (1.68m)
Dimensions	14.50" x 6.875" x 10.75" 36.83 cm x 17.46 cm x 27.30 cm	15.0" x 6.875" x 10.75" 38.1 cm x 17.46 cm x 27.3 cm	15.0" x 6.875" x 10.75" 38.1 cm x 17.46 cm x 27.3 cm	10.23" x 3.50" x 6.40" 26 cm x 9 cm x 16.5 cm
Weight	26 Lbs. (11.80 kg)	34 Lbs. (15.42 kg)	35 Lbs. (15.88 kg)	9.9 Lbs. (4.5 Kg)
Shipping Weight	30 Lbs. (13.60 kg)	38 Lbs. (17.24 kg)	39 Lbs. (17.70 kg)	14 Lbs. (6.3 Kg)
Color	Yellow	Red	Black	Black

**USE ONLY
PREMIUM UNIWELD
VACUUM PUMP OIL**

42005 Quart
(.946 liter) 12 per case

42006 Gallon
(3.78 liters) 6 per case



† UVP1.5-110 [110V-50/60 Hz]

† UVP1.5-220 [220V-50/60 Hz]



UNIWELD PRODUCTS, INC.

2850 Ravenswood Road, Fort Lauderdale, FL 33312

Customer Service: 800.323.2111 • 954.584.2000 • Fax: 954.587.0109

www.uniweld.com • info@uniweld.com



UVP1.5