


# Anaconda

## EBX Single Board Computer

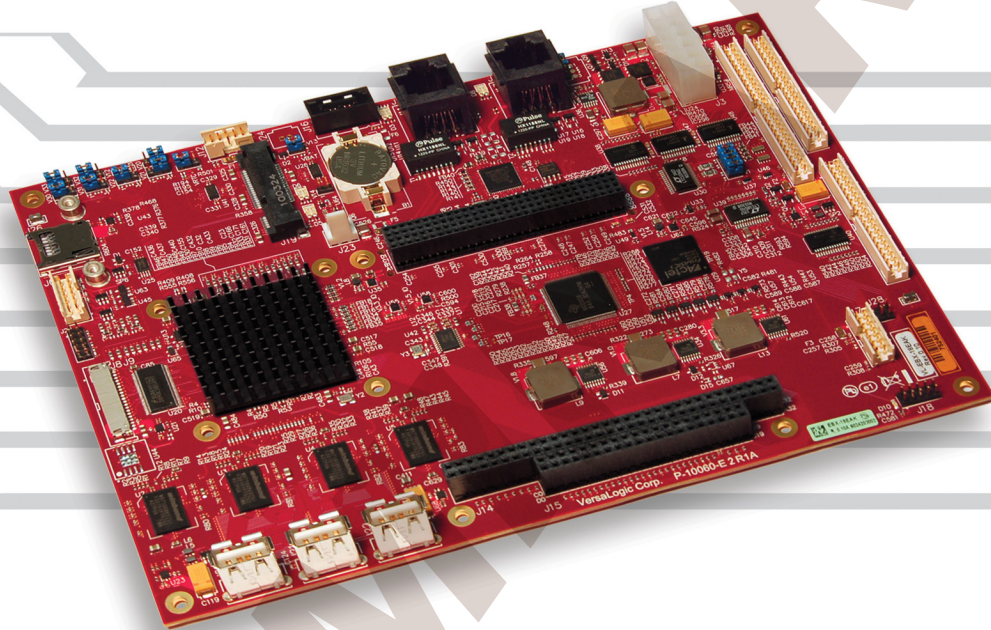

### Overview

The Anaconda is a low power embedded computer designed on a standard EBX form factor. It is powered by a DMP Vortex86DX2 processor that enables the entire board to use less than 5.5W (typ.). Several I/O interfaces, multiple expansions buses, and thermal management options provide system designers with flexibility and lower overall system cost.

Anaconda was designed with no moving parts, soldered-on RAM, and tested so it can withstand extreme temperatures, high-impact, and vibration. This Single Board Computer is an ideal choice for applications that require high quality, low-power, and long product life.

As with all VersaLogic products, the Anaconda is backed by a five-year warranty, 5+ year production life guarantee, and expert US-based technical support.

### Highlights **PRELIMINARY**


- Industrial temp. (-40° to +85°C) versions
- Shock & vibration per MIL-STD-202G
- EBX™ form factor
- Low power draw
- Fanless Operation
- DMP Vortex CPU
- Up to 2 GB soldered-on RAM
- PC/104-Plus expansion
- Dual 10/100 Ethernet
- Mini PCIe/mSATA socket
- VGA and LVDS video
- USB 2.0 ports (5 host ports)
- Serial I/O (RS-232/422/485)
- SATA port
- Digital I/O (32 lines)
- Analog Input (8 chan.)
- VersaAPI software support

## Features **PRELIMINARY**

- 1 DMP Vortex86DX2 32-bit Processor**  
Vortex86DX2 x86 low power processor with integrated I/O and 2D graphics engine.
- 2 Video Output**  
LVDS video output for flat panel displays. Standard analog VGA output. Simultaneous output from both ports.
- 3 Network Support**  
Dual Ethernet interfaces, autodetect 10BaseT / 100BaseTX with network boot capability.
- 4 RAM**  
Up to 2 GB soldered-on memory.
- 5 SATA**  
One SATA 1.5 Gb/s port supports high-capacity storage (solid-state drives or rotating media).
- 6 Device I/O**  
Five USB 2.0 ports support keyboard, mouse, and other devices (**6a**). Two RS-232/422/485 and two RS-232 serial ports, two 8254 timer/counters, 3 PWM outputs with tachometer inputs, and audio support (**6b**).
- 7 Analog + Digital I/O**  
On-board data acquisition support. Eight analog inputs (**7a**) and thirty-two digital I/O lines (**7b**).
- 8 MicroSD Socket**  
Supports removable microSD card solid-state drives.
- 9 Mini PCIe/mSATA Socket**  
Supports Wi-Fi modems, Ethernet, Analog I/O, Serial ports, GPS, MIL-STD-1553, Ethernet, solid-state mSATA drives, and other plug-in devices.

- 10 SPX Expansion**  
Add low cost analog, digital, and CANbus modules.
- 11 PC/104 Expansion**  
Industry-standard PC/104-Plus expansion site.
- Industrial Temperature Versions**  
-40° to +85°C operation for harsh environments.

- MIL-STD-202G**  
Qualified for high shock and vibration environments.
- Software Support**  
Compatible with a variety of popular x86 operating systems including Windows, Windows Embedded, and Linux. Includes VersaAPI software support for onboard I/O devices.

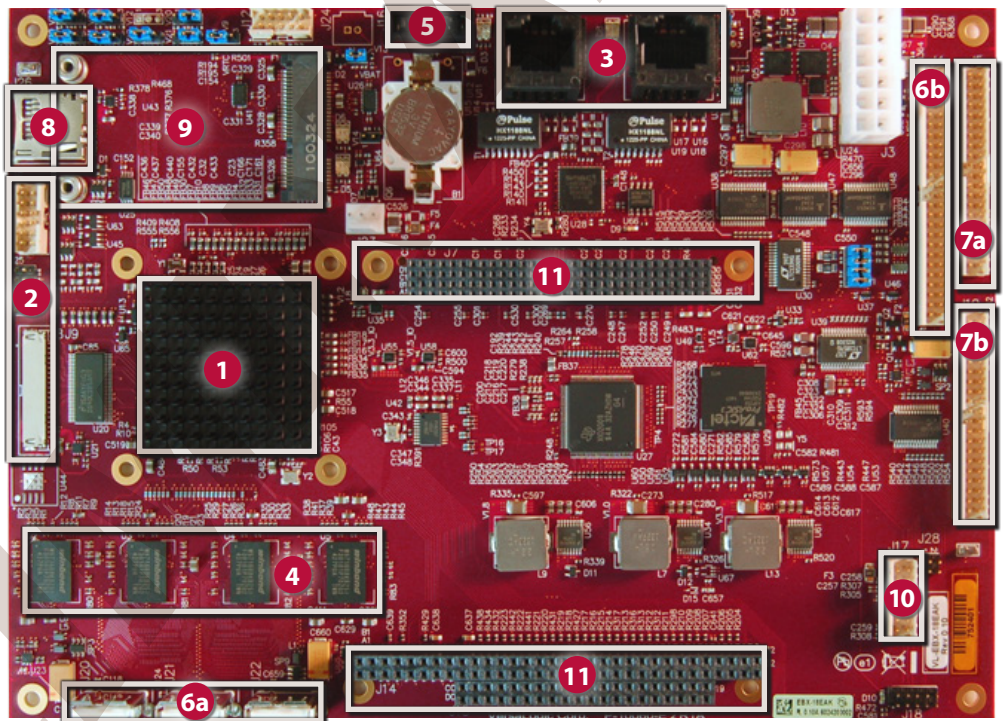

## Tailor Anaconda to Your Exact Requirements

Customization options are available in quantities as low as 100 pieces.

- Conformal Coating
- Custom Cabling
- Connector & I/O Changes
- Custom Testing
- Custom Labeling
- BGA Underfill
- BIOS Modifications
- Software and Drivers
- Revision Locks
- Custom Screening
- Application-Specific Testing
- And more –

### Specifications **PRELIMINARY**

<b>General</b>				
<b>Board Size</b>	EBX standard: 5.75" x 8" (146 mm x 203 mm)			
<b>Processor</b>	DMP Vortex86DX2 32-bit			
<b>Input Voltage</b>	12V nominal (wide input 9 to 15V) or 5V +/- 5%. Jumper selectable.			
<b>ESTIMATED Power Requirements</b>	<i>Model</i>	<i>Idle</i>	<i>Typical</i>	<i>Max.</i>
	VL-EBX-18SAK	5.3W	5.5W	5.8W
	VL-EBX-18SBK	5.3W	5.6W	5.9W
	VL-EBX-18SCK	5.3W	6.0W	6.7W
	VL-EBX-18EAK	5.0W	5.3W	5.7W
	VL-EBX-18EBK	5.0W	5.4W	5.8W
	VL-EBX-18ECK	5.0W	5.8W	6.6W
<b>System Reset &amp; Hardware Monitors</b>	All voltage rails monitored. Watchdog timer with programmable timeout. CPU temperature and fan speed monitoring. Push-button reset.			
<b>Stackable Bus</b>	PC/104-Plus expansion site			
<b>Manufacturing Standards</b>	Standard	IPC-A-610 Class 2 modified		
	Special Order	IPC-A-610 Class 3 modified		
<b>RoHS</b>	Compliant			

<b>Environmental</b>		
<b>Operating Temperature</b>	0° to +60°C or -40° to +85°C <i>See Ordering Information for Specific Models</i>	
<b>Storage Temperature</b>	-40° to +85°C	
<b>Altitude</b>	Operating *	To 4,570m (15,000 ft.)
	Storage	To 12,000m (40,000 ft.)
<b>Airflow Requirements</b>	<i>Temp. Range</i>	<i>Airflow</i>
	Standard 0° to +60°C	125 Linear Feet per Minute (0.5 Linear Meters per Second)
	Extended -40° to +85°C	125 Linear Feet per Minute (0.5 Linear Meters per Second)
<b>Thermal Shock</b>	5°C/min. over operating temperature	
<b>Humidity</b>	Less than 95%, noncondensing	
<b>Vibration, Sinusoidal Sweep</b> □	MIL-STD-202G, Method 204, Modified Condition A: 2g constant acceleration from 5 to 500 Hz, 20 min. per axis	
<b>Vibration, Random</b> □	MIL-STD-202G, Method 214A, Condition A: 5.35g rms, 5 min. per axis	
<b>Mechanical Shock</b> □	MIL-STD-202G, Method 213B, Condition G: 20g half-sine, 11 ms duration per axis	

<b>Memory</b>	
<b>System RAM</b>	Up to 2 GB DDR2 soldered-on memory.

‡ TVS protected port (enhanced ESD protection)

# Power pins are overload protected

† Tachometer inputs can be used to time the interval between events or as feedback to PWM outputs.

\* For extended altitude information contact VersaLogic Sales Dept.

□ MIL-STD-202G shock and vibrate levels were used to illustrate the overall ruggedness of this product. Certification at higher levels or different types of shock or vibration methods per the specific requirements of the application is available. Contact a VersaLogic Sales Engineer for further information.

Specifications are subject to change without notification. EBX and PC/104-Plus are trademarks of the PC/104 Consortium. All other trademarks are the property of their respective owners.

<b>Video</b>	
<b>General</b>	Integrated video controller.
<b>VRAM</b>	Up to 64 MB shared DRAM frame buffer.
<b>Desktop Display Interface ‡</b>	Standard analog output (VGA). Up to 1920 x 1440 (60 Hz). 32-bit. 2 mm IDC connector.
<b>OEM Flat Panel Interface #</b>	LVDS interface. 18/24-bit. Up to 1024 x 768 (60 Hz). 8 bpp. CMOS-selectable TFT panel types. Support for FPD power control.

<b>Mass Storage</b>	
<b>Rotating Drives / Flash / Solid-State Drives</b>	One SATA 1.5 Gb/s port with latching connector. One Mini PCIe / mSATA socket (SATA signaling, bootable) One microSD socket. Supports up to 32 GB. Bootable.

<b>Network Interface</b>	
<b>Ethernet ‡</b>	Two autodetect 10BaseT/100BaseTX ports with RJ45 connectors.

<b>Device I/O</b>	
<b>USB # ‡</b>	Five USB 2.0 host ports.
<b>COM 1 / 2 ‡</b>	RS-232 16C550 compatible.
<b>COM 3 / 4 ‡</b>	RS-232/422/485 selectable. 16C550 compatible.
<b>Analog Input</b>	Eight channels. 12-bit. Single-ended. 100 Ksps. 0 to +4.096V
<b>PWM Outputs and Tachometer Inputs †</b>	3 PWM (pulse width modulation) outputs and tachometer inputs.
<b>Digital I/O</b>	Thirty-two TTL I/O lines 3.3V. Independently configurable.
<b>Audio</b>	Optional. Use VL-ADR-01 audio interface.
<b>Counter/Timers</b>	Two 8254 16-bit timers
<b>AT Peripherals #</b>	Keyboard and PS/2 mouse port.

<b>Other I/O</b>	
<b>Mini PCIe / mSATA Socket</b>	Full-size Mini PCIe / mSATA socket. Supports Wi-Fi modems, GPS receivers, solid state mSATA drives, and other plug-in modules.
<b>SPX Interface</b>	Supports low cost analog and digital SPX modules.

<b>Software</b>	
<b>BIOS</b>	AMI BIOS. Support for USB keyboard/mouse and USB boot.
<b>VersaAPI</b>	VersaLogic Application Programming Interface to support on-board I/O devices.
<b>Sleep Mode</b>	None
<b>Operating Systems</b>	Compatible with most x86 operating systems including Windows, Windows Embedded, and Linux.

## Ordering Information **PRELIMINARY**

Model	Nominal Speed	Memory Size	Operating Temp. †
VL-EBX-18SAK	1.0 GHz	512 MB	0° to +60°C
VL-EBX-18SBK *	1.0 GHz	1 GB	0° to +60°C
VL-EBX-18SCK	1.0 GHz	2 GB	0° to +60°C
VL-EBX-18EAK *	800 MHz	512 MB	-40° to +85°C
VL-EBX-18EBK	800 MHz	1 GB	-40° to +85°C
VL-EBX-18ECK	800 MHz	2 GB	-40° to +85°C

\* Special Order Product – Contact VersaLogic Sales for assistance.

† Derate -1.1°C per 305m (1,000 ft.) above 2,300m (7,500 ft.)


Other configurations are possible. Please contact VersaLogic Sales at (503) 747-2261 to discuss requirements!

## Accessories **PRELIMINARY**

Part Number	Description
<b>Cable Kit</b>	
VL-CKR-ANACON	Development Cable kit for EBX-18. Includes: VL-CBR-5009, 4004 (x2), 2022, 1201, 0702, and HDW-105 (x2)
VL-CBR-5009	Primary Breakout Cable: 18" 2mm Latching 50-pin to 50-pin
VL-CBR-4004	12" 2mm 40 pin to 40 pin IDC cable
VL-CBR-2022	12" ATX to 10-pin power adapter cable
VL-CBR-1201	12-pin to 15-pin VGA
VL-CBR-0702	20" SATA cable – rugged latching
VL-HDW-105	0.6" standoff package (metric thread)
<b>Cables</b>	
VL-CBR-0401	6.25" ATX to SATA power cable
VL-CBR-1203	12" ATX 12V power adapter cable (12-pins)
VL-CBR-1401	6" 14-pin cable assembly for (2) SPX modules
VL-CBR-1402	12" 14-pin cable assembly for (4) SPX modules
VL-CBR-2014	LVDS to VGA Adapter board
VL-CBR-2015	20" 24-bit LVDS flat panel cable (Hirose)
VL-CBR-2016	20" 18-bit LVDS flat panel cable (JAE)
<b>Audio</b>	
VL-ADR-01	USB to Audio Adapter
<b>Solid-State Storage (flash memory)</b>	
VL-F41-xxxx	microSD card (SDIO), SLC, industrial temp.
<b>Drives</b>	
VL-HDS35-xxx	3.5" hard drive (SATA)
<b>Hardware</b>	
VL-PS-ATX12-300A	Bench-top / development power supply
VL-HDW-106	0.6" standoffs, English thread (four per kit)
VL-HDW-108	Mini PCIe / mSATA hardware kit (metric thread) 2.5 mm
<b>Miscellaneous</b>	
VL-HDW-111	Half to Full Size Mini PCIe Adapter kit. Metal adapter and screws (2)
VL-HDW-203	PC/104 extractor tool (metal)

## Expansion Modules

Part Number	Description	Form Factor
<b>Network</b>		
VL-MPEe-W2E	Wi-Fi 802.11 a/b/g/n	Mini PCIe
VL-MPEe-E3E	Gigabit Ethernet adapter	Mini PCIe
<b>Serial I/O</b>		
VL-MPEe-U2E	Quad serial plus twelve GPIOs	Mini PCIe
<b>Analog &amp; Digital I/O</b>		
VL-MPEe-A1E	Analog input (12-bit resolution)	Mini PCIe
VL-MPEe-A2E	Analog input (16-bit resolution)	Mini PCIe
VL-SPX-1	Analog Input Module 8-Channels	SPX
VL-SPX-2	Digital I/O Module 16-lines	SPX
VL-SPX-4	Analog Output Module 4-channels 12-bit	SPX
VL-SPX-5	Solid State Switch Module 8-channel	SPX
<b>GPS</b>		
VL-MPEu-G2E	GPS receiver	Mini PCIe
<b>Video</b>		
VL-EPm-V7E	Video Expansion Module: VGA and LVDS	PC/104-Plus
VL-MPEe-V5E	VGA and LVDS Interface	Mini PCIe
<b>Memory</b>		
VL-MPEu-K1Exx	AES Encrypted Memory (8 or 32 GB)	Mini PCIe
<b>Solid-State Storage (flash memory)</b>		
VL-MPEs-F1Exx	mSATA module (4/16/32 GB) (SATA)	Mini PCIe
<b>Adapters</b>		
VL-MPEs-S3E	SATA adapter	Mini PCIe

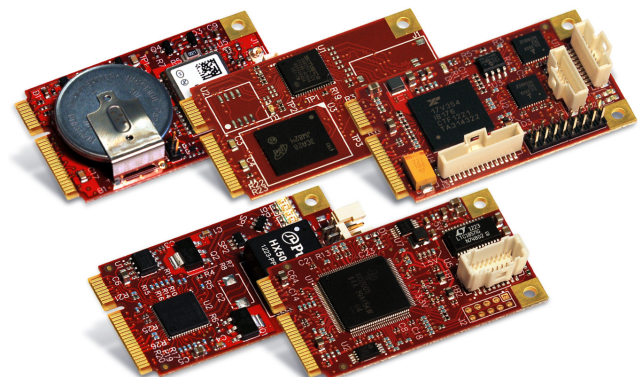

Mini PCIe Modules

## Take the Risk out of Embedded Computing

Whether it's selecting the optimum solution for your application, lending expertise during development, or on-time delivery of defect-free products, VersaLogic is here to make sure your project goes smoothly from initial concept through the extended life of your program. Contact us today to learn more.

ISO 9001:2008 Certified 

