

Item No. _____

8000i

SOFT SERVE MACHINE

The Argosy 8000i challenges the status quo and sets the pace of the soft serve industry through cutting-edge, proprietary, refrigeration technology. Expertly engineered, the 8000i is manufactured to the highest exacting standards resulting in a simple elegance and slim design that puts the 8000i at the epicenter of soft serve innovation.

Features

- The 8000i's Smart Touch Control™ (STC) is the soft serve industry's first LCD touch screen display giving operators full operational and diagnostic control without requiring technical assistance
- World's only InfiniteBond™ Evaporator System provides superior product freezing performance, and improves start-up, recovery and draw-time
- Industry's first soft serve machine that utilizes scroll compressor technology with up to 4x the lifespan of industry standard reciprocating compressors
- Best-in-class production output with the lowest rated energy consumption
- Quad-Zone Temperature Control™ (QZT) allows operators to set independent temperature points for each hopper and each freezing cylinder, delivering perfect consistency regardless of soft serve product type
- Optimal-sized hoppers and expanded freezing cylinders minimize product waste while allowing locations to handle peak-hour rushes
- 360 degree serviceability and leak-free access valves allow for easy and quick servicing
- Simplified design reduces the machine's footprint, decreases maintenance costs, and cuts down on the steps required to clean and assemble the machine
- Designed, engineered and manufactured in Orlando, FL USA



Custom, 2-Piece Graphics Kit Shown



Made in U.S.A



ADA Compliant


1.3 Printed in U.S.A



Corporate Headquarters
4225 SW 34th Street
Orlando, Florida 32811
USA

☎ 1.888.350.7643 -Toll Free
☎ 321.202.2683
✉ info@argosygroupintl.com
🌐 www.argosygroupintl.com

8000i Soft Serve Machine

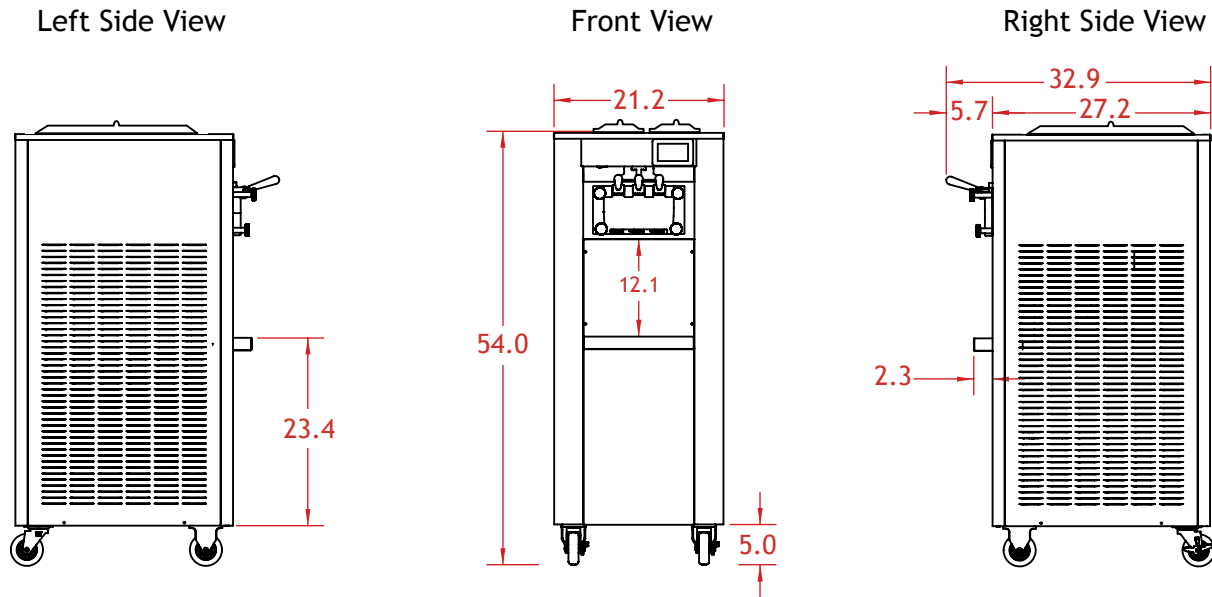

Measurements in inches.

Capacity	Qt.	L
Freezing Cylinder	2 x 4.0	2 x 3.79
Refrigerated Hopper	2 x 9.3	2 x 8.8

Weights	lbs	kgs
Net	400	181
Gross	450	204

Refrigeration	
R404A	1134g
Condenser Type	Air-Cooled

Electrical	
Voltage	208 - 230 v
Rated Input Power	2.76 kW
Hertz	60 Hz
Plug type	NEMA L6-30P
Phase	Single
Breaker Size	30A, Double Pole
Drive Motor	(2)- 1 Hp(750 W)

Specifications

Electrical

One dedicated 30A electrical circuit per unit is required with NEMA L6-30P receptacle.

Air Cooled

A minimum clearance of 3 inches is required on the right and left sides of the machine and 6 inches of clearance is required for the rear face of the machine. A minimum clearance is not required for the front face of the machine.

Options

- Custom, 1-Piece Graphics Kit
- Custom, 2-Piece Graphics Kit
- Custom, 5-Piece Graphics Kit
- Custom Control Display

Continuous product development may necessitate specification and/or design changes.

Printed in U.S.A



Corporate Headquarters
4225 SW 34th Street
Orlando, Florida 32811
USA

1.888.350.7643 -Toll Free
321.202.2683
info@argosygroupintl.com
www.argosygroupintl.com