

# PORTABLE GUARDRAIL



**LORGUARD**  
GUARDRAIL SAFETY


Diversified Fall Protection's OSHA compliant guardrail system, LORGUARD™, is a versatile, rooftop fall protection system that does not require attachment to your roof structure applications. LORGUARD™ is a free standing and non penetrating system, that can be used in both permanent and portable applications. As LORGUARD™ does not require drilling or special fasteners, our engineered, light-weight bases allow for fast and easy installation. LORGUARD™ is available in standard lengths of 6 foot, 8 foot, and 10 foot guardrail sections from our ecommerce website, [www.PortableGuardrail.com](http://www.PortableGuardrail.com).

 **DIVERSIFIED FALL  
PROTECTION**

LIFE MATTERS™

PRODUCT FLYER

# ROOFTOP FALL PROTECTION

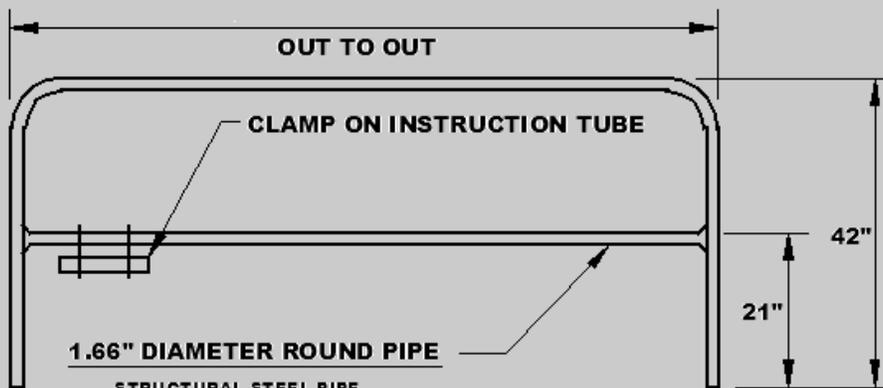

#### STRUCTURAL STEEL PIPE


- Strong & Rigid
- Precision Bent For Consistent Quality
- Smooth Corner Radii

#### POLYESTER POWDER COAT FINISH

- Durable
- Attractive Fade Resistant
- Scratch Resistant
- Color Options ("Safety Yellow" - Standard)

#### LIGHTWEIGHT

- 6'-0" Guard Rail: 34 lbs
- 8'-0" Guard Rail: 41 lbs
- 10'-0" Guard Rail: 48 lbs



#### LIGHTWEIGHT 59 LB BASE PLATE

##### DURABLE FINISH ON BASE

- Protective & Durable
- Attractive Fade Resistant

##### NON-SKID BASE

- Marine Quality
- Meets Military and Motor Vehicle Safety Standard Specs

Diversified Fall Protection's OSHA compliant guardrail system, LORGUARD™, is a versatile, rooftop fall protection system that does not require attachment to your roof structure applications. LORGUARD™ is a free standing system, that can be used in both permanent and portable applications. Diversified Fall Protection's OSHA compliant guardrail system, LORGUARD™, is used in a variety of applications:

- ROOFTOP
- HVAC
- ROOF HATCH
- SKYLIGHTS
- MEZZANINES
- ACCESS PLATFORMS AND WALKWAYS

#### BASEPLATE

Ease of use with a 59 pound baseplate



#### INSTALLATION

Simple installation sold as a kit or installation provided

#### SWING GATE OPTION

Strong, multi purpose, self closing steel-design swing gate that's reversibly fitted



#### OSHA COMPLIANT

Tested to withstand 200 pounds of force at the top rail (42 inches) and 150 pounds at the midrail (21 inches)



24400 Sperry Drive Cleveland, OH 44145  
Phone: (440) 348-9460 | Toll Free: (800) 504-4016



[www.FallProtect.com](http://www.FallProtect.com)  
[www.PortableGuardrail.com](http://www.PortableGuardrail.com)