



Intrinsically Safe Multi-Function Dual-Light™ Headlamp

This non-rechargeable multi-function Dual-Light™ headlamp is cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. This headlamp features a multi-position tilt head design and includes an elastic head strap with a non-slip lining and a heavy-duty rubber head strap for use on a hard hat. The dual top mounted switches provide user-selectable high or low-brightness spotlight, high or low-brightness floodlight operation and our exclusive Dual-Light design... the ability to turn on both the spotlight and the floodlight at the same time for maximum user safety and lighting versatility.

INTRINSICALLY SAFE

160 Lumens
Dual-Light™

115/60 Lumens
Spotlight

120/60 Lumens
Floodlight

Spot High Spot Low



Flood High Flood Low Dual



- cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present.

- Beam distance rated at 82 meters
- Dual brightness spotlight & floodlight plus Dual-Light™
- Engineered polymer housing



XPP-5454G

XPP 5454G

Intrinsically Safe Multi-Function Dual-Light™ Headlamp




XPP-5454G

High/low-brightness spotlight
Spotlight

High/low-brightness
and Dual-Light floodlight

Floodlight

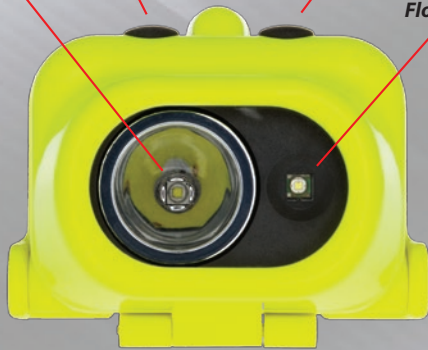

SPECIFICATIONS

- Lumens: high spotlight-115, low spotlight-60, high floodlight-120, low floodlight-60, dual-light-160
- Run-time: high spotlight-5 hrs, low spotlight-16.25 hrs, high floodlight-5.25 hrs, low floodlight-16.75 hrs, dual-light-3.5 hrs
- Beam distance: 82 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, height: 2.1in, depth: 1.8in, weight: 3.3oz

FEATURES

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight, high/low-brightness floodlight & Dual-Light™
- Focused spotlight beam for distance illumination
- Wide unfocused floodlight beam for close-up illumination
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty*

FL1 STANDARD	HIGH	LOW
	115 LUMENS	60 LUMENS
	5h	16h 15min
	82m	60m
	1668cd	882cd
	2m	
	1m	

SAFETY RATING

cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present.

Patent 7,738,229

INCLUDED

- Headlamp
- 3 Premium alkaline AAA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

Model **UPC 0 17398**

XPP-5454G 80427 1

*Limited Lifetime Warranty • Product is warranted to be free from defects in workmanship and materials for the original purchaser's lifetime. The Limited Lifetime Warranty includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two (2) years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.

Nightstick 5454 Headlamp



ID 4008947
INTRINSICALLY SAFE
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia IIC T3 Ga
CLASS II & III GRPS E-G T135C Intertek ITS 13 ATEX27928X
CLASS I ZONE 0 AEx ia IIC T3 Ga IECEx ETL 13.0045X
CLASS I ZONE 0 Ex ia IIC T3 Ga -20°C ≤ Tamb ≤ +40°C
Ⓢ II 1 G Ex ia IIC T3 Ga 1.5V/Cell AAA Alkaline

CE 0359

Conforms to:
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

Certified to:
CAN/CSA STD C22.2 No 157
CAN/CSA STD C22.2 No 60079-0
CAN/CSA STD C22.2 No 60079-11
CSA STD C22.2 No 25