



Main Features

- Intel® Pentium® processor N3700/Celeron® processor N3150 support (codename Braswell)
- System 1U size
- 4K2K Support (H.265)
- Max. 8GB RAM
- Dual display of HDMI & DVI-I
- Internal 3.5" SATA storage support
- mSATA support
- eSATA support

Product Overview

Equipped with Intel® Pentium® processor N3700/Celeron® processor N3150, the NViS 1410 features maximum 8GB DDR3L 1600 MHz memory, along with the integrated graphics controller, Intel® HD Graphic for large display applications and allows to have H.265 hardware decoding in ultra-high definition 4K resolution. In addition, NViS 1410 provides high quality digital recording, real-time display and supports a wide range of megapixel IP cameras. Moreover, NViS 1410 supports a wide variety of I/O configurations, including HDMI, DVI-I, two Intel® GbE ports, four USB 3.0, audio interfaces, one COM port and one eSATA.

Specifications

CPU

- Intel® Pentium® processor N3700, quad core, 1.6 GHz (up to 2.4 GHz)
- Intel® Celeron® processor N3150, quad core, 1.6 GHz (up to 2.08 GHz)

Memory

- Up to 8GB DDR3L 1600 MHz SDRAM in one SODIMM socket

I/O Interface-Front

- 1 x Power indicator LED
- 1 x HDD indicator LED

I/O Interface-Rear

- 2 x Gigabit Internet ports
- 4 x USB 3.0 ports
- 1 x HDMI
- 1 x DVI-I
- 1 X Audio con (Line-in/Line-out/MIC-in)
- 1 x Power on/off switch
- 1 x DC-In
- 1 x COM (RS232/422/485)
- 1 x eSATA

Storage

- 1 x 3.5" SATA hard drive bay (internal)
- 1 x mini PCIe slot, mSATA support

Power Input

- 120W power adapter with 24V DC input (power cord optional)


Dimensions

- 320mm(W) x 44mm(H) x 245mm(D)

Environment

- Operating temperature: 0°C to 40°C
- Storage temperature: -20°C to 75°C
- Relative humidity: 10% to 90% (non-condensing)

Dimension Drawing

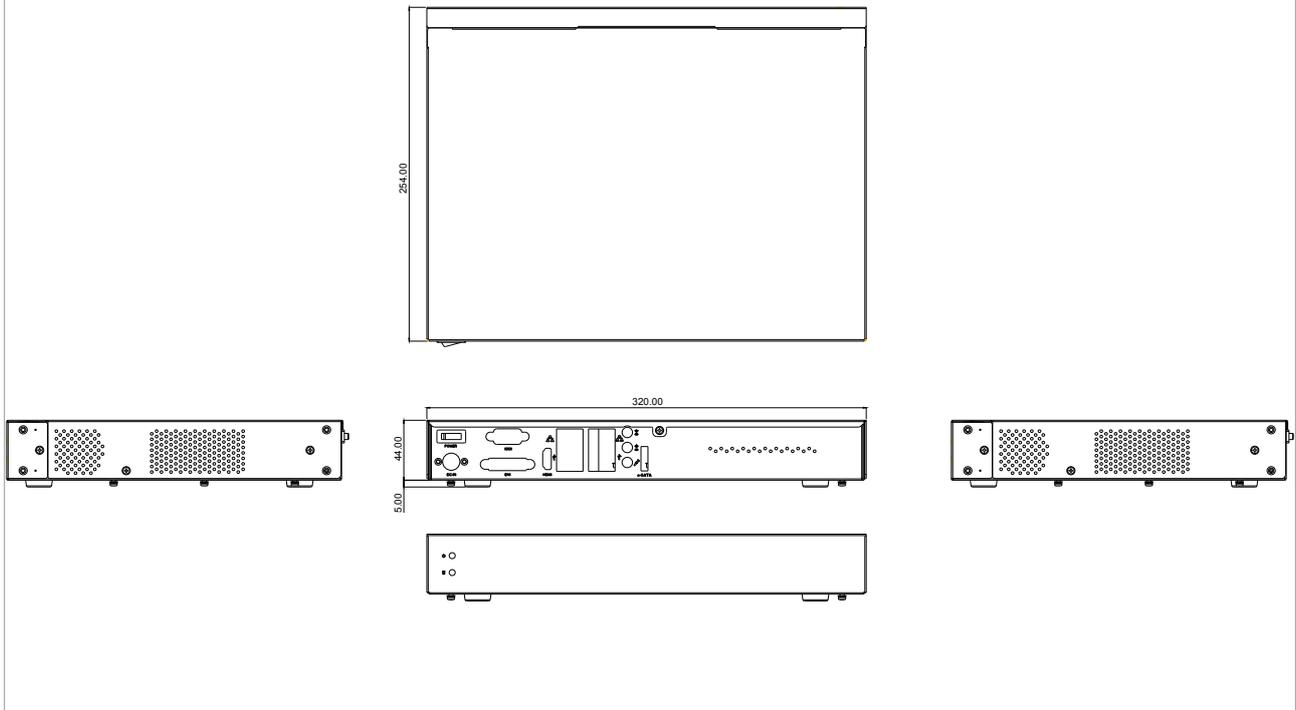

Ordering Information

- ◆ **NViS 1410 (P/N: TBC)**
Slim Type NVR with Intel® Pentium®/Celeron® Processors N3700
Product Family
- ◆ **NViS 1410C (P/N: TBC)**
Slim Type NVR with Intel® Pentium®/Celeron® Processors N3150
Product Family