

Four & Seven Port Super-Speed 3.0 USB Hubs

Models USH204 & USH207

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com



PRODUCT FEATURES

- USB 3.0 speeds up to 5 Gbps
- 900 mA downstream power on each port
- Heavy-duty metal case with DIN and panel mount options
- 15 KV ESD protection

Models USH204 and USH207, 4-port and 7-port industrial USB 3.0 hubs, offers a simple way to expand a system's current USB capability by providing additional external USB 3.0 ports from a single USB 3.0 host connection, with speeds up to 5 Gbps.

These rugged hubs provide reliability under almost any condition and can be securely mounted to most surfaces. Fully compliant with the SuperSpeed USB 3.0 Specification, these industrial USB hubs are backward compatible with USB 2.0 and 1.x Specifications for simultaneous support of older USB peripherals or even older systems without USB capabilities. USB 3.0 downstream powering supplies 900 mA to power connected peripherals. Includes a USB 3.0 Type A to Type B cable (2 m), DIN rail/wall mount kit and terminal block.

ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION
USH204	Industrial USB 3.0 4-port Hub
USH207	Industrial USB 3.0 7-port Hub


ACCESSORIES - sold separately

MDR-40-12 - Power Supply 40W, 12V, DIN Rail, Slim, Plastic

USB3AMB-3FT - USB 3.0 Cable, 0.91 m (3 ft.)

MECHANICAL DIAGRAM - USH207

Units = mm

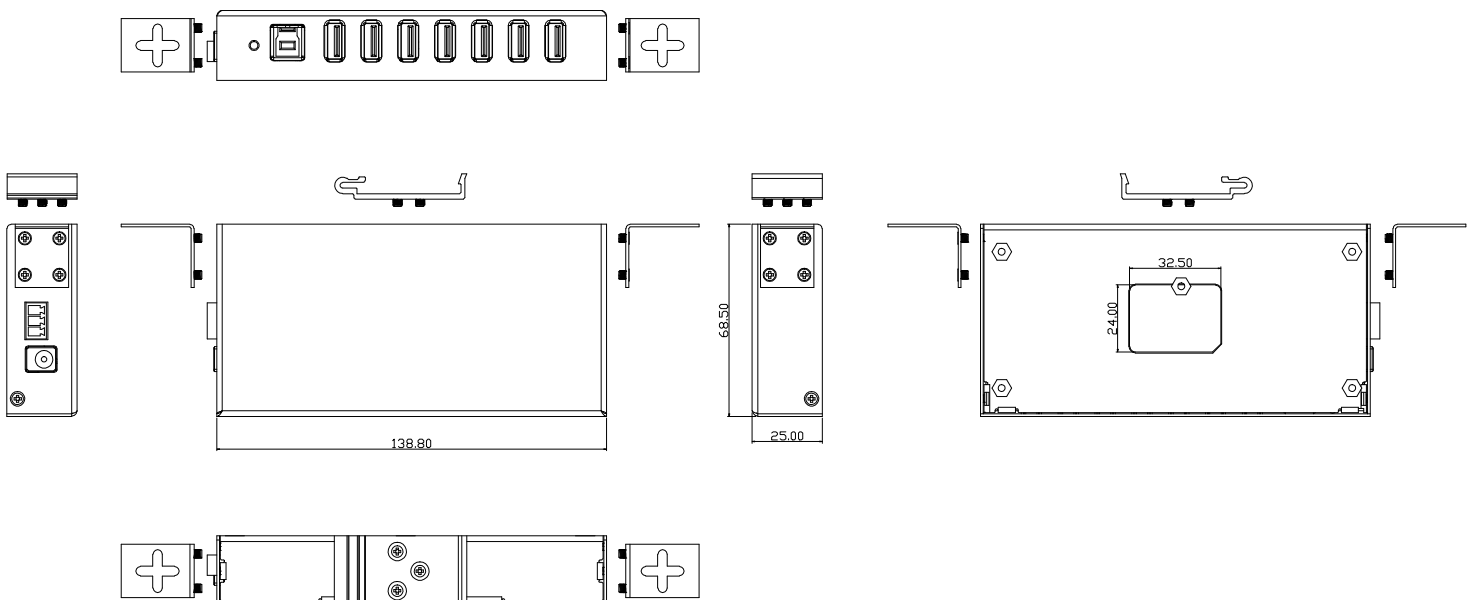

All product specifications are subject to change without notice.

USH204_USH207_3517ds

Four & Seven Port Super-Speed 3.0 USB Hubs

Models USH204 & USH207



SPECIFICATIONS

USB INTERFACE	
Standards	USB 3.0 (backward compatible with USB 2.0 and USB 1.1)
Upstream Port	(1) Type B
Downstream Ports	USH204: (4) Type A USH207: (7) Type A
Surge Protection	600W power input surge protection on each port
ESD Protection	15 kV Air
POWER	
Power Requirement	External power source (sold separately) Redundant 9 to 24 VDC terminal block input USH204: 24 W USH207: 36 W
Power Connector	3-pin terminal block or threaded barrel DC power jack
Downstream Power	900 mA per port
LED	Power LED indicator

MECHANICAL	
Dimensions	138.8W x 68.5D x 25.0H mm (5.47W x 2.7D x 0.98H inches)
Enclosure	Industrial-grade, metal case
Weight	USH204: 600 gm (1.32 lb) USH207: 620 gm (1.37 lb)
ENVIRONMENTAL	
Operating Temperature	0 to +40 °C (+32 to +104 °F)
Storage Temperature	-20 to +50 °C (+4 to +122 °F)
Operating Humidity	0 to 85% Non-condensing
APPROVALS/CERTIFICATIONS	
Emissions	FCC Class B, CE, RoHS
CE	EMC Directive 2004/108/EC EN 55022:2010 EN 55024:2010 EN 61000-3-2:2006+A1:2009+A2:2009 EN 61000-3-3:2008

MECHANICAL DIAGRAM - USH204

Units = mm

