

S H I P P I N G C O N T A I N E R S WITH DECK AND LID DESIGN

2019 PRODUCT CATALOG



SAFE, SECURE AND EFFICIENT CARGO SOLUTIONS www.cakeboxx-technologies.com

CAKEBOXX® CONTAINERS

WHAT'S IN THE BOXX?

Deck and Lid Design

The key feature of every CakeBoxx container is the unique two-piece deck and lid construction. In addition to making cargo loading and unloading a simpler and safer task, the deck and lid design seals and secures the container contents entirely, making unauthorized access and theft virtually impossible.



TrusDek®

All CakeBoxx containers, with their deck and lid design, are built with the extra-thick **TrusDek**. This specially engineered deck is designed to carry heavy, top and side-loaded machinery, break bulk and project cargo shipments that require extreme strength, hardware mounts or under-deck additions. All CakeBoxx decks can be handled fully loaded as a pallet without the lid installed.

Vertical Locking System™

The simple and efficient **Vertical Locking System** is another feature built into every CakeBoxx product. This easy-to-use twist lock feature secures and releases the lid and deck, and is a highly reliable, super strong advantage.

Tailored Perimeter Tie Down System (PTS™)

With up to 30 flush-mounted, heavy-duty D-Rings, CakeBoxx's tailored PTS provides a wide array of lashing options to address any cargo. This allows uniquely shaped or configured products to be safely secured, greatly reducing the chance of damage. The thickness of the TrusDek allows the floor to be customized with countersunk, threaded attachment points for a variety of anchor fittings or through-bolts allowing cargos to be secured in ways that ordinary containers cannot.







CAKEBOXX CARGOS

WHAT SHIPS IN A CAKEBOXX?

The short answer is that anything you would ship in a standard container will also ship in a CakeBoxx container. The difference comes with the massive time, cost and efficiency savings and advantages the two-piece CakeBoxx containers have over their standard counterparts.

CakeBoxx is perfect for loading high density, awkward shaped goods and cargos. These are easily top and side loaded with CakeBoxx containers - even cargo which can only otherwise be shipped as break bulk.

High-value and high-consequence goods with the greatest potential for theft. These include pharmaceuticals, tobacco products, alcohol, and electronics.

High-density, heavy cargos that do not need the full vertical capacity of standard containers such as I-beams, steel, scrap and heavy ores.

Long cargos that cannot be easily loaded into a standard container with doors. This would include pipe, timber and building materials.

Industrial equipment, machinery, heavy wheeled or tracked equipment and assemblies that are typically shipped in flat racks or require disassembly prior to being packed in a standard container.

Material typically shipped in drums or on pallets that due to their nature, cannot be stacked. This would include chemicals and petroleum products.

Military and defense materials such as ammunition and supply equipment.

Closed-loop supply chains where the shipper controls the movement of goods in both directions. These can be piece-parts to finish assembly, farm to processing or distribution plants and other scenarios.









SAFETY ACT DESIGNATION

ANTI-TERRORISM TECHNOLOGY

In 2018 the Office of SAFETY Act Implementation at the U.S. Department of Homeland Security congratulated CakeBoxx Technologies on receiving SAFETY Act liability and risk management protections for their innovative, high-security, 'deck and lid' design containers.

CakeBoxx Technologies' doorless container models are a Qualified Anti-Terrorism Technology (QATT) and are listed on the SAFETY Act's Approved Equipment List. The SAFETY Act 'Designated' mark can be used by CakeBoxx Technologies products as a seal of confidence from U.S. Government security experts that they are effective against terrorism.







We launched the CakeBoxx products to provide a secure option to confront the pervasive and growing container security threat. Our doorless design is an extremely effective deterrent to the most common risk scenarios. At the same time, we wanted to keep the design simple to facilitate ease of inspection and use. We made it strong to ensure longevity and reliability. This combination of attributes results in a very safe, highly secure and money-saving product with a strong return on investment for a very broad spectrum of users. There are more versions of the CakeBoxx design coming to serve more products and requirements.

DAINE EISOLD
PRESIDENT & CEO
CAKEBOXX TECHNOLOGIES



EXTRA THICK DECK - HIGH STRENGTH AND SECURITY FOR HEAVY CARGO

The TrusDek® Series is the latest CakeBoxx deck technology and comes as standard on all container types.

TrusDek is designed to carry heavy, top and side-loaded machinery, break bulk and project cargo shipments that require more deck strength and thickness for the mounting of hardware and plumbing or electrical connections below the surface of the deck. Built to last, TrusDek offers the strentgh and loading ease of the flat rack or open top design combined with the security of a completely enclosed and secure container.





Easy to Handle

All CakeBoxx containers feature the TrusDek deck design which locks to the lid, keeping cargo safe and secure during transport and storage. It conveniently loads like a flat-rack or open-top container and is handled by all standard container handling equipment and a wide variety of commercial lifting equipment.

The TrusDek's thickness also allows it to be used as a pallet after the lid is removed. The sturdy TrusDek deck can be used as a movable pallet, an equipment foundation or other useful applications while still supporting the full rated payload of the container.

Best of both worlds

CakeBoxx containers with TrusDek design offer the loading advantages of a flat rack with the protection and security of enclosed container.

Secure and reliable

The TrusDek series containers use the new Vertical Locking System (VLS) comprised of super-tough, easily-operated twist locks. This makes the lid extremely easy to place and remove while providing a very high level of reliability and maintainability.

More cargo space

The versatile VLS enables the TrusDek to be configured in two basic variations:

- Flat, open deck provides maximum footprint
- **Recessed deck** offers more vertical space while providing a secure fit for rolling stock or heavy equipment.

Pick your size

The TrusDek series ships with all CakeBoxx variants. All lengths, widths and heights are available from 20' half-height to 53' high cube.





TRUSDEK OPTIONS

Custom flooring materials

TrusDek is available with a variety of customer specified flooring materials including steel, environmentally friendly FRP or plywood.

Versatile Perimeter Tie Down System (PTS™)

Customer-defined lashing points with up to 30 flush-mounted, heavy-duty D-Rings provide a wide array of cargo lashing options. The thickness of the TrusDek deck allows the floor to be customized with countersunk, threaded attachment points for a variety of anchor fittings or through-bolts, allowing options to secure cargos in ways that ordinary, doored containers cannot.

Corner guides

Makes raising or lowering the lid easier.

Fork lift tubes or rings

Can be added to the lid for special cargo handling requirements.

Doors or access points

These are available on either or both ends and sides and are built to customer specifications.

Insulation

Can include state of the art vacuum panels to keep your temperature sensitive cargo conditioned from extreme temperature swings.

CUSTOM SOLUTIO

CAKEBOXX BUILT TO SPEC

The unique CakeBoxx deck and lid design makes it highly customizable. A wide range of options are available on each CakeBoxx model. In additon, CakeBoxx Technologies can work with you to design and build entirely bespoke custom solutions to meet unique requirements.













Custom Dimensions

CakeBoxx containers are available to order as standard in a number of length, width and height options. For cases where this does not meet your transport and storage needs, we can work with you to build an entirely bespoke CakeBoxx solution.

Insulation Packages

A variety of high performance insulation options are available.

Refrigeration

In addition to insulation options, CakeBoxx containers are also available as reefers where powered temperature control is neccesary.

Corner Guides

In order to eliminate potential for lid contact with cargo during loading and unloading operations, CakeBoxx products are available with corner guides to aid the securing of the container and to prevent cargo damage.

Lifting Tubes or Rings

For special cargo handling requirements, lifting tubes or rings can be added to the lid.

Doors and Viewing Ports

All CakeBoxx models are available with access and cargo doors or removable panels designed to customer specifications.

Custom Flooring

A variety of customer-specified flooring materials to precisely fit specific requirements for the deck are available. These include steel, FSC certified bamboo or OSB plywood, hardwood, or fiber reinforced plastic (FRP). CakeBoxx decks are available with flat or recessed floors.

Environmentally Friendly Paint

Paint options are available on request. This includes environmentally friendly water based paints.

LED Lighting

Where light in the CakeBoxx lid is a concern, internal LED lighting can be fitted.

CAKEBOXX 20'

INTEGRATING SEAMLESSLY

Dimensionally identical to a standard ISO container, the CakeBoxx 20' also has the same load capacities, making it the perfect choice for optimizing regular supply chain operations safely and efficiently.

The unique CakeBoxx deck and lid design seals and secures the container contents entirely, making unauthorized access and theft virtually impossible.

This CakeBoxx integrates seamlessly into all intermodal processes, including stacking, storage, terminal transfers and ship, rail and truck haulage. CakeBoxx 20' comes as standard in high cube 9'6" height. Other heights available on request.



CakeBoxx 20', flat floor model







SPECIFICATIONS

20'x8'x9'6" CakeBoxx High cube, flat floor model

External Dimensions

 Length
 Width
 Height

 6058 mm
 2438 mm
 2896 mm

 19' 10.5"
 8'
 9' 6"

Internal Dimensions

Length Width Height5770 mm 2152 mm 2369 mm
18' 11.2" 7' 1" 7' 9.2"

Load and Volume Capacity

Max Gross Weight Tare Weight Max Payload 30480 kgs 3450 kgs 27030 kgs

30480 kgs 3450 kgs 27030 kgs 67200 lbs 7610 lbs 59590 lbs

Internal Cubic Capacity Stacking Test Load

29.4 m³ 86400 kgs 1038 ft³ 190480 lbs

Lid Weight

1750 kgs 3859 lbs

- Unique deck and lid design
- ✓ 20' length
- Perimeter Tie Down System (PTS) customizable for securing even the most awkward shaped goods
- ✓ Simplified Vertical Locking System for reliability, ease of use and maintainability
- ✓ Insulated or non insulated
- Available with or without doors and access panels
- ✓ Steel or plywood floor
- ✓ Flat or recessed floor
- Corner guides, fork pockets in lid and other options available.

^{*}See separate **Custom Solutions** page for further options

^{**} Further specifications available on request.

CAKEBOXX 40'

INTEGRATING SEAMLESSLY

Dimensionally identical to a standard ISO container, the CakeBoxx 40' also has the same load capacities, making it the perfect choice for optimizing regular supply chain operations safely and efficiently.

The unique CakeBoxx deck and lid design seals and secures the container contents entirely, making unauthorized access and theft virtually impossible.

This CakeBoxx integrates seamlessly into all intermodal processes, including stacking, storage, terminal transfers and ship, rail and truck haulage. CakeBoxx 40' comes as standard in high cube 9'6" height. Other heights available on request.



CakeBoxx 40', flat floor model







SPECIFICATIONS

40'x8'x9'6" CakeBoxx High cube, flat floor model

Externai	ľD)imension:	S

Height	Width	Length
2896 mm	2438 mm	12192 mm
9′ 6″	8'	40′

Internal Dimensions

 Length
 Width
 Height

 11984 mm
 2232 mm
 2210 mm

 39' 3.81"
 7' 3.87"
 7' 3.01"

Load and Volume Capacity

Max Gross Weight Tare Weight Max Payload

32000 kgs 7400 kgs 24600 kgs 70550 lbs 16310 lbs 54240 lbs

Internal Cubic Capacity Stacking Test Load

59.1 m³ 86400 kgs 2087 ft³ 190480 lbs

> Lid Weight 2400 kgs 5290 lbs

- Unique deck and lid design
- ✓ 40' length
- → 9'6" height as standard. Other heights available on request
- Perimeter Tie Down System (PTS) customizable for securing even the most awkward shaped goods
- → Simplified Vertical Locking System for reliability, ease of use and maintainability
- ✓ Insulated or non insulated
- Available with or without doors and access panels
- ✓ Steel or plywood floor
- ✓ Flat or recessed floor
- Corner guides, fork pockets in lid and other options available.

^{*}See separate **Custom Solutions** page for further options

^{**} Further specifications available on request.

SHORTBOXX

THE HALF HEIGHT CAKEBOXX

At half the height of a standard high cube container, the low profile ShortBoxx at 4'9" is ideal for high gross weight, low volume cargos such as steel, copper or aluminum ingots or long, unwieldy cargos which cannot be end-loaded in standard doored containers.

ShortBoxx is the perfect choice for liquid or granular cargos and chemicals shipped in tanks, drums, barrels or Intermediate Bulk Containers (IBCs) that need to be carefully secured and cannot be stacked two-high. These cargos can be safely secure and snug between the top of the lid and floor preventing them from any possible toppling or shifting in transit.

Two ShortBoxx containers can also be safely and efficiently stacked; maximizing product haulage potential but with the same footprint as a standard container. ShortBoxx comes as standard in 20' length. Other lengths available on request.









SPECIFICATIONS

20'x8'x4'9" ShortBoxx Half-height, flat floor model

	External	Dimension:	S
--	----------	------------	---

Length	Width	Height
6058 mm	2438 mm	1450 mm
19′ 10.5″	8'	4′ 9″

Internal Dimensions

 Length
 Width
 Height

 5770 mm
 2152 mm
 1022 mm

 18' 11.2"
 7' 1"
 3' 4.2"

Load and Volume Capacity

Max Gross Weight Tare Weight Max Payload

30480 kgs 2800 kgs 27680 kgs 67200 lbs 6180 lbs 61020 lbs

Internal Cubic Capacity Stacking Test Load

12.6 m³ 86400 kgs 444 ft³ 190480 lbs

Lid Weight 1100 kgs

2425 lbs

- ✓ Unique deck and lid design
- ✓ Half the height of a hi-cube container
- 20' length as standard, other lengths available on request
- → Perimeter Tie Down System (PTS) customizable for securing even the most awkward shaped goods
- Simplified Vertical Locking System for reliability, ease of use and maintainability
- Insulated or non insulated
- ✓ Steel or plywood floor
- ✓ Flat or recessed floor
- Corner guides, fork pockets in lid and other options available.

^{*}See separate **Custom Solutions** page for further options

^{**} Further specifications available on request.

BREAKBULKBOXX

NEW POSSIBILITIES FOR CONTAINERIZED CARGO

The high costs and risks involved with shipping break bulk cargo are driving manufacturers around the world to increasingly redesign their products and packaging to take advantage of containerized intermodal transportation. Still, many products cannot be loaded into standard containers due to their size, shape and weight.

CakeBoxx Technologies' two-piece containers allow containerized transport for many of these types of products with simple top and side loading and discharging operations. The BreakBulkBoxx line of CakeBoxx containers have been designed specifically to help break bulk shippers take advantage of the huge cost and operational benefits the everexpanding network of containerized transportation hubs have to offer.






- Reduced cost Container shipments cost less than break bulk per ton.
- *Increased efficiency* Top and side loading a container is faster than pierside stevedoring.
- More transport options, less waiting Container ships call more frequently than dry cargo ships.
- Fewer restrictions Eliminates the need to accumulate cargo and dry cargo ship minimums.
- Safer and more secure Containerized goods have fewer handling accidents, damage and thefts.
- Range of sizes CakeBoxx two-piece containers are available in full range of sizes from 20' to 53'.

CANDIDATE CARGOS:

- ✓ Machine assemblies
- Structural steel, pipe, re-bar
- Baled scrap
- Wheeled and tracked vehicles
- ✓ Coil, plate, sheet, ingots.

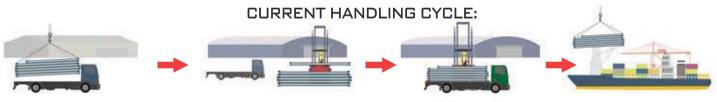

1. Cargo loaded onto flatbed truck at factory, taken to consolidation warehouse. 2. Cargo offloaded, consolidated and stored in warehouse awaiting shipment. 3. Cargo loaded onto flatbed truck and driven to port or terminal for loading. 4. Cargo loaded onto ship or railcar.

BREAKBULKBOXX™ HANDLING CYCLE



1. Cargo loaded onto CakeBoxx deck on truck at factory, CakeBoxx lid added and cargo taken directly to port or terminal for loading.



2. CakeBoxx container loaded onto ship or railcar.

BREAKBULK BOXX45' THE 45' BREAK BULK SOLUTION

The BreakBulkBoxx 45' fills the long-awaited gap between 40' and 53' containers. As part of CakeBoxx Technologies' BreakBulkBoxx range, it has been designed specifically to save costs for break bulk and project cargo shippers by providing a means to transport loads on container ships versus the slower, more costly break bulk and multi-purpose vessels.

The circular lightening holes in its deck (the lower portion of the two-piece container), are incorporated to reduce weight. The thoughtful design also includes dual gooseneck tunnels for versatile transportability and a new 'end locking system' for additional security and strength to complement its characteristic Vertical Locking System at the 40' intermediate position.



BreakBulkBoxx 45', flat floor model







SPECIFICATIONS

45'x8'x9'6" BreakBulkBoxx High cube, flat floor model

External	111000	ncionc
PXIPIIIII	1 111111	11 11 11 1
LALCITIAI		.1 1310113

Length	Width	Height
13716 mm	2438 mm	2896 mm
45′	8′	9′ 6″

Internal Dimensions

Height	Width	Length
2402 mm	1964 mm	13508 mm
7′ 10″	6′ 5″	44′ 3.8″

Load and Volume Capacity

Max Gross Weight Tare Weight Max Payload

32000 kgs 8200 kgs 23800 kgs 70550 lbs 18080 lbs 52470 lbs

Internal Cubic Capacity Stacking Test Load

63.7 m³ 57600 kgs 2249 ft³ 126980 lbs

Lid Weight

2660 kgs 5864 lbs

- ✓ Unique deck and lid design
- √ 45' length
- ✓ Dual gooseneck tunnels
- Perimeter Tie Down System (PTS) customizable for securing even the most awkward shaped goods
- Simplified Vertical Locking System for reliability, ease of use and maintainability
- → OSB plywod floor, other options available including FRP
- Corner guides, fork pockets in lid and other options available.

^{*} Further specifications available on request.

BREAKBULK BOXX 53'

THE 53' BREAK BULK SOLUTION

As the largest product in the CakeBoxx range, the BreakBulkBoxx 53' is perfect for transporting goods otherwise only movable as break bulk. It's WTP configuration is tailored to US intermodal transport handling equipment; making it perfect for moving cargos across road and rail.

The circular lightening holes in its deck (the lower portion of the two-piece container), are incorporated to reduce weight. The thoughtful design also includes dual gooseneck tunnels for versatile transportability and a new 'end locking system' for additional security and strength to complement its characteristic Vertical Locking System at the 40' intermediate position.



BreakBulkBoxx 53', flat foor model







SPECIFICATIONS

53'x8'6"x9'6" BreakBulkBoxx High cube, flat floor model

External Dimensions

 Length
 Width
 Height

 16154 mm
 2600 mm
 2896 mm

 53'
 8' 6"
 9' 6"

Internal Dimensions

Length Width Height15946 mm 2145 mm 2402 mm
52′ 3.7″ 7′ 7′ 10″

Load and Volume Capacity

Max Gross Weight Tare Weight Max Payload
32000 kgs 9800 kgs 22200 kgs

70550 lbs 21610 lbs 48940 lbs

Internal Cubic Capacity Stacking Test Load

82.1 m³ 57600 kgs 2899 ft³ 126980 lbs

Lid Weight

3180 kgs 7011 lbs

- ✓ Unique deck and lid design
- 9'6" height
- Dual gooseneck tunnels
- Perimeter Tie Down System (PTS) customizable for securing even the most awkward shaped goods
- Simplified Vertical Locking System for reliability, ease of use and maintainability
- OSB plywod floor, other options available including FRP
- Corner guides, fork pockets in lid and other options available.

^{*} Further specifications available on request.

CHASSISBOXX™

THE FLATBED CAKEBOXX

The CakeBoxx ChassisBoxx transforms a container chassis to a fully enclosed flatbed trailer for over the road use. When the deck and lid of the ChassisBoxx are installed on a standard container chassis it combines the practical elements of a flatbed trailer with the protective elements of a fully enclosed shipping container.

The deck is simply installed by fitting it to the existing twistlocks on any standard container chassis. Side or top load the cargo and secure it using the Perimeter Tie-down System, then install and lock down the ChassisBoxx lid. Cargo is protected from the elements, theft, vandalism, and general damage caused by uncovered transport – exactly in the same way as a typical fully enclosed shipping container or truck trailer would do.



ChassisBoxx adds value and productivity to existing and under-utilized container chassis and add flexibility to your ground transport needs.









SPECIFICATIONS 40'x8'6"x300mm ChassisBoxx

External Dimensions

 Length
 Width
 Height

 12192 mm
 2591 mm
 300 mm

 40'
 8' 6"
 0' 11.81"

Load and Volume Capacity

Deck Tare Weight

2760 kgs 6080 lbs

PRODUCT FEATURES

- Converts container chassis to flexible use flatbed trailer
- Length, height and width built to spec
- Simple twistlock securing system
- ✓ User defined flooring and Perimeter Tie-Down System (PTS) configuration
- ✓ LTL options using multiple lid configurations
- Customizable lid options doors, insulation, viewing ports
- Available as deck only, or complete deck and lid assembly.

*See separate **Custom Solutions** page for further options

** Further specifications available on request.



THE COIL CARRYING CAKEBOXX

With a specially modified deck and three adjustable cradles, the CoilBoxx™

20' is the perfect option for the safe, secure and cost-effective container transit of coil cargos.

The CakeBoxx Technologies CoilBoxx container encompasses the same 'deck and lid' design, locking system and CSC certification to ISO standard as other 20' CakeBoxx variations. The cradles slot into grooves in the CoilBoxx deck and are easily adjusted to accommodate coil cargos of different sizes. Coils can be quickly and easily loaded/unloaded and effectively lashed with 360° access to the cradles and CakeBoxx Technologies' Perimeter Tie Down System (PTS), CoilBoxx can handle mixed coil ODs as large as 1700mm (66.7"), as small as 300mm and with a max width of 2232mm (87.3"). The maximum

payload for CoilBoxx is 30,500kgs / 67,240lbs.



20'x8'x8'6" CoilBoxx

External Dimensions Length Width Height 6058 mm 2438 mm 2591 mm 19' 10.5" 8' 8' 6" **Internal** Dimensions Width Length Height 5850 mm 2232 mm 2041 mm 7' 4" 19' 2" Load and Volume Capacity Max Gross Weight Tare Weight Max Payload 35000 kgs 4750 kgs 30250 kgs 77160 lbs 10470 lbs 66690 lbs Lid Weight **Stacking Test Load**

86400 kgs

190480 lbs







ADVANTAGES

WHY MOVE COILS IN A CAKEBOXX CONTAINER?

1660 kgs

3659 lbs

- Improved handling Simple, quick loading and securement of coils using existing lashing materials and no need for blocking or bracing.
- Increased efficiency Reduced handling time and increased terminal velocity with seamless integration into logistics chain.
- Safe & Secure Safe to operate, total protection from the weather with lid closed and reduced or eliminated chance of impact damage.
- Containerized Containerizing coils allows for lower cost, more frequent shipping options than break bulk.
- Versatile Can be shipped without the lid like a flat rack for domestic movements, saving time and cost.
- Back haul Cradles can be bundled at one end of the container, allowing for flat deck back haul cargos.



THE CAKEBOXX REFER

Available in 20', and 40' lengths with built to spec options, the CoolBoxx $^{\text{m}}$ reefer container provides temperature control with all the benefits of the CakeBoxx two-piece form factor.



CakeBoxx Technologies CoolBoxx™ reefer containers are perfect for containerizing difficult-to-load goods or cargos that need a high level of security, with a requirement for refrigeration or temperature control. The CakeBoxx design with its easy top and side loading factor, allows shippers to make full use of the container volume and not waste space. This product line makes containerization a possibility for a number of industries where shipment of temperature sensitive products or parts on container vessels was not previously viable with standard containers due to loading or security issues.









ADVANTAGES

WHY USE A CAKEBOXX REEFER?

- Improved handling Simple, quick loading and securement of goods using existing lashing materials.
- Increased efficiency Reduced handling time and increased terminal velocity with seamless integration into logistics chain.
- Safe & Secure Safe to operate, total protection from the weather with lid closed and reduced or eliminated chance of impact damage.
- **Versatile** Perfect for many industries which require temperature control including high tech, electronics, defense, composites, space and aeronautics, pharmaceutical as well as for the shipment of chilled and frozen food and drink.

CAKEBOXX FLAT RACK

FLEXIBLE FREIGHT TRANSPORTATION

Available in 20', 40', 45' and 53' lengths, the CakeBoxx Flat Rack is a collapsible flat-deck solution which offers a great deal of flexibility for intermodal transportation. These can be double stacked and are capable of carrying extremely heavy payloads (up to 57,760lbs for 53' model).

Like CakeBoxx containers with their 'deck and lid' configuration, the Flat Rack range is built with extremely strong TrusDek® technology and easy to load access from the top and all sides. Heavy cargos of any shape can be secured using CakeBoxx Technologies' Perimeter Tie Down System, with the additional advantage of having flat-folding intermediate posts.

Collapsed Flat Rack decks can be stacked four-high to accommodate the same footprint as a standard high cube intermodal container. This flexibility affords the shipper the ability to reposition with great ease, speed and a massive cost saving vs traditional containerization. The CakeBoxx Flat Rack 53' is tailored to US intermodal transport handling equipment; making it perfect for moving cargos across road and rail.



CakeBoxx Flat Rack 53'

HANDLING CYCLE:



1. CakeBoxx Flat Rack secured onto chassis and taken to shippers yard. Cargo loaded onto the Flat Rack.



2. After road transportation to rail terminal, the loaded Flat Rack transferred onto railcar.



The CakeBoxx Flat Rack is transported via rail, where it can be double stacked for cost efficiency.



4. Cargo is transferred from rail to chassis for delivery to customer.

SPECIFICATIONS

CakeBoxx Flat Rack 53' 53' x 8'6" x 457mm (40' post folded) 53' x 8'6" x 9'6" (40' post erected)

External Dimensions

Height (40' post erected)	Height (40' post folded)	Width	Length
2896 mm	473 mm	2600 mm	16154 mm
9′ 6″	1′ 6″	8′ 6″	53′

Load and Volume Capacity

Max Gross Weight Tare Weight Max Payload 32000 kgs 7300 kgs 24700 kgs 70550 lbs 16090 lbs 54460 lbs

Stacking Test Load (stacking at 40' position, 40' post folded)

43200 kgs

Stacking Test Load (stacking at 53' position, 40' post folded)

86400 kgs


43200 kgs 86400 kgs 95240 lbs 190480 lbs

- ✓ 'Flat rack' solution with CakeBoxx build quality
- ✓ Available in 20′, 40′, 45′ and 53′ lengths
- ✓ 8'6" width
- 9'6" height
- Loading from top and all sides
- Can be double stacked when loaded or quadruple stacked with posts folded for back haul
- Perimeter Tie Down System (PTS) custmizable for securing even the most awkward shaped goods
- Steel, FRP, hardwood and OSB plywood flooring options available.

^{*} Further specifications available on request.



WITH CAKEBOXX

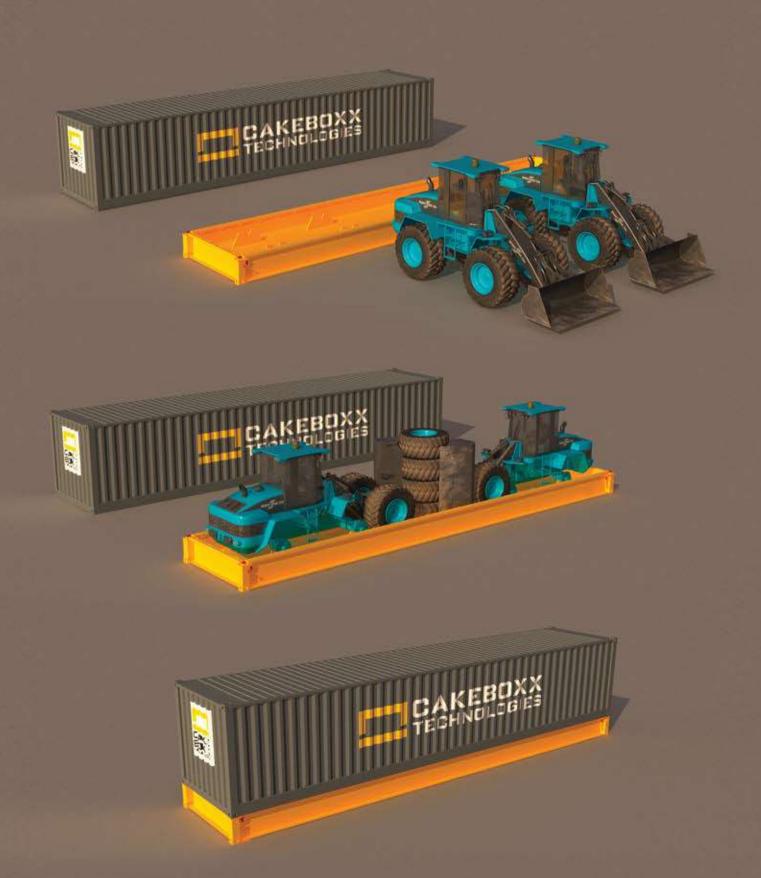

CAKEBOXX FOR VEHICLES

THE PERFECT FIT

Storing/transporting vehicles in standard shipping containers has always been an issue, largely due to the limited space for loading and unloading. These issues are now a thing of the past, as the unique, secure and customizable design of CakeBoxx containers make them ideal for your highly valuable and mission critical vehicles. Loading and unloading is simple: wheeled vehicles can be easily driven onto the deck and secured using the CakeBoxx tailored Perimeter Tie Down System (PTS).

Complete 360-degree access to fully customizable tie-down points safely lock the vehicle to the deck, ensuring reliable delivery of your vehicle in all types of intermodal movement while providing the greatest level of physical security and safety for the cargo and cargo handlers.



BENEFITS FOR VEHICLE STORAGE AND TRANSPORT

High Security and Protection

Perfect for high value, mission critical machinery such as military and defense vehicles

Flat or Recessed floor

Flat floor allowing maximum width or recessed floor for extra headroom

Perimeter Tie-Down System (PTS)

Featured on all models, this unique feature provides maximum security, protecting your vehicles from damage in transit

Forklift Tubes in the Lid

These enable easy removal of the lid

Removable Corner Guides

To assist crane or forklift operators during lid removal or installation

Insulation Options

To prevent extreme temperature excursion and provide the highest degree of environmental control

Doors or NO Doors

For maximum security of your vehicles with access as required

Weather Seal

The CakeBoxx lid has a rubberized seal along the bottom edge to ensure protection against the elements during shipment or storage.





BUILT TO SPEC





WWW.CAKEBOXX-TECHNOLOGIES.COM

info@cakeboxx-technologies.com

CONTACT

USA/GLOBAL

1477 CHAIN BRIDGE ROAD, SUITE 100 MCLEAN, VA 22101, USA

TEL: +1 703-869-3336

UK/EUROPE

THE ARK, SHORT STREET CANTERBURY, KENT CT3 1PR, UK

TEL: +44 (0) 1304 841026

SOCIAL MEDIA









