


Rigid PCB

| | |
|-------------|--|
| Solder Mask | |
| Copper | |
| FR4 Layer | |
| Copper | |
| FR4 Layer | |
| Copper | |
| FR4 Layer | |
| Copper | |
| Solder Mask | |

Rigid PCB Stack Up

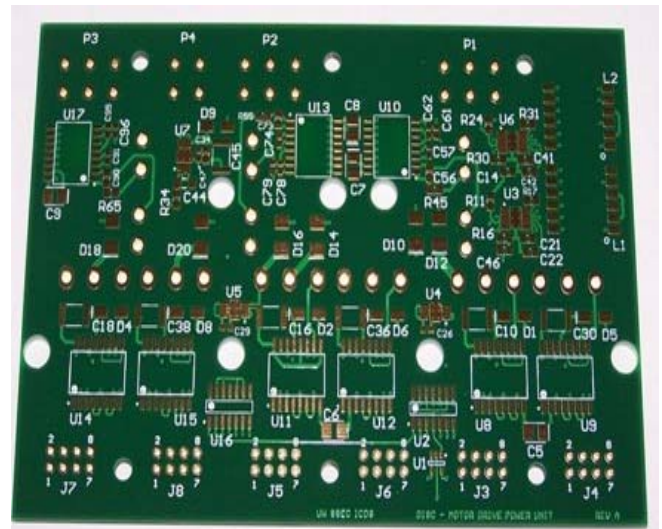

Rigid PCB:

- ✓ Materials: FR4, High Tg, High Frequency
- ✓ Number of Layers: 1 to 20
- ✓ Minimum Trace/Space = 3 mil/3 mil
- ✓ Minimum Drilled Hole Size = .006" finished
- ✓ ½ oz, 1 oz, 2 oz copper thicknesses
- ✓ Immersion Tin, ENIG, Electrolytic Gold, OSP, HASL, LF HASL
- ✓ Silkscreen (White, Black, Yellow)

Tramonto Circuits is a natural choice as your supplier of flexible circuits & printed circuit boards