
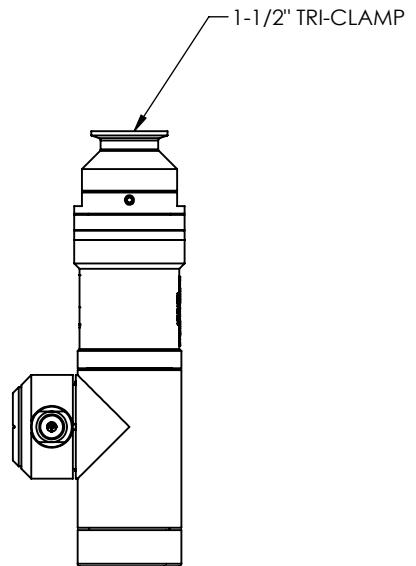
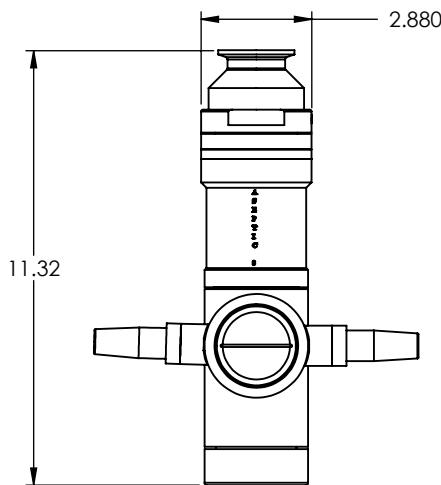


Notes:

- 316 SS, 18-8 Fasteners, Plastics, and Elastomers
- Weight: 14-1/2 lbs.
- Dual (Shown) and Triple Nozzle Available
- Nozzle Sizes: range from 1/4" to 1/2"
- Flow Range: 25 to 100 GPM
- Pressure Range: 20 to 1000 PSIG
- Min Full Wash Cycle: 8 minutes

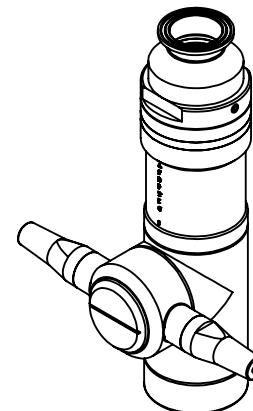

INSERTION CLEARANCE (INCHES)

	DUAL	TRIPLE
FREE HAND	CLUTCH	4-41/64
	PIN	8-15/32
FIXED CENTER LINE	CLUTCH	6-21/64
	PIN	9-41/64

THIS DRAWING IS THE PROPERTY OF GAMAJET CLEANING SYSTEMS, INC. REPRODUCTIONS AND USE OTHER THAN BORROWER'S AGREEMENT IS PROHIBITED. THIS DOCUMENT SHALL NOT BE LENT OR DISPOSED OF DIRECTLY OR INDIRECTLY NOR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IS SPECIFICALLY FURNISHED.

SIZE A SCALE 1:5 FINISH NA

DIMENSIONS ARE IN INCHES
DIMENSIONS INTERPRETED PER
ASME 14.5M-1994
TOLERANCES:
.X ±1/16
.XX ±0.010
.XXX ±0.005
ANGLE ±0.5°

DRAWN BY CM DRAWN DATE 03SEP13
APPROVED BY CM APPROVED DATE 03SEP13

MATERIAL

NA

GAMAJET CLEANING SYSTEMS, INC.
604 JEFFERS CIRCLE
EXTON, PA 19341

DESCRIPTION

DUAL NOZZLE WITH 1-1/2" TRI-CLAMP
ACEPTIC-8

DWG. NO.

GJ 8-5000-CS

REV 01+



SHEET 1/1