



WebMux™

Layers 4-7 Network Traffic Manager



Models A400X, A500X, A500XD, A600X

Performance • Affordability
Discover the Difference

1.888.248.4900

US & Canada Toll Free Number

1.408.248.8960 Phone • 1.408.248.8961 FAX

www.avanu.com



WebMux is an affordable and powerful network traffic management appliance for managing, directing, controlling, and securing Layers 4-7 local network traffic.

Other common names for traffic management products include load balancers (LB), hardware load balancers (HLB), network load balancers (NLB), local traffic managers (LTM), and application delivery controllers (ADC). WebMux provides high-reliability and high-availability of network traffic to its intended destinations by means of placing development emphasis on intensive algorithms that are built on the powerful 64-bit processor platform providing feature-rich performance using the best in class server-grade hardware that offers up to 16-core CPU processing power and 10 gigabit Ethernet (10GbE) interface options.

WebMux is easily configured and added to a local network as a plug-and-run appliance. With an easy graphical user interface (GUI) design setup, trouble-free high performance, low maintenance, and ongoing new feature additions and enhancements, WebMux meets the most demanding traffic load balancer needs for an extensive TCP-based range of applications and services.

Why spend more for high performance and reliability? WebMux is the best affordable 64-bit strength load balancing solution for managing, directing, controlling, and securing Layers 4-7 local network traffic.

All WebMux models come with a full two (2) year limited product warranty (parts and labor) and one (1) year software firmware updates and product technical support.

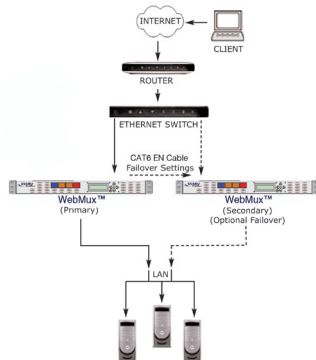


Diagram is for illustrative purpose only

WebMux Highlights

- Easy GUI setup, trouble-free high performance, and low maintenance
- Supports extensive range of TCP-based applications and services
- Powerful 64-bit processing
- High throughput performance (1.7 GB up to 20. GB per second)
- 10 gigabit Ethernet /10GbE (A600X)
- 16-core processing power (A600X)
- Feature-rich integrated software
- Four load balancing operation modes (One-armed single network, one-armed out-of-path, two-armed NAT, two-armed transparent modes)
- Full-range load balancing scheduling methods
- Robust security (DDoS protection, Flood Control® feature for cybercrime protection, IPv4 to IPv6, TCP SYN protection, and up to 8192-bit TLS/SSL encryption strength, TACACS+ and LDAP authentication Payment Card Industry/PCI compliancy)
- IPv6 to IPv4 Translations (Supports IPv6 client requests to IPv4 servers)
- Custom health check (Application services, servers, and server farms)
- Built-in SSL termination
- All models support up to 5,000 servers
- Dedicated ports for out-of-band and in-band management access (A500X, A500XD, and A600X)
- Server-grade error correcting code (ECC) memory (A500X, A500XD, and A600X)
- Solid-state drive/SSD media reliability (A500X, A500XD, and A600X)
- Hot-swap dual power supply options (80 Plus Gold Efficiency)
- Smart temperature controlled fans
- Self-contained (No extra hidden costs)
- No additional annual maintenance contract required (Includes full 2-year limited product warranty and 1-year software firmware updates and product technical support)
- 30-day money back guarantee

Load Balancing Scheduling Methods

Least connections, least connections-persistent, round robin, round robin-persistent, weighted fastest response, weighted fastest response-persistent, weighted least connection, weighted least connections-persistent, weighted round robin, weighted round robin-persistent



Security

Authentication Method: TACACS+ and LDAP
Denial of Service (DoS) and Distributed Denial of Service (DDoS) protection

Flood Control® (Additional IP level protection for DDoS attacks)

HTTPS/SSH management

IPv4 to IPv6 support (Two-armed NAT, Two-armed NAT Transparent, One-armed Single Network, and One-armed Out-of-Path modes)

Network Address Translation (NAT/SNAT)

Multiple address and port mapping

Payment Card Industry (PCI) Compliance

TCP SYN protection

TLS/SSL Encryption Strength (512/1024/2048/4096/8192-bit)

Management

Dedicated ports for out-of-band and in-band management access (A500X, A500XD, and A600X models)

Email notification

In service/Not in service

Port Bonding (802.3ad, LACP-Link Aggregation Control Protocol)

Port-specific services

Secure web browser access (GUI)

SNMP

Fault Tolerance

Application health check

Backup server

Diskless design

Failover via Ethernet link

Failover via multiple ISP links

Failover via network connection (Active/Standby)

Port aggregation

Server-aware

Service-aware

Other Standard Features

Content switching

HTTP compression - Content encoding

IP support - Including basic Layer 2 protocols (STP, MSTP, RSTP), DNS, FTP, HTTP, IMAP, LDAP, NNTP, POP3, Radius, RDP [Terminal Services], SMTP, SNMP, SSH, Streaming media, TCP/UDP based services, TFTP

IPv6 to IPv4 translation (Supports IPv6 client requests to IPv4 servers)

Link interface bonding

Multiple ISP support


Reverse Proxy

Software compression

TCP optimization

VLAN - Multiple, VLAN Trunking (IEEE 802.1Q)

WebMux Models	A400X/A400XD	A500X/A500XD	A600X
Throughput/sec (Max)	1.7 GB	3.8 GB	20.0 GB (10GbE)
Layer 4 Concurrent Connections	3.8 Mil	7.5 Mil	15.8 Mil
Processor	Dual Core	8 Core	16 Core
Memory	4 GB	8 GB (ECC)	16 GB (ECC)
Hot-swap Power Supply (80 Plus Gold)	Single/Dual	Single/Dual	Dual
Chassis	1U	1U	1U

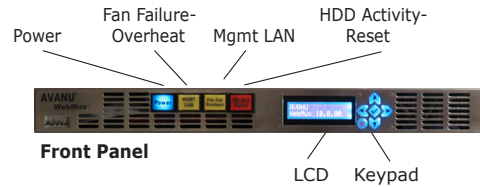

Management LAN Indicator


Management LAN interface link activity and system power

Fan Failure / Overheat Indicator

Monitors fan operation status should any failure occur and CPU temperature should it rise above its limit

HDD Activity/Reset

Hard reset to restart the WebMux and acts as an indicator of disk activity

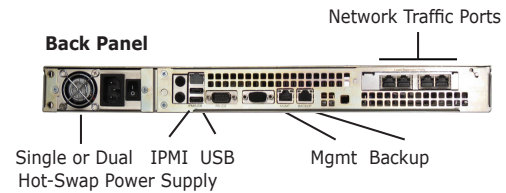

IPMI Port (A500X, A500XD, and A600X)

In-band and out-of-band management network access
Remote control of power-on and power-off
Monitor temperature and fans
Access to remote console for troubleshooting
FRU (field replaceable unit) inventory data

USB Port

Network alternative option for firmware updates and to collect log data

Management Port

Gigabit Ethernet LAN to allow management (GUI and command-line) to be limited to a separate port for segregating management from load balanced traffic

Backup Port

Used for two WebMux units in High Availability (HA) configurations. Cat 5 or 6 Ethernet cable is auto-sensed to straight or crossover. Link status LEDs will be lit when connected.

Network Traffic Ports

Configurable Internet-to-Server load-balancing (Transparent, Single Network, Out-of-Path or NAT mode)