


flipIT® Kits for Laptops and LCDs

flipIT® Installation Considerations

Your contractor can install flipIT® products into any work surface fixture with this criteria:

- 8 inches required in front of unit for keyboard to retract. If keyboard is not required, less than 8 inches is acceptable, but no less than 3 inches for structural integrity.
- 2.75" required in back of unit for structural integrity. Monitors usually mount such that they extend below the flipIT® lid. When closed, this space is necessary for monitor parking space.
- 3 inches of width is required on the side of the cutout where the lock will be installed.
- 1 inch minimum width of clear space is required for installation of the keyboard tray, tabs turned in.
- Optimal spacing allows 3 - 4 inches of clear space on both sides of the cutout.
- Minimum clear space width spacing:
 flipIT 23 = 30 inches flipIT 18 Laptop Safe = 24 inches flipIT 19 = 30 inches
- Clearance distance under surface for operation = 8.5 inches
- Clearance distance overhead for operation = 9 inches
- Recommended distance for from floor to under side of desktop for keyboard mounting = 29-29.25 inches
- Recommended desktop thickness = 30mm (1.18 inches)
- Recommended desktop height for use with keyboard = 28 inches; with keyboard tray = 30 inches
- Optimal spacing for side-by-side stations = 30 inches point to point for flipIT® 18 and 19; 36 inches for flipIT® 23.
- Optimal table top widths for single workstations flipIT® 18 and 19 = 36 inches; flipIT® 23 = 44 inches

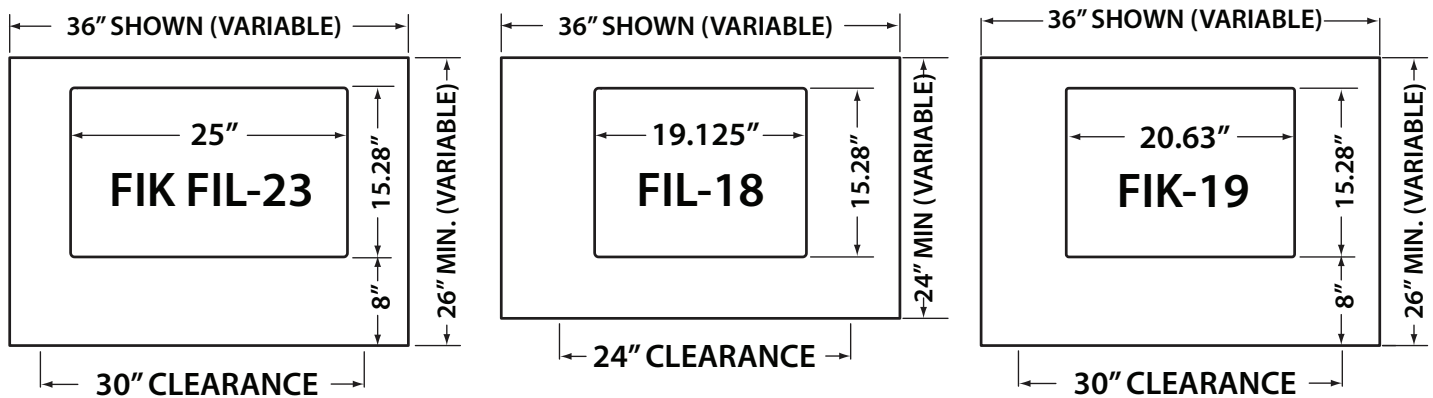

Materials:

- Lids are medium density fiberboard (MDF) finished in black thermofoil.
- Top surface lid color options are black and unfinished MDF so your contractor can match the top to the rest of the cabinet.
- All steel construction of flipIT® mechanical
- All finished metal parts are standard in black powdercoat; however, special order RAL color matches can be accommodated on a custom order basis.
- Made in USA

Model Numbers:

FIK 19 flipIT® 19 with keyboard tray
FIH 19 flipIT® 19 no keyboard tray

FIK 23 flipIT® 23 with keyboard tray
FIH 23 flipIT® 23 no keyboard tray

FIL 18 flipIT® 18 Laptop Safe

FIL 23 flipIT® 23 Laptop Safe

Distributed by:



www.smartdesks.com
 800 770 7042

flipIT® Installs in Your Desktops for Convenience & Security



flipIT® Laptop Safe

Models FIL-18 and FIL-23 (shown)
Touch Latch Opening, Key Lock

Perfect for:

- Offices
- Conference Tables
- Presenter Podiums
- Reception Stations
- Customer Service Areas

Sizes:

- FIL-18 Compartment = 16 x 14.625 x 2.5
- FIL-23 Compartment = 22.5 x 14.625 x 2.5

flipIT® Workstations

Models FIK-23 and FIK-19 (shown)
Keyboard Tray Opening, Key Lock optional

Models FIH-23 and FIH-19
No Keyboard Tray, Key Lock optional

Flip 16:9 Wide Screen LCDs

- LCD flips under, keyboard retracts
- Lock option for controlled access
- Makes more work space

Sizes:

- FIK-19 Max LCD Case Width = 19
for most 20" diagonal 16:9 LCDs
- FIK-23 Max LCD Case Width = 23
for most 24" diagonal 16:9 LCDs



SMARTdesks®

www.smartdesks.com • 800 770 7042