

A CALLED TO SAFETY



Compact. Tri-Color.

The first extremely compact, tri-color perimeter light on the market.





Available in four and three inch options.

Actual size shown.

Three inch version coming this Fall.

Smart Design.

VEHICLE INTEGRATION

Fascia's unobtrusive design visually blends into today's police vehicle body styles.







Stud Mount with 90 Degree Adjustable Edge Mount Bracket

Vehicle integration

continued



Stud Mount





Quick Mount

Mounting options

Mounting options allow Fascia to be placed nearly anywhere for 360 degree, multi-zone coverage.





Quick and Stud Mounts

Screw Mount

Quick Mount



Installs with 3M VHB adhesive No exposed fasteners VHB seal light to vehicle

Stud Mount



Installs with threaded studs and nuts No exposed fasteners Three holes drilled into vehicle Full silicone seal light to vehicle

Screw Mount



Installs with 2 screws
Screws are exposed after installation
Three holes drilled into vehicle
Silicone seal light to vehicle




Depth: 0.42" (1 cm) from mounting surface. Actual size.





DRACKETS

Quick Clip
Use with Quick Mount Light

90 Degree with ± 15 Degrees of Adjustment Use with Stud Threaded Mount Light 90 Degree Edge with ± 15 Degrees of Adjustment Use with Stud Threaded Mount Light

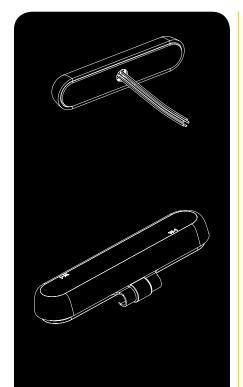

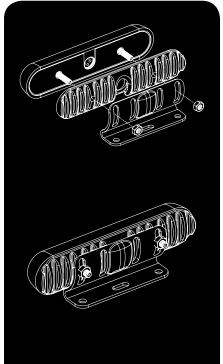

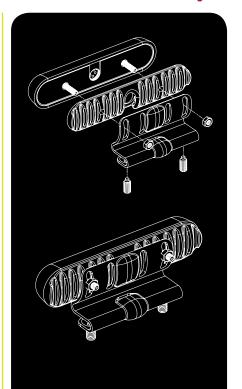

Smartly designed




DOW CORNING

SoundOff Signal worked in collaboration with Dow Corning, a global leader in silicones, silicone-based technology and innovation, to create a first generation optical design called ClearDuty™.

ClearDuty withstands extreme usage and weather conditions well beyond traditional polycarbonate lenses:

- Small footprint with maximized brightness
- · Resistance to scratching, pitting and cracking
- Keeps water out
- High UV characteristics eliminates yellowing



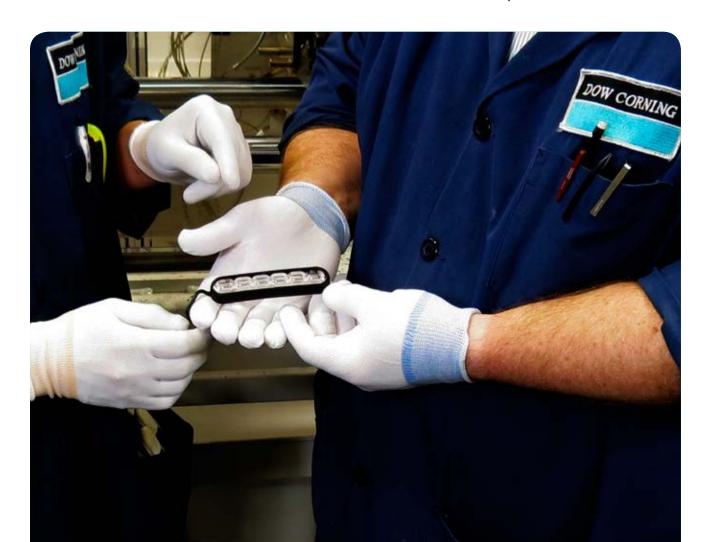



FLASH PATTERNS 12 Single color patterns, 14 Dual or 14 Tri-color patterns

INPUT VOLTAGE 9-32 Vdc

CURRENT DRAW < 1.0 Amps @ 12.8 Vdc, < 0.5 Amps @ 25.6 Vdc

LIGHT SYNC 24

OPERATING TEMPERATURE -40° C to +65° C

DIMENSIONS Quick Mount: 2.9" (7.36 cm) L x 0.92" (2.3 cm) H x 0.47" (1.2 cm) D (from mounting surface)

Screw Mount: 3.425" (8.7 cm) L x 0.92" (2.3 cm) H x 0.42" (1 cm) D (from mounting surface) Stud Mount: 2.9" (7.36 cm) L x 0.92" (2.3 cm) H x 0.42" (1 cm) D (from mounting surface)

Quick Mount: 4.04" (10.3 cm) L x 0.92" (2.3 cm) H x 0.47" (1.2 cm) D (from mounting surface) Screw Mount: 4.52" (11.4 cm) L x 0.92" (2.3 cm) H x 0.42" (1 cm) D (from mounting surface) Stud Mount: 4.04" (10.3 cm) L x 0.92" (2.3 cm) H x 0.42" (1 cm) D (from mounting surface)

CERTIFICATIONS SAE J595 and J845 Class 1 certified and CA Title 13, Article 22 compliant

WARRANTY Five-year



www.soundoffsignal.com

PO Box 206 | Hudsonville, MI 49426

toll free: 1.800.338.7337 | office direct: 616.896.7100

order fax: 616.896.1286







