




VOLANTE Canopy Light Application




VOLANTE Flood Light Application

OPTIC TYPES


INDUSTRY DEFINING OPTICS TECHNOLOGY

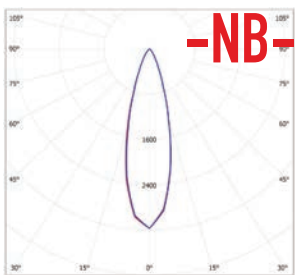


30° x 30°
Narrow Beam

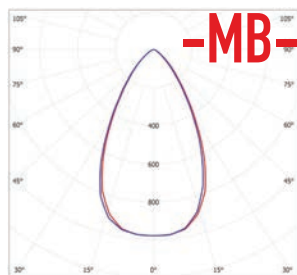

60° x 60°
Medium Beam

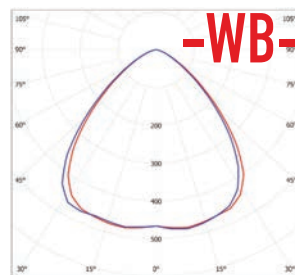

90° x 90°
Wide Beam

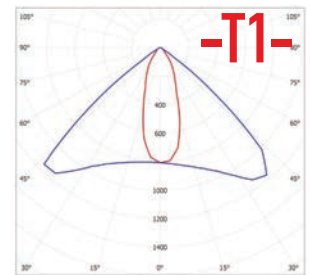

30° x 100°
Type I

VOLANTE® SERIES

HIGH OUTPUT FLOOD & CANOPY LIGHTS

INTRODUCING THE VOLANTE OPTIC SYSTEM

The VOLANTE flood light is a modular lighting system giving you the best in lumen output and beam spread. The modular lighting system is assembled in the United States and offers flexibility for indoor and outdoor lighting. VOLANTE is perfect for the most challenging environments offering an industrial-grade, high-density, IP65 lighting solution. Great for retrofit and new construction.

CHOOSE YOUR COVERAGE

Choose from the available optic types below that best meets the project specifications.

CHOOSE YOUR FORMAT

See the next pages for the form-factor options that will work for your environment.

CHOOSE YOUR OUTPUT


Each format has light output options for your application.

- Parking lots
- Warehouses
- Logistics centers
- Storage yards
- Factories
- Campuses
- Parks




INDUSTRY DEFINING OPTICS TECHNOLOGY


OPTIC TYPES




50° x 140°
Type II

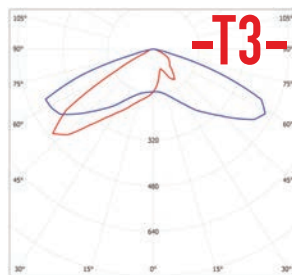

40° x 140°
Type III



30° x 140°
Type IV

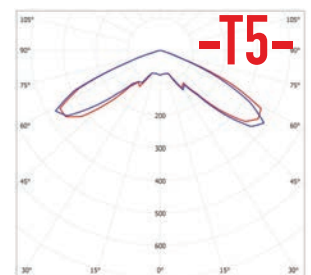

140° x 140°
Type V

VOLANTE®

CANOPY LIGHT



Compact & Modular Design

VOLANTE Canopy Lighting comes in one-module or two-module configurations. Arrives fully assembled with a lead-wire connection.

- New construction/retrofit
- Storage facilities
- Roadways & parking garages

FEATURES & BENEFITS

- All models: In-stock and ready to ship
- Units come fully assembled and hardwire ready
- IP65 wet location rated
- >130 lm/W exceeds performance standards
- Recessed or surface mounting options



QUICK SPECS


Voltage	120VAC -277VAC
Connection	Hardwire
Environment	Indoor/Outdoor

Visit the product page on the website for specification sheets, install guides and photometric reports.

VOLANTE Canopy Light Fixture RECESSED MOUNT

SKU	CCT OPTION	WATTAGE	LUMENS / FIXTURE
DI-VL-CP100W-40-R-**	4000K	100W	14300
DI-VL-CP100W-50-R-**	5000K	100W	14300
DI-VL-CP200W-40-R-**	4000K	200W	26800
DI-VL-CP200W-50-R-**	5000K	200W	26800


** Use the 'Optic Types' variable from pages 110-111

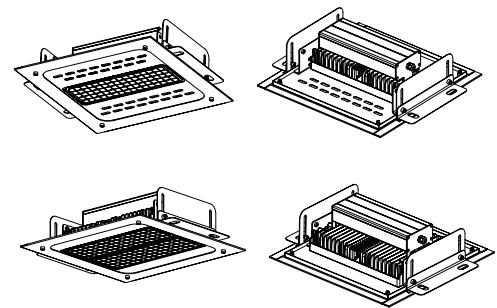

VOLANTE Canopy Light Fixture SURFACE MOUNT

SKU	CCT OPTION	WATTAGE	LUMENS / FIXTURE
DI-VL-CP100W-40-S-**	4000K	100W	14300
DI-VL-CP100W-50-S-**	5000K	100W	14300
DI-VL-CP200W-40-S-**	4000K	200W	26800
DI-VL-CP200W-50-S-**	5000K	200W	26800

** Use the 'Optic Types' variable from pages 110-111

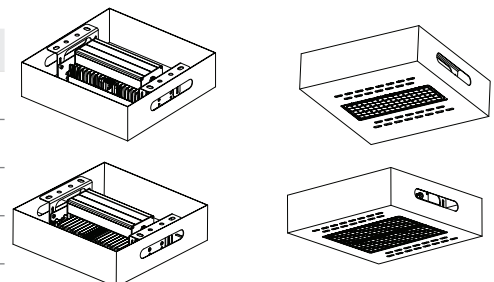







VOLANTE®

FLOOD LIGHT



Expandable, High-Output Format

VOLANTE Flood Light Fixture

SKU	CCT OPTION	WATTAGE	LUMENS / FIXTURE
DI-VL-FL75W-40-**	 4000K	75W	9600
DI-VL-FL75W-50-**	 5000K	75W	9600
DI-VL-FL150W-40-**	 4000K	150W	19200
DI-VL-FL150W-50-**	 5000K	150W	19200
DI-VL-FL225W-40-**	 4000K	225W	28800
DI-VL-FL225W-50-**	 5000K	225W	28800

** Use the 'Optic Types' variable from pages 110-111



75W
SINGLE MODULE
CONFIGURATION



150W
TWO MODULE
CONFIGURATION



225W
THREE MODULE
CONFIGURATION

VOLANTE Flood Lighting comes in one-module, two-module, and three-module configurations. Arrives fully assembled with a lead-wire connection.

- Building facades
- Area lighting & logistics centers
- Signage & billboards

FEATURES & BENEFITS

- All models: In-stock and ready to ship
- Units come fully assembled and hardwire ready
- IP65 wet location rated
- >130 lm/W exceeds performance standards



QUICK SPECS

Voltage	120VAC -277VAC
Connection	Hardwire
Environment	Indoor/Outdoor

Visit the product page on the website for specification sheets, install guides and photometric reports.