




SIBORG
SYSTEMS INC

Simplified PCB Testing and Troubleshooting

Features

- Automatic L-C-R and ESR measurements
- 1% basic accuracy
- Automatic range selection
- Manual mode selection
- One-handed operation
- Gold-plated probes
- 1 oz. weight
- Designed for SMT
- Rechargeable battery
- Bright OLED display

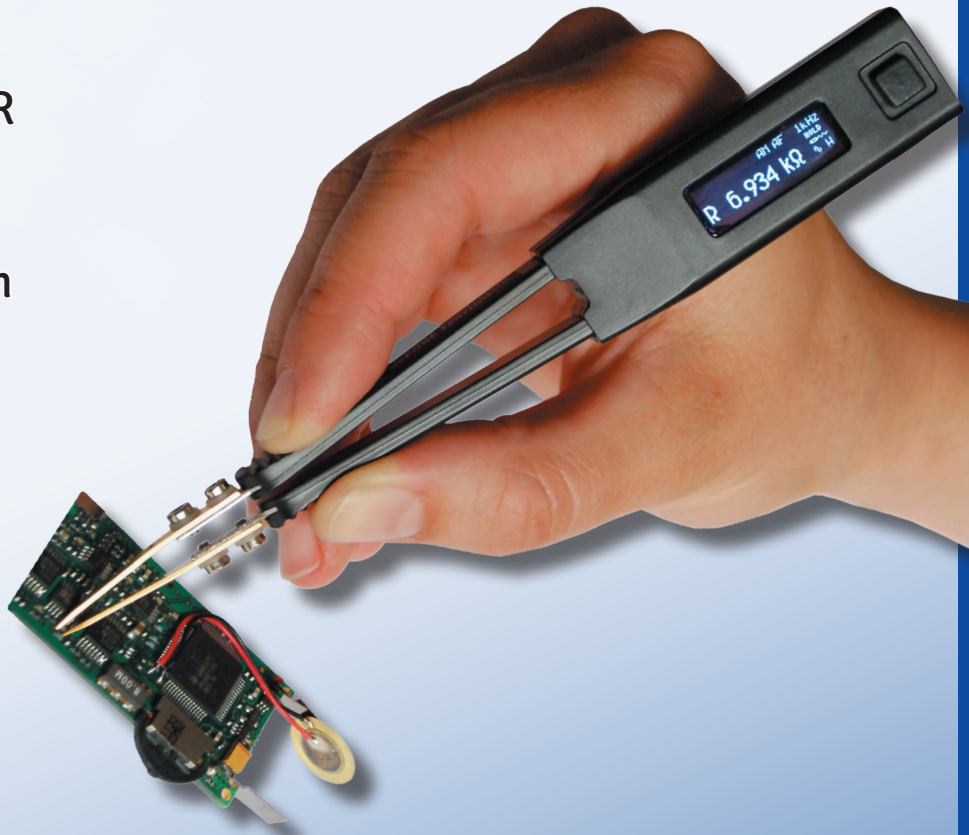

Technical Specifications

Basic Accuracy: 1%

Test Frequency: 100 Hz, 1 kHz, 10 kHz

Test Signal Level: 0.45 +/- 5% Vrms

Measurement Ranges

Resistance R: 0.05 Ω to 9.9 M Ω

Capacitance C: 2 pF to 4999 μ F

Inductance L: 0.5 μ H to 999 mH

Physical Specifications

Weight: 14.8 x 2.0 x 1.5 cm

Size: 29 grams (1 oz.)

Battery: 3.7V LiPO
40 hour battery life

LCR-Reader

LCR-meter for SMT

Siborg Systems Inc.

24 Comberemere Crescent
Waterloo, Ontario
Canada
N2L 5B1



Web: www.siborg.com

Phone: 1-519-888-9906

Fax: 1-519-725-9522

Email: info@siborg.ca

www.LCR-Reader.com