

evluma



OLS-2-AA2



OLS-1-A1

solutions for post top lighting

Build-Your-Own Acorn

featuring OmniMax™



OLS-1-B1

Build-Your-Own Acorn

Extraordinary Quality, Everyday Affordability, Time-Saving Versatility

Build-Your-Own Acorn delivers a complete, customizable architectural lighting solution featuring the OmniMax, Evluma's patented, screw-in LED retrofit as the light source. Avoid complicated kits, difficult mountings, elaborate wiring and large minimum requirements. Select only what you need to complete your project on-time and on budget.

Please see product documentation for OmniMax, globes (OLS), fitter (CF8), Photocontrol Failsafe and the ConnectLED app for a complete technical capabilities profile.

Materials

Globes are offered in three material types.

LD Acrylic: Evluma's recommendation for best-in-class, visually-pleasing lighting. Optical transmission >90%. Impact resistant.

Clear Acrylic: Stays sparkling after prolonged use. Resistant to weathering and aging, including damage from UV, also impact resistant. Optical transmission up to 92%.

Clear Polycarbonate: Recommended for extreme environments with a high impact resistance even at subzero temperatures. UV stabilized. Optical transmission up to 88%.

Uplight Blocker

Uplight blocker decreases upward light 30-40% and increases downlight by 20-25%.

OLS-2-AA2

Choose Type III or Type V, add uplight blocker or finial.



OLS-2-AA1

Choose Type III or Type V, add uplight blocker or finial.

The OmniMax™

This long-life light source was designed to emulate, yet outperform, legacy HID bulbs. OmniMax delivers beautiful light in your choice of six color temperatures.



Premium/Standard:

OmniMax Premium includes Evluma's innovative solutions for smart lighting: Photocontrol Failsafe & compatibility with ConnectLED. Is beautiful light all you need? Order OmniMax Standard.

ConnectLED™:

Wirelessly control OmniMax Premium via a Windows PC, iOS or Android device using this helpful Bluetooth app.




Photocontrol

Failsafe™:

Say goodnight to "dayburners," and never roll another truck to replace a failed photocontrol.

Fitter CF8



Capitol fitter is cast aluminum with a ceramic mogul socket.

Paint is a durable Tiger Drylac powder coat with excellent weather and UV resistance.

Order with or without a photocontrol, in black or green. Fits 3" & 4" poles.

Optional Photocontrol

Evluma has specified a utility-grade, fail-on photocontrol with an IR-Filtered phototransistor for the CF8-PC. This 120-277VAC ANSI C136.24 photocontrol draws less than 0.4W and is IP65.

Warranty

The base, capital fitter CF8, has a 5-year warranty on the finish. Acrylic globes are warrantied for 5 years against yellowing.

The OmniMax and all electronics, including the capital's optional photocontrol are warrantied for 10 years.


OLS-4-BB2

Choose Type III or Type V, black or green, photocontrol optional.



OLS-4-BB1

Choose black or green. photocontrol optional.

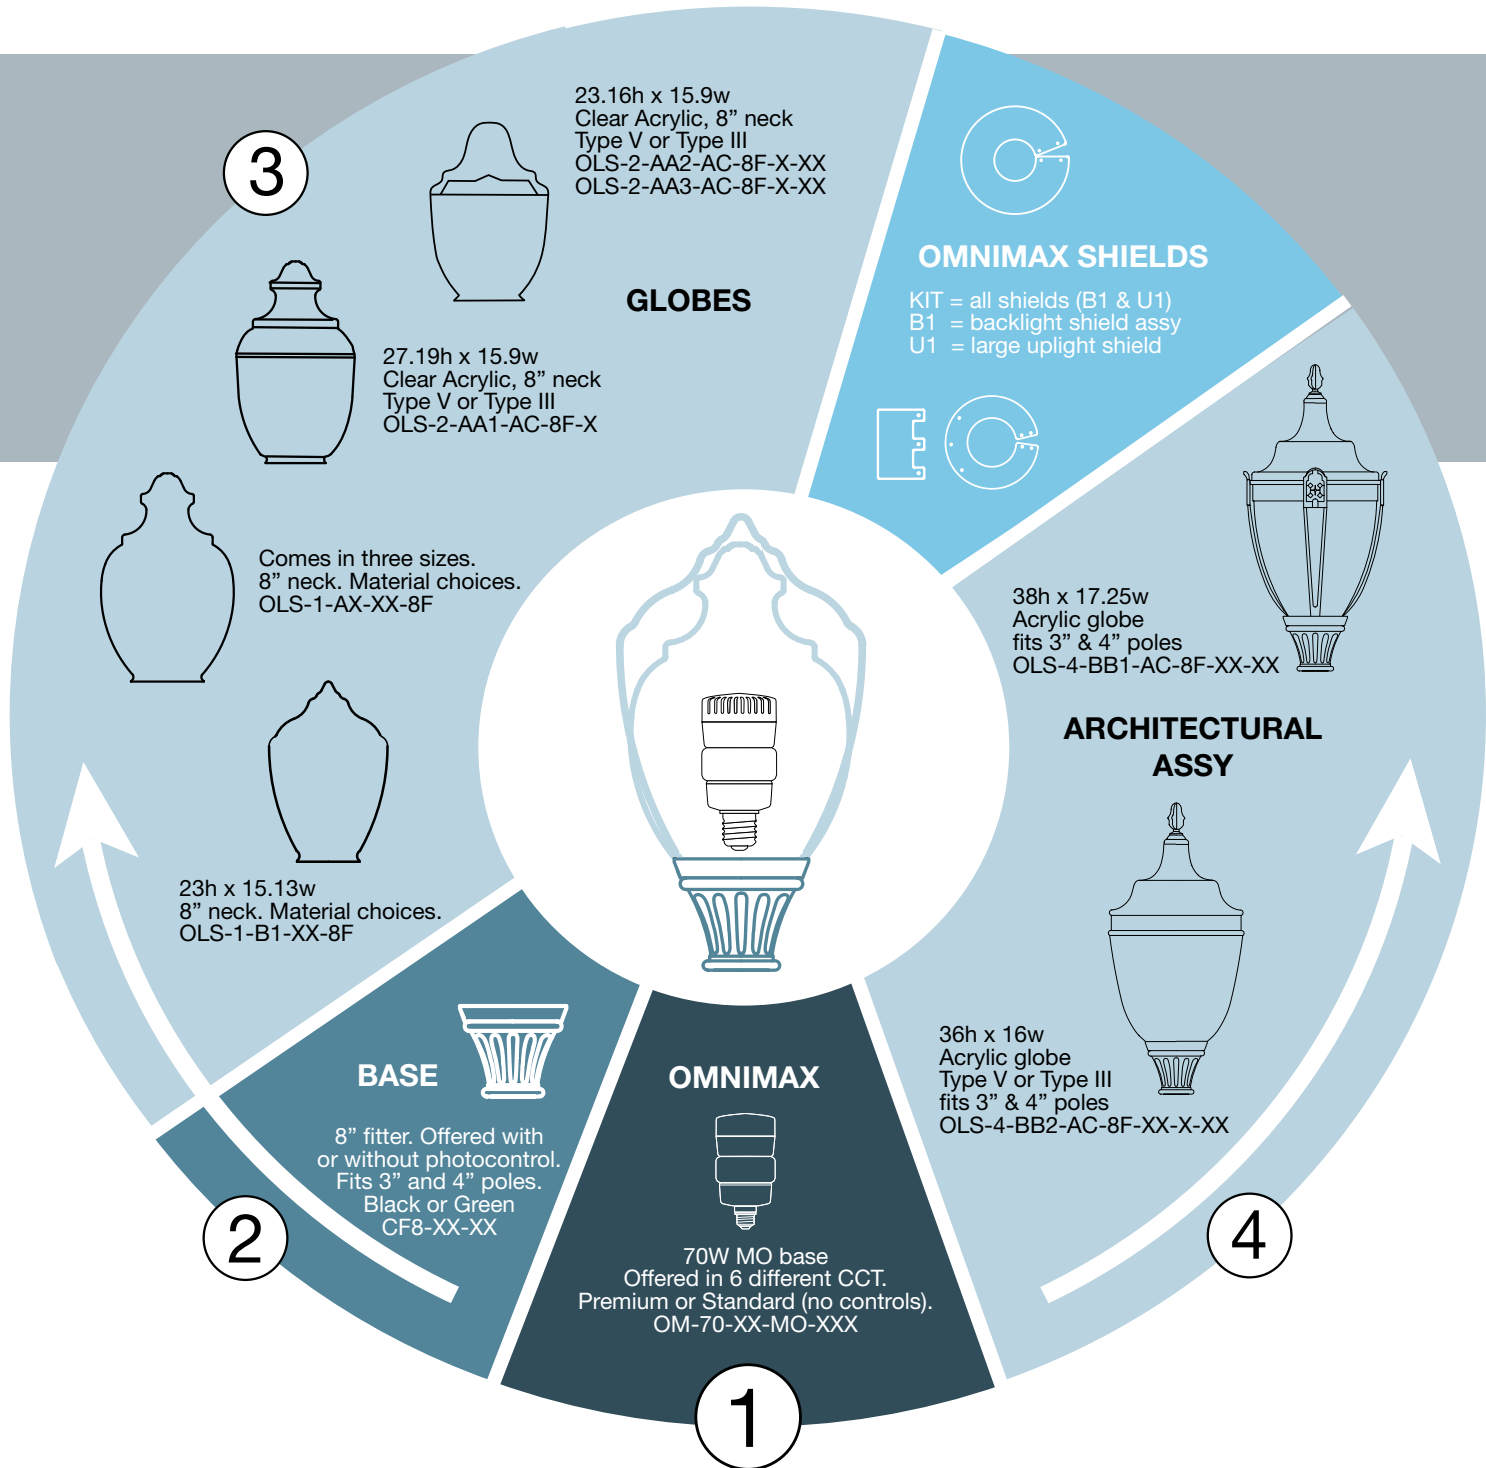

How to Order

Order 1+2+3 (OmniMax + Base + Globe) + Accessory
or Order 1+4 (OmniMax + Architectural Assy) + Accessory
See next page for individual catalog numbers and options.

Example 1+2+3

OM-70-3K-MO-PRE
CF8-NC-BL
OLS-1-A1-LD-8F

Accessory

OM-LTS-KIT
OLS-1-FINIAL

Example 1+4

OM-70-3K-MO-PRE
OLS-4-BB1-AC-8F-PC-BL

Accessory

OM-LTS-KIT


OM Accessory Order Separately

OmniMax Shields

OM-LTS-KIT

OM-LTS-B1

OM-LTS-U1



Globe Accessory Order Separately

Product

OLS-1-FINIAL

OLS-1-A1 & B1
OLS-2-AA1



Product

OLS-2-BLOCKER

OLS-2-AA1 Only




Build-Your-Own Acorn Ordering

For detailed product information please see the additional documentation for OmniMax, globes (OLS), and fitter (CF8).


1 **OmniMax** OM-70 - _ _ - MO - _ _ _

Product	CCT	Base	Connectivity
OM-70 = 70W OmniMax	2K = 2000K 22 = 2200K 27 = 2700K 3K = 3000K 4K = 4000K 5K = 5000K	MO = Mogul	PRE = premium STD = standard




2 **Base** CF8 - _ _ - _ _

Product	Photocontrol	Color
CF8 = 8" Fitter	PC = photocontrol NC = no photocontrol	BL = black GN = green




3 **Globe 1** OLS-1- _ _ - _ _ - 8F

Product	Style (Size)	Material	Neck Size
OLS-1 Globe	A1 = 26.88h x 16.6w A2 = 25.19h x 16.5w A3 = 21.18h x 14w	LD = LD Acrylic AC = acrylic clear PC = polycarbonate clear	8F = 8 inch





Globe 2-AA1 OLS-2-AA1-AC-8F - _ _

Product	Distribution
OLS-2-AA1-AC-8F = Globe Style 2-AA1 Clear Acrylic, 8" Neck 27.19h x 15.9w	3 = type III 5 = type V




Globe-2-AA2 OLS-2-AA2-AC-8F- _ _ _ _

Product	Distribution	Finial
OLS-2-AA2-AC-8F = Globe Style 2-AA2 Clear Acrylic, 8" Neck 23.16h x 15.9w	3 = type III 5 = type V	BF = black finial RF = raw finial NF = no finial



Globe 1-B1 OLS-1-B1 - _ _ - 8F

Product	Material	Neck Size
OLS-1-B1 = Globe Style B1 26.88h x 16.6w	LD = LD Acrylic AC = acrylic clear PC = polycarbonate clear	8F = 8 inch




Globe-2-AA3 OLS-2-AA3-AC-8F- _ _ _ _

Product	Distribution	Finial
OLS-2-AA3-AC-8F = Globe Style 2-AA3 Clear Acrylic, 8" Neck w/ Uplight Blocker 23.16h x 15.9w	3 = type III 5 = type V	BF = black finial RF = raw finial NF = no finial


4 **Assy-4-BB1** OLS-4-BB1-AC-8F- _ _ - _ _

Product	Photocontrol	Color
OLS-4-BB1-AC-8F = Globe Style 4-BB1 Acrylic Globe. fits 3" & 4" poles 38h x 17.25w includes finial	PC = photocontrol NC = no photocontrol	BL = black GN = green



Assy-4-BB2 OLS-4-BB2-AC-8F- _ _ - _ _

Product	Photocontrol	Distribution	Color
OLS-4-BB2-AC-8F = Globe Style 4-BB2 Acrylic Globe. fits 3" & 4" poles 38h x 17.25w includes finial	PC = photocontrol NC = no photocontrol	3 = type 3 5 = type 5	BL = black GN = green



Evluma makes one thing: Utility-grade outdoor LED lighting solutions

From heat management, to light quality, to integrated controls, we've been solving the biggest challenges in LED for over 2 decades. We help cities, municipalities and utility providers evolve their lighting infrastructure to meet needs of tomorrow.



3600 Lind Avenue SW Suite 140
Renton WA 98057
425-336-5800 www.evluma.com