

MULTI-TENANT



WATCHMAN®


Your Virtual Security Guard

WXL

model

Can integrate with
CellGate external
cameras

ADVANCED TELEPHONE ENTRY with LIVE STREAMING VIDEO

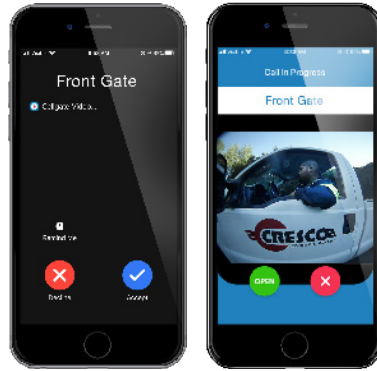

WXL Surface Mount

Can integrate w/CellGate external cameras

CELLGATE EXCLUSIVES

WXL Pedestal Mount

Can integrate w/CellGate external cameras

Provides One Wiegand Input

AA1XLSM ATT
AA1XLSM VZN
AA1XLSM INT

Provides Two Wiegand Inputs

AA1XLSM-1X ATT
AA1XLSM-1X VZN
AA1XLSM-1X INT

Provides Three Wiegand Inputs

AA1XLSM-2X ATT
AA1XLSM-2X VZN
AA1XLSM-2X INT

Flush Mount Kit
part #s in
Specifications
section.

- Streaming cellular video telephone entry
- Integrates with up to 3 external cameras
- Voice Mail Intelligence - VMI
System ignores voice mail and continues call group
- Verizon or AT&T LTE service (No VoIP fees required)
- Ships with both AT&T & Verizon SIM cards
- Prop open notification if gate is left open more than 3 minutes

Provides One Wiegand Input

AA1XLPE ATT
AA1XLPE VZN
AA1XLPE-1X INT

Provides Two Wiegand Inputs

AA1XLPE-1X ATT
AA1XLPE-1X VZN
AA1XLPE-1X INT

Provides Three Wiegand Inputs

AA1XLPE-2X ATT
AA1XLPE-2X VZN
AA1XLPE-2X INT

NEW WXL FEATURES



**QR CODE
VISITOR
MANAGEMENT**

**SMART SCREEN
CALL MANAGEMENT**



**Now Available with up to
3 Wiegand ports**



QR Code Visitor Management

Visitors can receive QR code invites with restricted date/time access on their smart phones.



Smart Screen Call Management

Customizable touch screen call options, for improved visitor management.

ADDITIONAL FEATURES

- Brilliant 11" color touchscreen
- Built-in HID card reader
- Built-in postal lock
- Up to 3,000 directory listings
- Calls up to 6 app video contacts and 3 voice-only numbers per directory listing
- 30,000 local codes and 64,000 non-local codes

 cellgate

powered by:

verizon  AT&T  ethernet 

1.855.MY.GATES

cell-gate.com

MULTI-TENANT



WATCHMAN®

Your Virtual Security Guard



- Dedicated team for multi-tenant property management support
- Included with your service subscription at no charge
- Both personalized and video training
- TrueCloud™ portal and CellGate app support
- Ongoing support for the life of your account

Tenant Benefits


- See live video of visitors on telephone entry
- QR code visitor management
- Easy to use CellGate iOS/Android app
- Tenant managed call groups
- Peace of mind and convenience



Web Portal

Manage All Your CellGate Devices on One Dashboard

- Master login for multiple properties
- Login privileges with multiple user tiers
- Call group management
- Resident and visitor credential management
- Mass credential management
- Setup and management of notifications, gate hold open schedules
- Date/time logs of all gate and door access attempts, access codes used, and photos of each gate access attempt (with Advantage and Advantage Plus plans)
- Hosted by Microsoft Azure



App Available at
App Store and
Google Play

CellGate App

- Receive video/audio calls from visitors
- **Property Manager Can:**
 - Manage Resident app functions:
 - Allow residents to issue visitor QR codes
 - Allow residents to manage call groups
 - Open or hold open from anywhere
 - Close on demand (override holds)
 - Take photos from internal and external cameras

*See external camera sheet for more details



External Camera Options

- Up to 3 external cameras

Photos

- Taken on entry transactions and on demand
- Cloud-stored still photos

Recorded Video

- Pixel activated video stored on SD card or accessible via CellGate technical support
- Recording w/6-second pre-record



WXL

model

Can integrate with
CellGate external
cameras

SPECIFICATIONS

External Camera Options

- Bullet Cameras
 - 4mm Fixed Focal Lens
 - 5-64mm Varifocal Lens
 - 2.8-12mm Varifocal Lens
- Dome Camera
 - 3-10.5mm Varifocal Lens

HD Camera angles:

- Horizontal: 120°
- Vertical: 64°
- Camera MP: 3MP

Power Consumption

- Hardware: 625mA (average)
- External Cam: 350ma to 1A

Wiegand Input Retrofit Part Numbers

- Part #s Required:
- Mounting plate (supports up to two expansion boards)
p/n: CB-WIM 4000
- Expansion board (order one or two as required)
p/n: CB-WIM 2000

3 Relays:

- Switching voltage: 30V
- Switching current: 5A

3 Digital inputs

IP65 - outdoor rated

Operating Temperature
-20°C - 55°C



Dimensions - Surface Mount

- Height- 375mm (14.75")
- Width- 305mm (12.75")
- Depth- 95mm (3.75")

Dimensions - Pedestal Mount

- Height- 375mm (14.75")
- Width- 305mm (12.75")
- Depth- 95mm (3.75") - Bottom
- 152mm (6") - Top

All electronics are mounted inside, no external box/wiring needed.

Cellular Technology/Networks

LTE: AT&T and Verizon

Internet

Shipped with DHCP default
Private IP addresses may be required.

Included in box

- Watchman WXL
- Power supply - 5A
- Magnetic switch
- Installation manual & user manual

Flush Mount Kits (Surface Mount Model):

- ENC-WFM1003 includes trim ring and rough-in box
- ENC-WFM1004 includes trim ring (no rough-in box)
- ENC-WFM1005 includes trim ring, L-bracket antennas, rough-in box
- ENC-WFM1006 includes trim ring, L-bracket antennas (no rough-in box)

Antenna Options

- L-bracket
- Directional panel
- Signal booster



Access Control



Voice



BASIC PLAN

Access Control



Voice



Photos



ADVANTAGE PLAN

Access Control



Voice



Photos



Video



ADVANTAGE PLAN PLUS

Contact your CellGate representative or local distributor for Tiered Plan pricing.

Tiered Monthly Service Plans

1.855.MY.GATES

cell-gate.com