

Intrinsically Safe Permissible Dual-Light™ Flashlight w/ Dual Magnets

Flashlight



Floodlight



Dual-Light



TECHNOLOGY

This non-rechargeable Dual-Light™ flashlight with dual magnets is cETLus, ATEX and IECEx listed Intrinsically Safe Permissible. It uses a CREE® LED rated at 120 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 170 meters. A 120 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provides momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Additionally, the integrated magnets located in the base of the handle and pocket clip, provide for almost limitless hands-free usage. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE
PERMISSIBLE**



120 Flashlight
Lumens

120 Floodlight
Lumens

240 Dual-Light™
Lumens

- cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible
- Flashlight/floodlight/Dual-Light™
- Two Integrated hands-free magnets
- Beam distance rated at 170 meters



XPP-5422GM

XPP 5422GM



Intrinsically Safe Permissible Dual-Light™ Flashlight w/ Dual Magnets



XPP-5422GM

High-efficiency deep parabolic reflector

FEATURES

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum versatility and user safety
- Powerful integrated magnets built into the base and clip for multiple hands-free options
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Limited Lifetime Warranty*

SPECIFICATIONS

- Lumens: flashlight-120, floodlight-120, dual-light-240
- Run-time: flashlight-17.5 hrs, floodlight-17.5 hrs, dual-light-4.5 hrs
- Beam distance: 170 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.2in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 6.9oz

FL 1 STANDARD		
120 LUMENS	17h 30min	170m
7250cd	2m	1m

INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible

Patent 7,738,229




Built in pocket/belt clip with integrated magnet

Integrated magnet built into the handle

High-efficiency deep parabolic reflector

Wide-beam floodlight

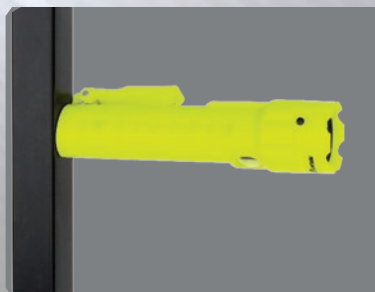

Hands-free magnet in base



Hands-free magnet in pocket clip



Permissible Nightstick 5422 Flashlight/Floodlight

MSHA APPROVAL No. 20-A130001-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only. Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types. Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only. The Model Nightstick 5422 must not be opened in areas where permissibility is required.

 ID 4002026 INTRINSICALLY SAFE SECURITE INTRINSEQUE	CLASS I DIV 1 GRPS A-D T3	Ex ia I Ma
	CLASS II & III DIV 1 GRPS E-G T135C	Ex ia IIC T3 Ga
	CLASS I ZONE 0 Ex ia IIC T3 Ga	Intertek ITS 13ATEX27837X
	CLASS I ZONE 0 Ex ia IIC T3 Ga	IECEX ETL 13.0026X
 0359	-20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline	

Conforms to:
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

Certified to:
CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5422GM	80448 6

*Limited Lifetime Warranty • Product is warranted to be free from defects in workmanship and materials for the original purchaser's lifetime. The Limited Lifetime Warranty includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two (2) years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.