
STAINLESS STEEL GRIP-SEALS™ and KORD-GARDS™



- UL Listed
- CSA Certified
- IP68/NEMA 4x
- Liquid Tight Seal
- 304 Stainless Steel
- RoHS Compliant
- Corrosion Resistant
- Sealing O-Ring



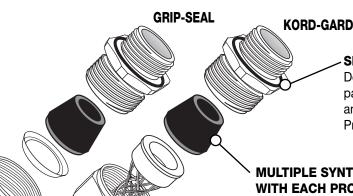

SEALING "O" RING

Designed to fit tightly against panel surface to keep moisture and other contaminants out of panel. Protects connections from corrosion.

MULTIPLE SYNTHETIC BUSHINGS INCLUDED WITH EACH PRODUCT

One part number covers a variety of cord diameters. Seals out water, oil, metal particles and other contaminants.

304 STAINLESS STEEL SMOOTH FLANGE COMPRESSION NUT AND THREADED BODY

Smooth flange compression nut eliminates crevices where bacteria can grow. Ideal for wash down areas. 304 Stainless Steel design resists impact and corrosion. Provides exceptional gripping strength. Easy to install.

FULL DOUBLE WOVEN STAINLESS STEEL MESH (Kord-Gards only)

Provides exceptional gripping strength. Extends cable life. Resists corrosion.

ORDERING INFORMATION

	Part Number	Cord Diameter Range	Knock-Out or Fitting Size	Number of Bushings	Knock-Out Drill Size
-SEALS	55505SS	.180"430"	3/8"	4	11/16"
	55513SS	.188"500"	1/2"	5	7/8"
	55515SS	.312"625"	1/2"	5	7/8"
읉	55516SS	.188"625"	1/2"	7	7/8"
5	55530SS	.560"750"	3/4"	2	1-1/8"
RD-GARDS	55310SS	.180"310"	3/8"	2	11/16"
	55311SS	.310"440"	3/8"	2	11/16"
	55320SS	.370"500"	1/2"	2	7/8"
	55321SS	.500"570"	1/2"	2	7/8"
8	55330SS	.560"690"	3/4"	1	1-1/8"



TPC WIRE & CABLE CORP.

7061 E. PLEASANT VALLEY RD. INDEPENDENCE, OHIO 44131

800-521-7935 FAX 216-525-4392 CANADA 800-545-0122 MEXICO 800-290-5614 www.tpcwire.com

WARRANTY AND DISCLAIMER: Seller makes no warranties, express or implied, with respect to this product, and seller disclaims any implied warranties of merchantability or fitness for any particular purpose. Further, seller will not be responsible for any consequential, incidental or indirect damages (including, but not limited to, any loss of profit) from any cause whatsoever.

TPC988 (REV. 2/10) PRINTED IN U.S.A. All rights reserved. No portion of this publication, whether in whole or in part, can be reproduced without the express written consent of Premier Farnell, LLC ©Copyright 2010 by Premier Farnell, LLC ®Registered Trademark of Premier Farnell, LLC **Imatemark of P