

OEM Miniature Inertial Measurement Unit And Vertical Gyro



Features & Benefits

- smallest and lightest IMU available on the market
- fully temperature compensated over operational range
- calibrated for sensor misalignment, gyro g-sensitivity, and gyro scale factor non-linearity to third order
- improved performance under vibration, as sensors are sampled at 30 kHz and digitally filtered and scaled into physical units; coning and sculling integrals are computed at 1 kHz
- complementary filter eliminates gyro drift in IMU output
- USB 2.0 and TTL serial communication interfaces
- inertial data up to 1000 Hz
- output includes Euler angles, rotation matrix, deltaTheta, deltaVelocity, quaternion, acceleration, angular rate
- versions available from 1.7 g to 50 g and 50°/s to 1200°/s
- designed for easy integration into a larger circuit board or OEM application
- ROHS compliant

Applications

OEM sensor for use in these applications:

- inertial aiding of GPS
- platform stabilization, artificial horizon
- antenna, satellite and camera pointing
- robotics
- biomechanics, biomedical animation
- automotive, marine, military
- heavy equipment, container handling
- virtual reality, computer science
- reconnaissance, surveillance and target acquisition system


Introduction

The 3DM-GX3® -15-OEM is a high-performance, miniature Inertial Measurement Unit and Vertical Gyro, utilizing MEMS sensor technology. It combines a triaxial accelerometer, triaxial gyro, temperature sensors, and an on-board processor running a sophisticated sensor fusion algorithm to provide static and dynamic orientation, and inertial measurements. Its form factor is ideally suited for OEM applications.

Product Overview

The 3DM-GX3® -15-OEM offers a range of fully calibrated inertial measurements including acceleration, angular rate, deltaTheta and deltaVelocity vectors. It can also output computed orientation estimates including Euler angles (pitch and roll, rotation matrix and quaternion. All quantities are fully temperature compensated and are mathematically aligned to an orthogonal coordinate system. The angular rate quantities are further corrected for g-sensitivity and scale factor non-linearity to third order. The 3DM-GX3® -15-OEM architecture has been carefully designed to substantially eliminate common sources of error such as sensitivity to supply voltage variations. On-board coning and sculling compensation allows for use of lower data output rates while maintaining performance of a fast internal sampling rate.

The 3DM-GX3® -15-OEM is initially sold as a starter kit consisting of an IMU module, USB communication and power cable, software CD, user manual and quick start guide. The circuit board form-factor provides thru-holes for mounting on larger circuit assemblies and custom TTL communication and power cables can be user fabricated or purchased from the factory.

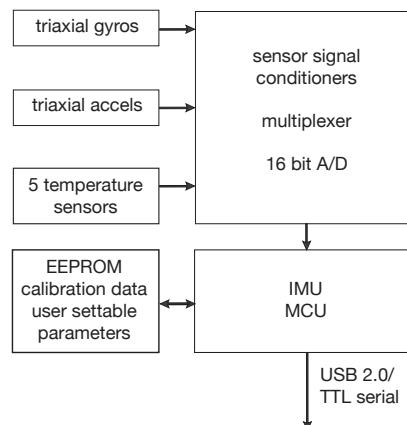

MicroStrain® Little Sensors, Big Ideas.®



Silver Level Winner


www.microstrain.com



IMU Specifications

Attitude and Heading	
Attitude heading range	360° about all 3 axes
Accelerometer range	±5 g standard
Gyroscope range	±300°/sec standard
Static accuracy	±0.5° pitch and roll typical for static test conditions
Dynamic accuracy	±2.0° pitch and roll for dynamic (cyclic) test conditions and for arbitrary angles
Long term drift	eliminated by complementary filter architecture
Repeatability	0.2°
Resolution	<0.1°
Data output rate	up to 1000 Hz
Filtering	sensors sampled at 30 kHz, digitally filtered (user adjustable) and scaled into physical units; coning and sculling integrals computed at 1 kHz
Output modes	acceleration, angular rate, and magnetic field deltaTheta and deltaVelocity, Euler angles, quaternion, rotation matrix

Options	
Accelerometer range	±1.7 g, ±16 g, ±50 g
Gyroscope range	±50°/sec, ±600°/sec, ±1200°/sec

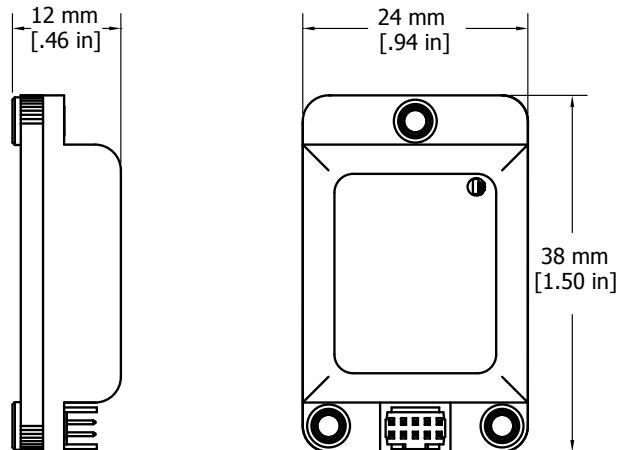

General	
A/D resolution	16 bits SAR oversampled to 17 bits
Interface options	USB 2.0 / TTL serial (3.3 volts)
Baud rate	115,200 bps to 921,600 bps
Power supply voltage	3.1 to 5.5 volts
Power consumption	80 mA @ 5 volts with USB
Connector	Samtec FTS-105-01-F-D-K
Operating temperature	-40 °C to +70 °C
Dimensions	38 mm x 24 mm x 12 mm
Weight	11.5 grams
ROHS	compliant
Shock limit	500 g
Software utility	CD in starter kit (XP/Vista/Win7 compatible)
Software development kit (SDK)	complete data communications protocol and sample code

Sensor Specifications

	Accels	Gyros
Measurement range	±5 g	±300°/sec
Non-linearity	±0.1 % fs	±0.03 % fs
In-run bias stability	±0.04 mg	18°/hr
Initial bias error	±0.002 g	±0.25°/sec
Scale factor stability	±0.05 %	±0.05 %
Noise density	80 µg/√Hz	0.03°/sec/√Hz
Alignment error	±0.05°	±0.05°
User adjustable bandwidth	225 Hz max	440 Hz max
Sampling rate	30 kHz	30 kHz