10/100 Base-Tx 2x4 RJ45

ARJC05-240008

RoHS/RoHS II Compliant



59 x 25.2 x 28.2mm

FEATURES:

- Compliant with IEEE802.3 standard
- 350uH minimum OCL with 8mA bias current
- High performance for maximum EMI suppression
- High reliability 750 mating/unmating cycles

> APPLICATIONS:


- Designed for most leading PHY IC manufacturers such as Broadcom, Marvell, Microsemi
- Supports 10/100 Base-Tapplications
- Provides signal conditioning, EMI suppression and signal isolation

STANDARD SPECIFICATIONS


Operating temperature range: 0°C to +70°C Storage temperature range: -25°C to +85°C

Parameters	Minimum	Typical	Maximum	Units	Notes
Turn Ratio (±3%)	1CT:1CT				Tx and Rx
Inductance	350			uН	100kHz/0.1V@8mADC
Insertion Loss			-1.0	dB	1-100MHz
Return Loss	-18				1-10MHz
	-16			dB	10-30MHz
	-14				30-60MHz
	-12				60-80MHz
	-10				80-100MHz
CMR	-35			dB	1-100MHz
Crosstalk	-35			dB	1-100MHz
Hipot	1500Vrms/1mA/1s				

> MECHANICAL DIMENSIONS

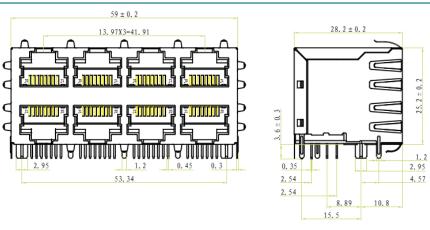

Recommended Land Pattern

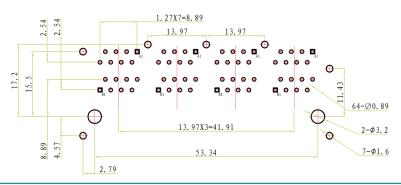

ABRACON IS ISO 9001:2008 CERTIFIED



Dimensions: mm


ARJC05-240008

RoHS/RoHS II Compliant




59 x 25.2 x 28.2mm

SCHEMATICS

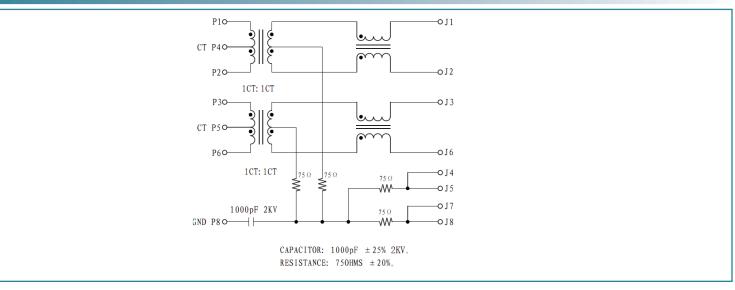

PROFILE OF WAVE SOLDERING

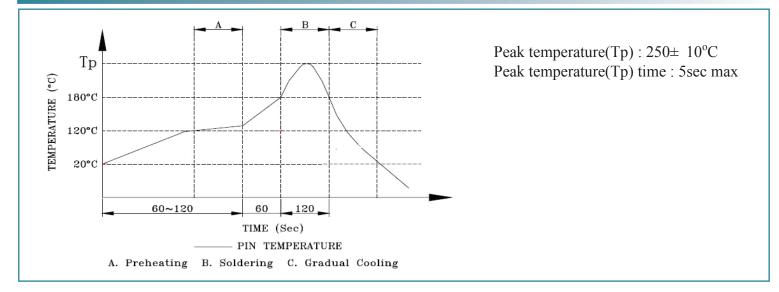

Packing: 10pcs/tray

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



